THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - ,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
AD	39

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	R	REVISED PER ECO-14-000068	26APR2014	NK	MM

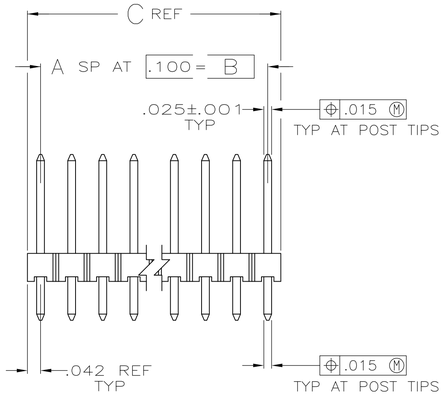

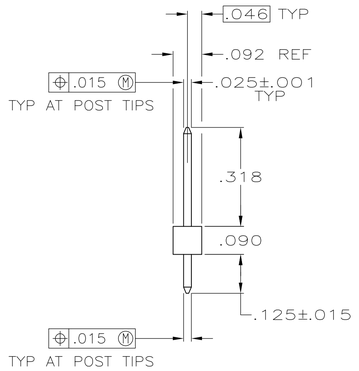

1 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD

2 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS

△3 PACKAGE IN SINGLE TUBES

△4 .000100–.000200 MATTE TIN–LEAD OVER .000050 NICKEL.

△5 .000100–.000200 BRIGHT TIN OVER .000050 NICKEL.

△6 PRELIMINARY PART – NOT RELEASED FOR PRODUCTION.

△7 HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR–BLACK.

△8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



RECOMMENDED HOLE LAYOUT

PLATING	REMARKS	C	B	A	NO OF POSN	PART NUMBER
	△5	.484	.400	4	5	5–103321–3
	△5 △6	1.384	1.300	13	14	5–103321–2
	△5 △6	1.184	1.100	11	12	5–103321–1
	△5 △6	1.084	1.000	10	11	5–103321–0
	△5 △6	.884	.800	8	9	4–103321–9
	△5	3.984	3.900	39	40	4–103321–8
	△5	1.584	1.500	15	16	4–103321–7
	△5	.784	.700	7	8	4–103321–6
	△5	.284	.200	2	3	4–103321–5
	△5	.184	.100	1	2	4–103321–4
	△5 △6	.084	—	—	1	4–103321–3
SUPERSEDED BY 1–103321–4	△3	1.384	1.300	13	14	4–103321–2
SUPERSEDED BY 103321–3	△3	.284	.200	2	3	4–103321–1
	△4	3.984	3.900	39	40	4–103321–0
△8 OBSOLETE	△4	3.884	3.800	38	39	3–103321–9
△8 OBSOLETE	△4	3.784	3.700	37	38	3–103321–8
△8 OBSOLETE	△4	3.684	3.600	36	37	3–103321–7
	△4	3.584	3.500	35	36	3–103321–6
△8 OBSOLETE	△4	3.484	3.400	34	35	3–103321–5
△8 OBSOLETE	△4	3.384	3.300	33	34	3–103321–4
△8 OBSOLETE	△4	3.284	3.200	32	33	3–103321–3
△8 OBSOLETE	△4	3.184	3.100	31	32	3–103321–2
△8 OBSOLETE	△4	3.084	3.000	30	31	3–103321–1
△8 OBSOLETE	△4	2.984	2.900	29	30	3–103321–0
△8 OBSOLETE	△4	2.884	2.800	28	29	2–103321–9
△8 OBSOLETE	△4	2.784	2.700	27	28	2–103321–8
△8 OBSOLETE	△4	2.684	2.600	26	27	2–103321–7
△8 OBSOLETE	△4	2.584	2.500	25	26	2–103321–6
	△4	2.484	2.400	24	25	2–103321–5
△8 OBSOLETE	△4	2.384	2.300	23	24	2–103321–4
△8 OBSOLETE	△4	2.284	2.200	22	23	2–103321–3
△8 OBSOLETE	△4	2.184	2.100	21	22	2–103321–2
△8 OBSOLETE	△4	2.084	2.000	20	21	2–103321–1
△8 SUPERSEDED BY 7–146274–0	△4	1.984	1.900	19	20	2–103321–0
△8 OBSOLETE	△4	1.884	1.800	18	19	1–103321–9
△8 OBSOLETE	△4	1.784	1.700	17	18	1–103321–8
△8 OBSOLETE	△4	1.684	1.600	16	17	1–103321–7
	△4	1.584	1.500	15	16	1–103321–6
△8 OBSOLETE	△4	1.484	1.400	14	15	1–103321–5
	△4	1.384	1.300	13	14	1–103321–4
△8 OBSOLETE	△4	1.284	1.200	12	13	1–103321–3
△8 OBSOLETE	△4	1.184	1.100	11	12	1–103321–2
△8 OBSOLETE	△4	1.084	1.000	10	11	1–103321–1
	△4	.984	.900	9	10	1–103321–0
	△4	.884	.800	8	9	103321–9
	△4	.784	.700	7	8	103321–8
	△4	.684	.600	6	7	103321–7
	△4	.584	.500	5	6	103321–6
	△4	.484	.400	4	5	103321–5
	△4	.384	.300	3	4	103321–4
	△4	.284	.200	2	3	103321–3
	△4	.184	.100	1	2	103321–2
	△4	.084	——	——	1	103321–1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .005
4 PLC ± –
ANGLES ± –

MATERIAL: POST: COPPER ALLOY △7

FINISH: SEE TABLE

DWN J.MARTINELLI 15OCT92
CHK JOHN KNITTLE 23NOV92
APVD B. FLINCHBAUGH 23NOV92

TE Connectivity

NAME: ASSEMBLY, HEADER, BREAKAWAY, MOD II, SINGLE ROW, .100 C/L, VERTICAL, WITH .025 SQUARE POSTS

PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-103321	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV R

4805 (3/11)