



c





d





e

f

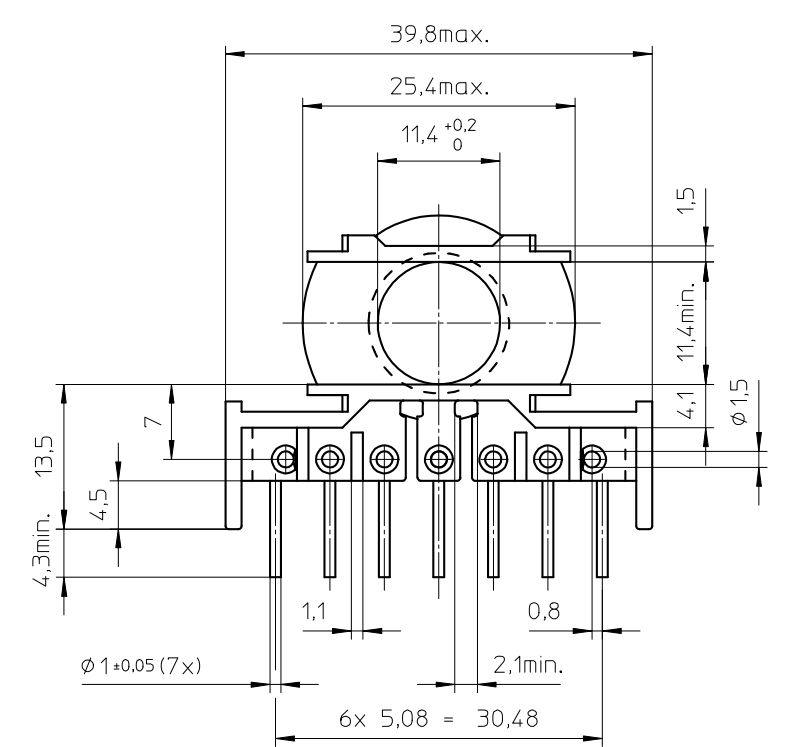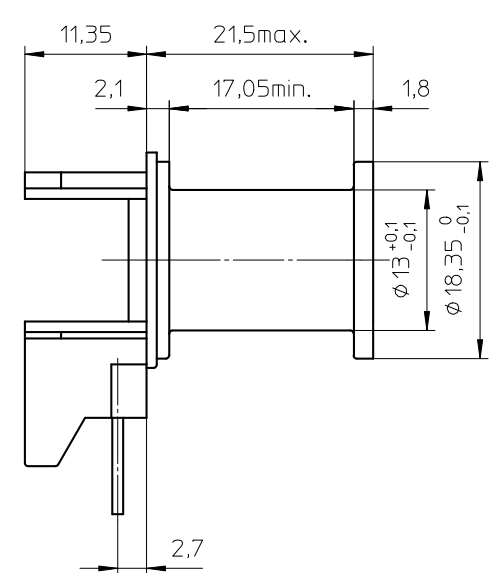

Pin arrangement:  
Scale: 1:1  
Schaal: 1:1

See also drawing 4322 021 04351

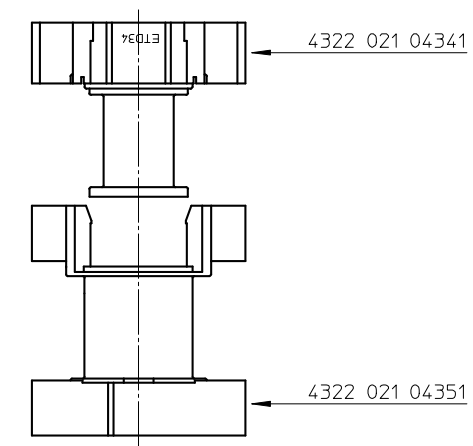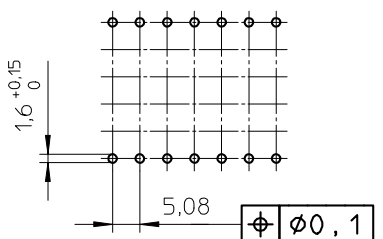

Coil former material: Sumikon PM9630 (PF), glass-reinforced.  
UL file number: E41429 - UL94V-0.  
Pin material: Copperclad steel, Sn plated.  
Max. operating temp.: acc. to IEC 60 085 class H, 180°C.  
Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s.  
Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s.  
Min. winding area: 42,6 mm<sup>2</sup>.  
Mean length of turn: 49,4 mm.

CLASSNO.	CSCI-ETD34-1S-7P-T		4322 021 04341	2002-07-11
				2005-03-08
				2012-10-25
NAME NAAM	M.Marszalek	SUPERS. VERV.	1	SP SH BL BL
MPA	CHECK CONTR.	DAT.	2002-07-11	Property of Eigenaam van
				© FERROXCUBE 2000
				112 - 001
				069
				A3