THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

	STUD SIZE	DIMENSIONS in. [mm]					
PANDUIT PART #		L ± .02 [0,5]	W ± ^{.01} [0,3]	C ± .015 [0,4]	M ± .02 [0,5]	H± .01 [0,3]	
PV12–6HDR	#6	1.05 [26,7]	.31 [7,9]	.35 [8,9]	.89 [22,6]	.15 [3,8]	
PV12-8HDR	#8	1.05 [26,7]	.31 [7,9]	.35 [8,9]	.89 [22,6]	.17 [4,3]	
PV12-10HDR	#10	1.08 [27,4]	.37 [9,4]	.33 [8,4]	.89 [22,6]	.20 [5,1]	
PV12–14HDR	1/4"	1.23 [31,2]	.52 [13,2]	.42 [10,7]	.97 [24,6]	.27 [6,9]	
PV12-56HDR	5/16"	1.23 [31,2]	.52 [13,2]	.42 [10,7]	.97 [24,6]	.34 [8,6]	
PV12–38HDR	3/8"	1.31 [33,3]	.58 [14,7]	.46 [11,7]	1.02 [25,9]	.40 [10,2]	


В

NOTES: 1. USED FOR: A. #16-12 AWG [2,0-6,0 mm²] STRANDED COPPER WIRE

B. 221 °F [105 °C] MAX. OPERATING TEMPERATURE C. 600 V. MAX. VOLTAGE RATING

2

- 2. INSTALLATION TOOLS:
 - A. UL APPROVED: CT-600A (CT-550CH), CT-1550, CT-1551, CT-2500 (CT-2550CH) B. PANDUIT APPROVED: CT-460
- 3. WIRE STRIP LENGTH: 9/32" +1/32 [7, 1+0,8]
- 4. MATERIAL: A. STAMPING: .05" [1,3] THK COPPER, TIN PLATED B. HOUSING: VINYL, YELLOW
- 5. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- 6. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

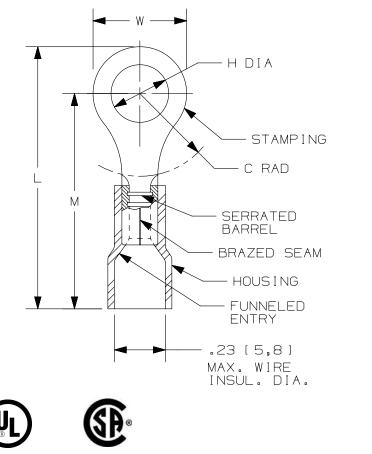

В



ED 2

D	CERTIFI
ł	LR3121
;4	

D101	REV	DATE	BY	СНК	APR		ECN	DAW - - N.T.S. SHT 1 0F 1 A	
000								DRAWN BY DATE CHK SCALE SIZE	
IA/15	04	10.16.12	JBN	LCA	VMB	REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS.	A41281	THIRD ANGLE PROJECTION A 41281	
								.x ± .1 [2.54] .xxx ± .005 [.13] .113] .xx ± .01 [.25] ANGLES ± 5 ° .113]	
								UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	
								N41281BA_DC/04A	
								DATASET FILE NAME	
								CUSTOMER DRAWING	
Α								#16-12	A
				RING TERMINALS, VINYL INSULATED, HEAVY DUTY					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

PV12-6HDR-L PV12-56HDR-L PV12-14HDR-L PV12-8HDR-L PV12-10HDR-D