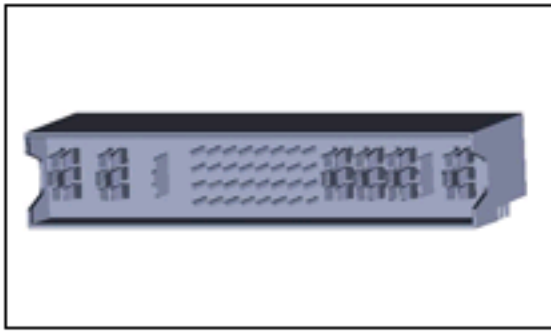


6450849-7 Product Details

[Share](#) | [Print](#) | [Email](#)


6450849-7

TE Internal Number: 6450849-7

Active

[View 3D PDF](#)

MULTI-BEAM XL and MULTI-BEAM XLE Connectors

[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Product Series = XLE
- Board-to-Board
- Header
- Connector Style = Plug
- Contact Type = Pin

[View all Features](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [RIGHT ANGLE HEADER ASSEMBLY NO GUIDES MULTI-BEAM XLE](#) (PDF, English)

Catalog Pages/Data Sheets:

- [2 PIECE POWER CONNECTORS grq 4-1773458-1](#) (PDF, English)

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version 2)
- [3D Model](#) (IGES, Version 2)
- [3D Model](#) (STEP, Version 2)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Series](#) = XLE
- Connector Type = Header
- [Mount Angle](#) = Right Angle
- [Termination Style](#) = Press Fit
- Mating Type = Friction Fit
- [PCB Mount Retention](#) = With
- Guides = Without

Electrical Characteristics:

- Mating Functionality = Standard
- Voltage Rating (Signal) (VAC) = 60
- Voltage Rating (Power) (VDC) = 60

Termination Features:

- Termination Post Length (mm [in]) = 1.20 [0.047]

Body Features:

- [Sequencing](#) = No
- [PCB Mount Retention Type](#) = Compliant Posts
- Connector Configuration Orientation = Left-to-Right
- Centerline, DC Module (mm [in]) = 2.54 [0.100]
- Centerline, AC Module (mm [in]) = 2.54 [0.100]
- Centerline, Matrix (mm [in]) = 2.54 x 2.54 [.100 x .100]

Contact Features:

- Contact Type = Pin
- Contact Material (Power) = High Conductivity Copper
- Contact Material (Signal) = Copper Alloy
- Contact Plating, Mating Area, Material = Gold (30)

Housing Features:

- Connector Style = Plug
- Housing Material = High Temperature Thermoplastic

Configuration Features:

- [Total Number of DC Power](#) = 6
- [Total Number of AC Power](#) = 2
- Total Number of Coax = 0
- [Total Number of Signal](#) = 32
- Connector Contact Configuration (No. of Pos./Type) = 2/AC Power, 1/Low Power, 32/Signal, 3/High Power, 1/Low Power, 1/High Power

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not reviewed for lead free solder process
- RoHS/ELV Compliance History = Always was RoHS compliant

Operation/Application:

- Application Use = Board-to-Board

Other:

- Brand = AMP

Corporate Information

- [Who We Are](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage your Account](#)

Keep Me Informed

Receive TE News, Events & Technology Updates

