

Staying tough at the top



When it comes to professional connecting devices with machined precision contacts (read: IC-sockets, PCB connectors and allied products) you can consider Preci-Dip as one of the top addresses in the world.

Preci-Dip's skill and manufacturing experience, combined with a strongly dedicated sales organisation, offer you total security, all over the world. Security in terms of quality. Of timely deliveries. And last but not least: of price.

Play it safe and call the top address for your needs of Sockets and Strips, of Carriers, PGAs and PCB Connectors and of customized products – for YOUR security and peace of mind.

PRECI-DIP

DURTAL

Thanks to the highly automated precision machining division at the Preci-Dip production plant, most Preci-Dip products come with high quality machined contacts for additional safety and durability.

Machined precision contacts

Preci-Dip's contact technology for receptacles uses three, four or six finger clips made of CuBe and housed in a machined brass sleeve. Platings can be different for both parts, e.g. tin for the sleeve, gold for the clip.

Contact clips are produced on modern, high speed precision stamping machines and inserted – after plating of both parts – into the sleeve on fully automatic assembly lines. Receptacles made by Preci-Dip are of extremely good reliability and have excellent performances with respect to shock and vibration, number of matings, contact resistance, etc... One of the most important features, however, is the closed design of the sleeve which makes it absolutely safe against flux wicking during the soldering process.




Insertion diameter and contact point

Insertion diameter and contact point of the receptacles may vary depending on contact type.

These relevant values are normally indicated on each catalog drawing representing a receptacle:

- insertable pin diameter (0.40–0.56 mm) or rectangle (0.25 × 0.45 mm) is shown on top of part
- distance between contact point and upper edge of receptacle (2.4 mm) is shown on left side of part.



Male contacts

Male contacts have cylindrical, machined pins. In comparison to pins with square or rectangular section, this provides for smoother insertion/extraction with more constant forces, longer life and higher reliability.

The terminations of machined contacts are rugged and accurately positioned; bending of leads by inadvertence is almost excluded which makes handling very easy.

Interconnect components

Machined pins are ideally suited for all kinds of board-to-board interconnecting applications. Their ruggedness and precision are major advantages when reliability and sturdiness of the mechanical assembly are major requirements.

Interconnect contacts are available in a variety of different lengths to suit a maximum number of applications.

They are mostly fitted to single or double row strip insulators but they are also available on dual-in-line or other body styles.

The fact of these contacts being machined allows to manufacture customer specific lengths with no or very little tooling cost.

Insulator bodies

Precision injection molded insulator bodies are made of temperature resistant thermoplastic material, to withstand soldering heat and climatic requirements. All the plastic materials used on Preci-Dip products are UL 94-V0 rated.



Contact strips have a notched design. The insulators are thus easy to cut to any length – in most cases without any loss of contact.

Carriers

Disposable insulators made of recycled plastic material with carrier pins and plugged-on contacts are used on Preci-Dip's unique carrier sockets and strips.

These carriers are rugged and have the same rigidity and precision as the standard sockets and strips. In comparison to flexible carrier solution, Preci-Dip carriers are as easy to handle as normal precision sockets and strips.

All styles of insulator bodies including PGAs can be equipped for carrier applications.

Products with stamped contacts

Some Preci-Dip product lines come with stamped contact versions. Please refer to respective product pages for detailed information.

Technical specifications

Materials

- Insulator: Glass filled thermoplastic polyester, self extinguishing UL 94 V-0, colour black, resistant to mineral acids, solvents, greases, oils (short time).
- Receptacle contact:
 - Sleeve: Screw-machined brass (QQ-B-626), gold or tin-lead plated (90/10) over 2–3 μm nickel
 - Clip: Stamped beryllium-copper (QQ-C-533), gold or tin-lead (90/10) plated over 2–3 μm nickel
- Pin contact: Screw-machined brass (QQ-B-626) or phosphor bronze (QQ-B-750), gold or tin-lead plated (90/10) over 2–3 μm nickel

	Series			
	850	830	800	300/400/ 700

Mechanical data

- | | | | | |
|------------------------------|-----------------|------|----------------|------|
| – Insertion characteristics* | | | | |
| – Gauge diameter (mm): | 0.43 | 0.46 | 0.76
(1 mm) | 0.46 |
| – Insertion force (N): | 1.2 | 1 | 1.2 | 1.8 |
| – Withdrawal force (N): | 0.6 | 0.5 | 0.6 | 1 |
| – Mechanical life: | min. 500 cycles | | | |
- * (measured with a polished steel gauge, typical values)

Electrical data

- | | | | | |
|---|--|-----|----------|-----|
| – Rated current (A): | 1 | 3 | 3 | 1 |
| – Rated voltage: | 100 V _{RMS} / 150 V _{DC} | | | |
| – Max contact resistance (m Ω): | 20 | 10 | 10 | 10 |
| – Insulation resistance: | 10 000 M Ω min. | | | |
| – Dielectric strength: | 1000 V _{RMS} min. | | | |
| – Air and creepage distances (mm): | 0.4/0.5 | 0.5 | 0.85/0.7 | 0.7 |
| – Capacitance (pF): | 1 | 1 | 1 | 0.8 |

Environmental data

- | | |
|--|---|
| – Operating temperature: | –55/+125 °C |
| – Vibration
(10–2000 Hz, 15 g): | no electrical discontinuity > 1 μs |
| – Shock: (50 g): | no electrical discontinuity > 1 μs |
| – Solderability
(IEC 68-2-54 Ta): | 235 °C, 5 s |
| – Resistance to soldering heat:
(IEC 68-2-20 Tb): | 260 °C, 5 s |
| – Resistance to atmospheric corrosion: | IEC 68-2-42 and 43 |
| – Climatic category (IEC): | 55/125/21 |

PRECI-DIP


DURTAL

Series 850


PCB connectors 1.27 mm

Single row / double row / triple row

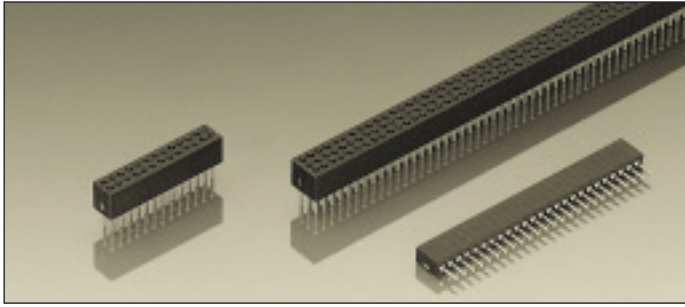Solder tail



Ultraminiature PCB receptacles, solder tail






Grid spacing 1.27×1.27 mm

Receptacle for pins

Ø 0.35–0.45 mm


For corresponding pin connectors see pages 13, 14 and 15

Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
99	5 µm Sn Pb	5 µm Sn Pb	

Ordering information

Replace **xxx** with the number of poles, e.g. 853-91-**xxx**-10-001 for a double row version with 8 pins per row becomes:

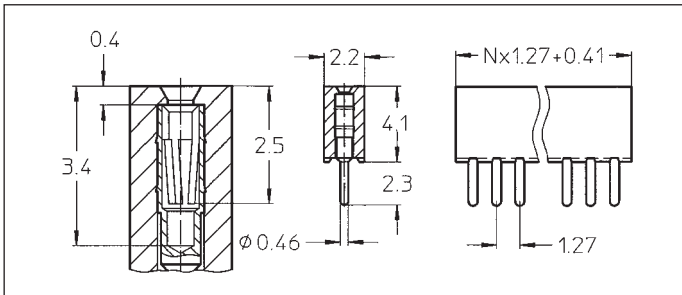853-91-**016**-10-001




851-91-xxx-10-001

851-93-xxx-10-001

851-99-xxx-10-001

Straight receptacle: solder tail, single row

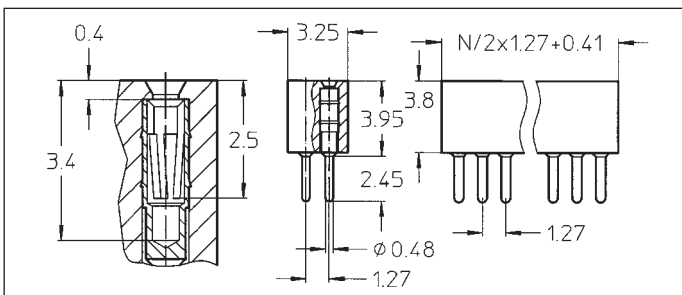Availability from: 1 to 50 contacts
Standard number of contacts 25 and 50




853-91-xxx-10-001

853-93-xxx-10-001

853-99-xxx-10-001

Straight receptacle: solder tail, double row

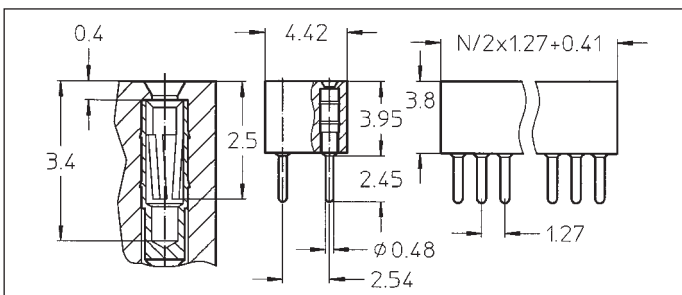Availability from: 4 to 100 contacts
Standard number of contacts 50 and 100




853-91-xxx-10-002

853-93-xxx-10-002

853-99-xxx-10-002

Straight receptacle: solder tail, double row with 2.54 mm row to row distance

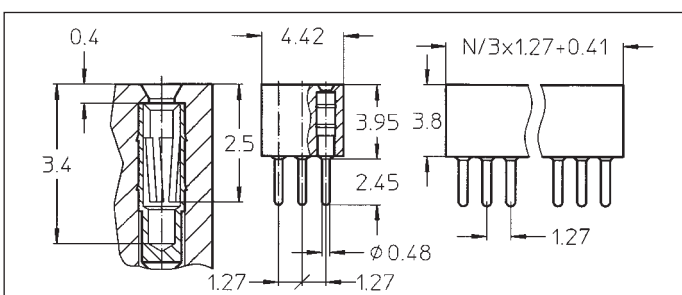Availability from: 4 to 100 contacts
Standard number of contacts 100



855-91-xxx-10-001

855-93-xxx-10-001

855-99-xxx-10-001

Straight receptacle: solder tail, triple row


Availability from: 9 to 150 contacts
Standard number of contacts 150

Series 850

PCB connectors 1.27 mm

Single row / double row / triple row

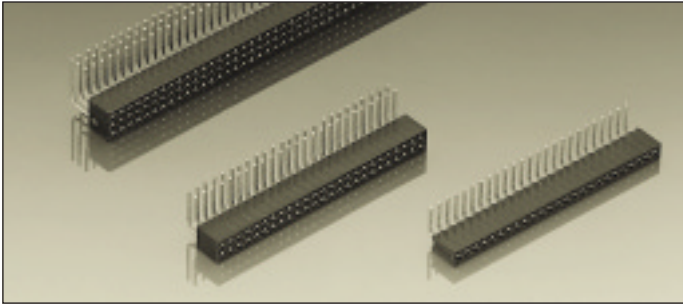Solder tail




Ultraminiature PCB receptacles, solder tail




Grid spacing 1.27×1.27 mm

Receptacle for pins

Ø 0.35–0.45 mm

For corresponding pin connectors see pages 13, 14 and 15




Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
99	5 µm Sn Pb	5 µm Sn Pb	

Ordering information

Replace **xxx** with the number of poles, e.g. 853-91-**xxx**-20-001 for a double row version with 8 pins per row becomes:

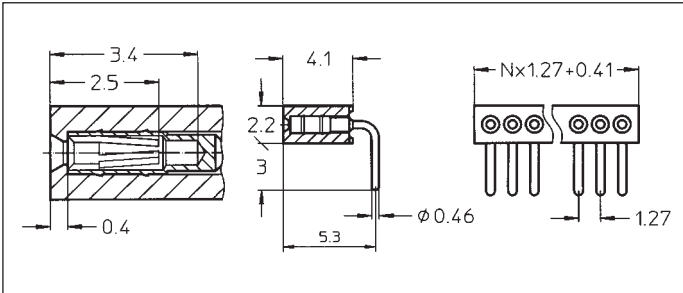
853-91-**016**-20-001



851-91-xxx-20-001
851-93-xxx-20-001
851-99-xxx-20-001

Right angle receptacle: solder tail, single row

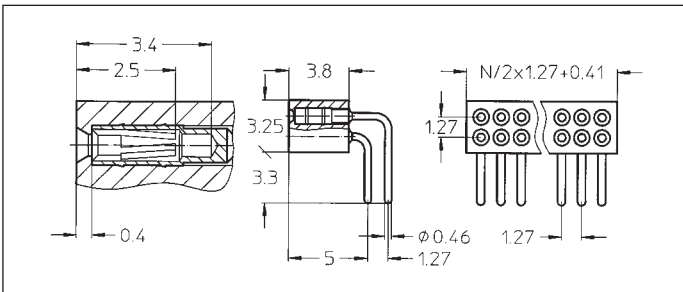
Availability from: 1 to 50 contacts
Standard number of contacts 25 and 50



853-91-xxx-20-001
853-93-xxx-20-001
853-99-xxx-20-001

Right angle receptacle: solder tail, double row

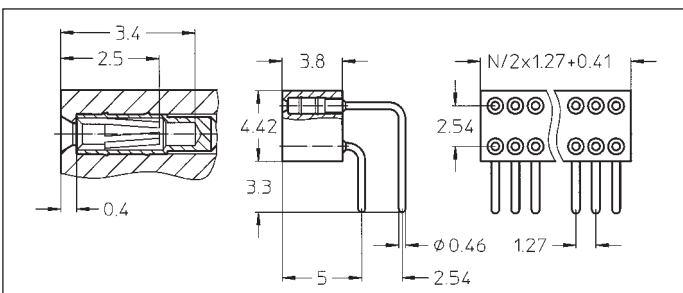
Availability from: 4 to 100 contacts
Standard number of contacts 50 and 100



853-91-xxx-20-002
853-93-xxx-20-002
853-99-xxx-20-002

Right angle receptacle: solder tail, double row with 2.54 mm row to row distance

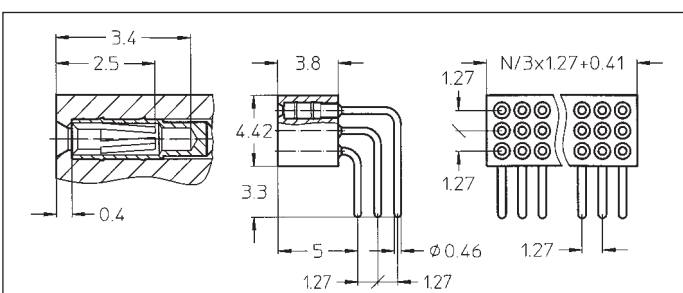Availability from: 4 to 100 contacts
Standard number of contacts 100



855-91-xxx-20-001
855-93-xxx-20-001
855-99-xxx-20-001

Right angle receptacle: solder tail, triple row


Availability from: 6 to 150 contacts
Standard number of contacts 150

Series 850

PCB connectors 1.27 mm

Single row / double row

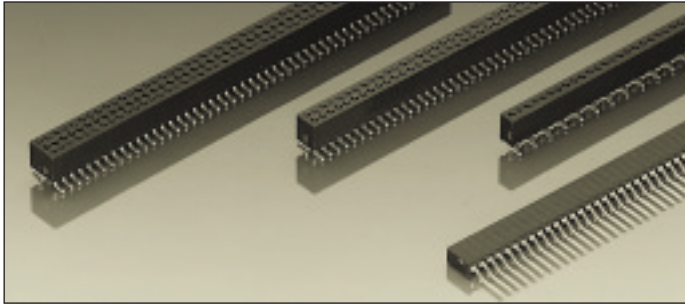Surface mount






Ultraminiature PCB receptacles, surface mount



Grid spacing 1.27×1.27 mm

Receptacles for pins Ø 0.35–0.45 mm


For corresponding connectors see pages 13, 14 and 15

Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
99	5 µm Sn Pb	5 µm Sn Pb	

Ordering information

Replace **xxx** with the number of poles, e.g. 853-91-**xxx**-30-001 for a double row version with 8 pins per row becomes:

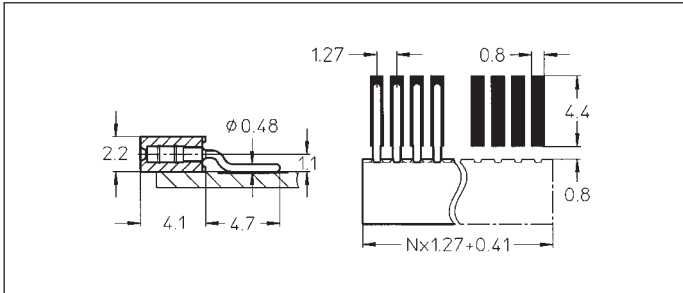853-91-**016**-30-001




851-91-xxx-40-001

851-93-xxx-40-001

851-99-xxx-40-001

SMD receptacle: single row, parallel mount

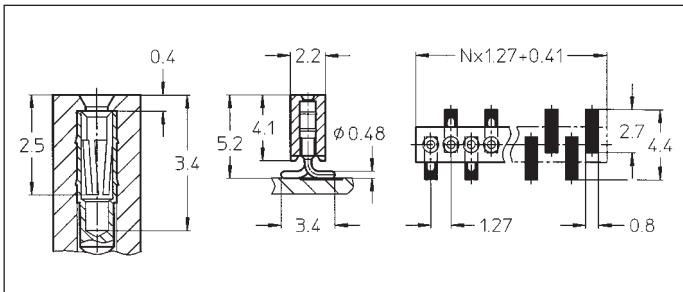Availability from: 1 to 50 contacts
Standard number of contacts 25 and 50




851-91-xxx-30-001

851-93-xxx-30-001

851-99-xxx-30-001

SMD receptacle: single row, perpendicular mount

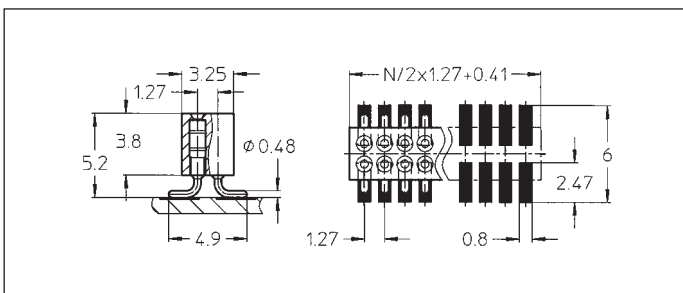Availability from: 3 to 50 contacts
Standard number of contacts single row: 25 and 50




853-91-xxx-30-001

853-93-xxx-30-001

853-99-xxx-30-001

SMD receptacle: double row, perpendicular mount

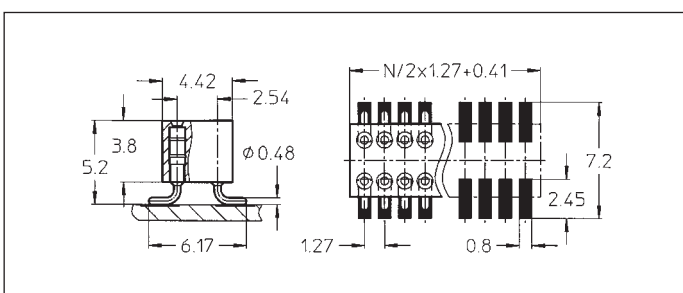Availability from: 4 to 100 contacts
Standard number of contacts 50 and 100



853-91-xxx-30-002

853-93-xxx-30-002

853-99-xxx-30-002

SMD receptacle: double row with 2.54 mm distance, perpendicular row to row mount


Availability from: 4 to 100 contacts
Standard number of contacts 100
On request with positioning pins

Series 850

PCB connectors 1.27 mm

Single row / double row / triple row

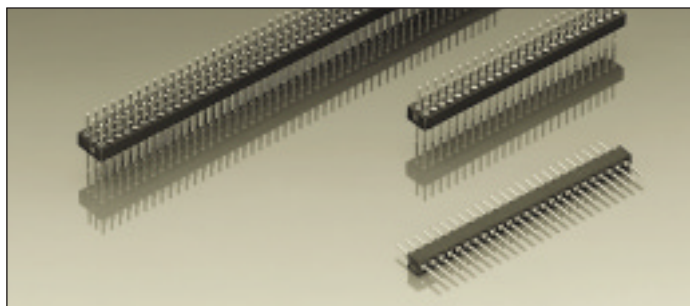
Solder tail






Ultraminiature PCB pin connectors, solder tail

Grid spacing 1.27×1.27 mm

Screw-machined pin Ø 0.43 mm




For corresponding receptacles see pages 10, 11 and 12

Platings	Sleeve 	Clip 	Pin 
10 90			0.25 µm Au 5 µm Sn Pb

Ordering information

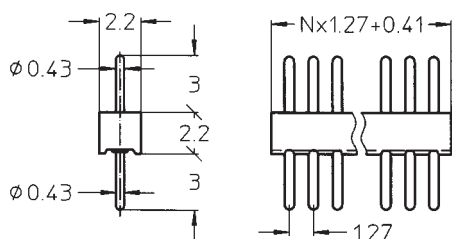
Replace **xxx** with the number of poles, e.g. 852-10-**xxx**-10-001
for a double row version with 8 pins per row becomes:
852-10-**016**-10-001



850-10-xxx-10-001
850-90-xxx-10-001

Straight pin connector: solder
tail, single row

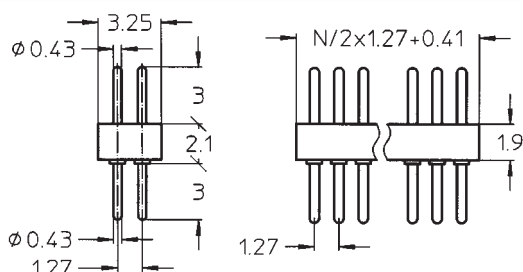
Availability from: 1 to 50 contacts
Standard number of contacts 25
and 50



852-10-xxx-10-001
852-90-xxx-10-001

Straight pin connector: solder
tail, double row

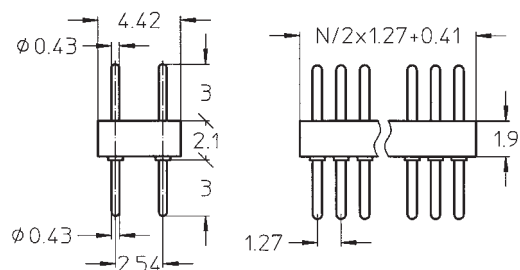
Availability from: 4 to 100
contacts
Standard number of contacts 50
and 100



852-10-xxx-10-002
852-90-xxx-10-002

Straight pin connector: solder
tail, double row with 2.54 mm
row to row distance

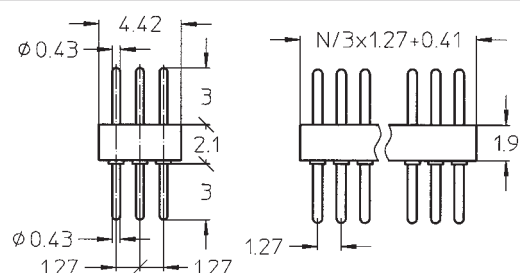Availability from: 4 to 100
contacts
Standard number of contacts 100



854-10-xxx-10-001
854-90-xxx-10-001

Straight pin connector: solder
tail, triple row


Availability from: 9 to 150
contacts
Standard number of contacts 150

Series 850

PCB connectors 1.27 mm

Single row / double row / triple row

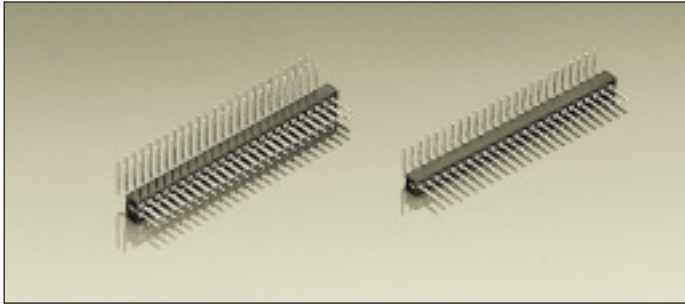
Solder tail






Ultraminiature PCB pin connectors, solder tail

Grid spacing 1.27×1.27 mm

Screw-machined pin Ø 0.43 mm




For corresponding receptacles see pages 10, 11 and 12

Platings	Sleeve 	Clip 	Pin 
10 90			0.25 µm Au 5 µm Sn Pb

Ordering information

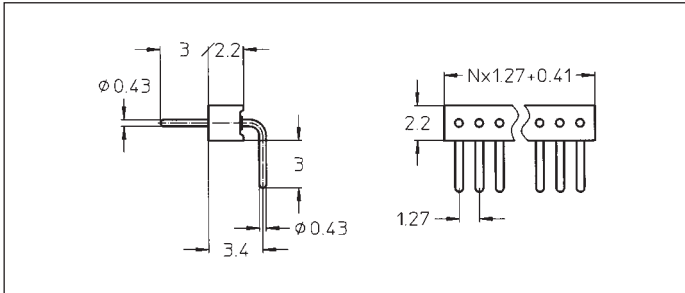Replace **xxx** with the number of poles, e.g. 852-10-**xxx**-20-001 for a double row version with 8 pins per row becomes:
852-10-**016**-20-001




850-10-xxx-20-001

850-90-xxx-20-001

Right angle pin connector: solder tail, single row

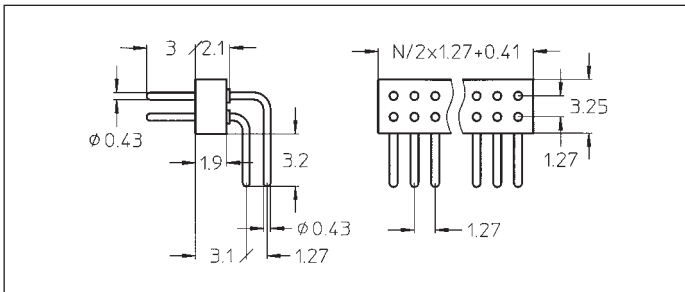Availability from: 1 to 50 contacts
Standard number of contacts 25 and 50




852-10-xxx-20-001

852-90-xxx-20-001

Right angle pin connector: solder tail, double row

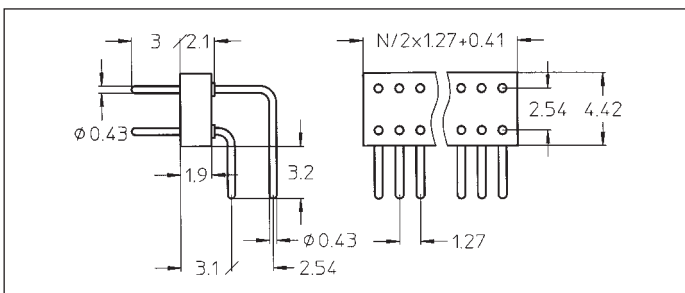Availability from: 4 to 100 contacts
Standard number of contacts 50 and 100




852-10-xxx-20-002

852-90-xxx-20-002

Right angle pin connector: solder tail, double row with 2.54 mm row to row distance

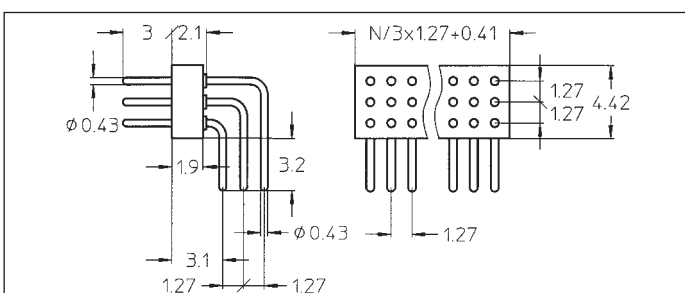Availability from: 4 to 100 contacts
Standard number of contacts 100



854-10-xxx-20-001

854-90-xxx-20-001

Right angle pin connector: solder tail, triple row


Availability from: 6 to 150 contacts
Standard number of contacts 150

Series 850

PCB connectors 1.27 mm

Single row / double row

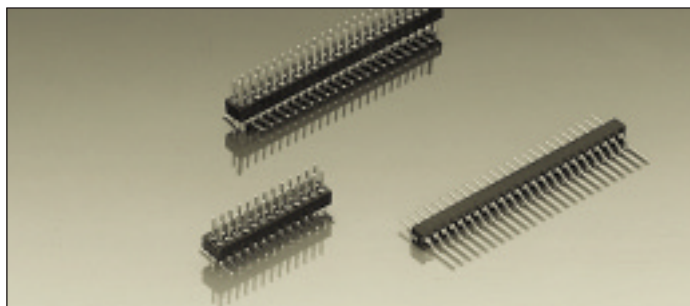Surface mount






Ultraminiature PCB pin connectors, surface mount

Grid spacing 1.27×1.27 mm




Pin connectors with screw-machined pin $\varnothing 0.43$ mm

For corresponding connectors see pages 10, 11 and 12

Platings	Sleeve 	Clip 	Pin 
10 90			0.25 μ m Au 5 μ m Sn Pb

Ordering information

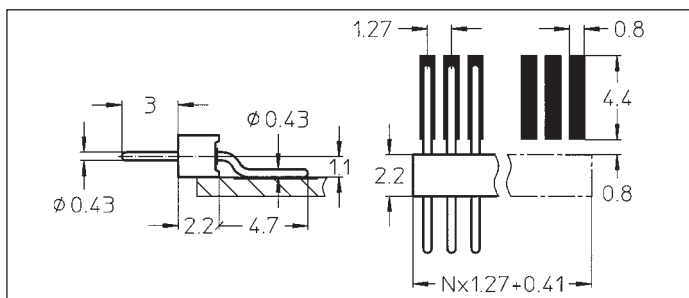Replace **xxx** with the number of poles, e.g. 852-10-**xxx**-30-001 for a double row version with 8 pins per row becomes:
852-10-**016**-30-001




850-10-xxx-40-001

850-90-xxx-40-001

SMD pin connector: single row, parallel mount

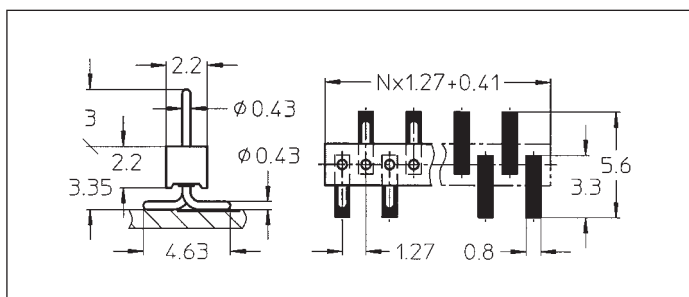Availability from: 1 to 50 contacts
Standard number of contacts 25 and 50




850-10-xxx-30-001

850-90-xxx-30-001

SMD pin connector: single and double row, perpendicular mount

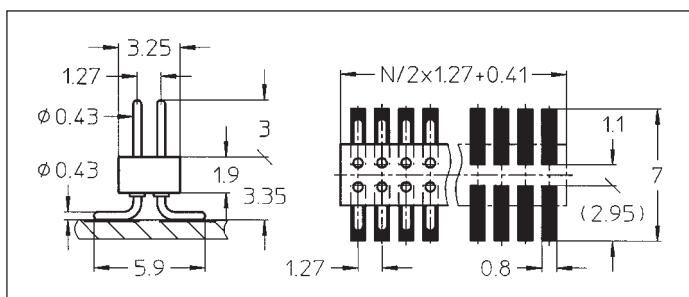Availability from: 3 to 50 contacts
Standard number of contacts 25 and 50




852-10-xxx-30-001

852-90-xxx-30-001

SMD pin connector: double row, perpendicular mount

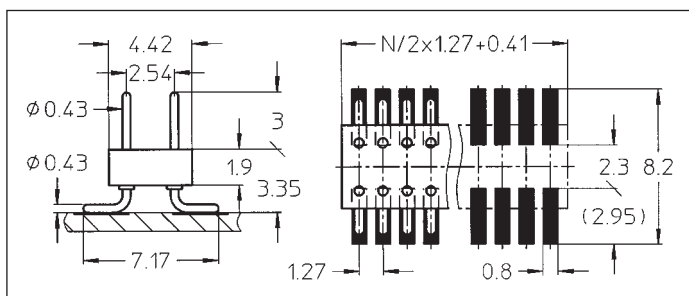Availability from: 4 to 100 contacts
Standard number of contacts 50 and 100



852-10-xxx-30-002

852-90-xxx-30-002

SMD pin connector: double row with 2.54 mm row to row distance, perpendicular mount

Availability from: 4 to 100 contacts
Standard number of contacts 100
On request with positioning pins

CONNECTOR WITH SPRING LOADED CONTACTS

Preci-Dip is introducing a new type of contact that can be proposed for connectors with very high cycle count in the range of 10 000 or more. The electrical connection is made with a spring loaded contact pin that is pressed against a fixed plate. The basic design is made to be easily adapted to various requirements of contact force and stroke, contact pitch and height of the connector.

Two different contact types are currently available:

- the original design for small pitch implementation down to 1.25 mm, and with solder tail
- a "very-low-profile" design with about 4.5 mm height with a working stroke of about 1mm; the min pitch is 2.54 mm and SMD termination.

Typical field of application:

- mobile phone, radio telephone and other portable telecom equipment
- battery loader for appliance, audio and video equipment
- portable computer (note book) and portable data acquisition and processing equipment
- test equipment.

Availability:

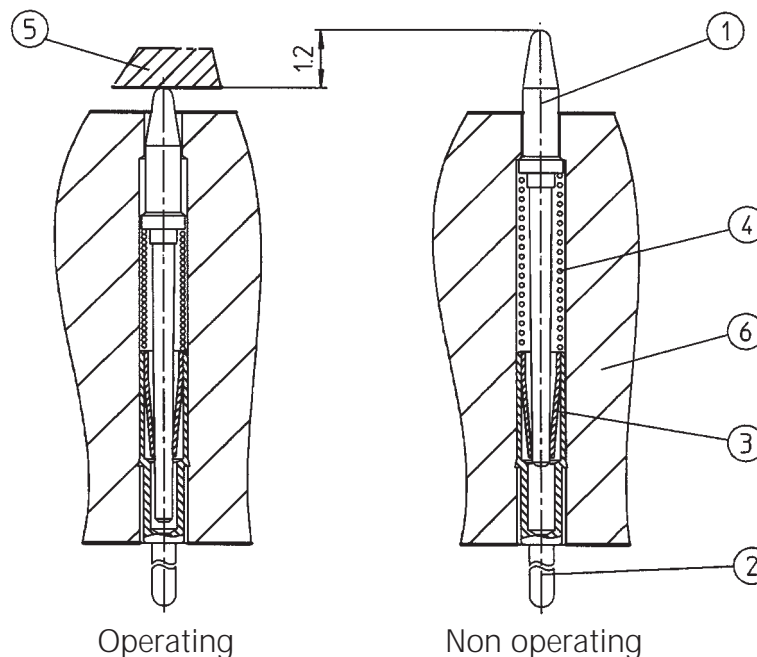
Samples for evaluation and functional tests available now.

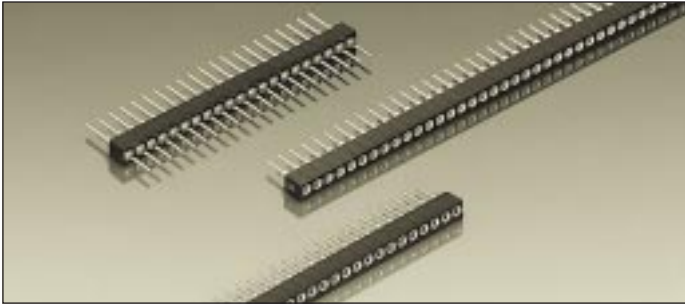
Custom specific connector with new housing and/or particular connection side, but with the standard contact elements, please consult.

Contact with other specifications like stroke/force characteristics or electrical values on request.

Operating principle:

The electrical connection is made from the moving, spring actuated pin or plunger ① to the fixed wiring end of the connector ② by a multifinger sliding contact ③. The moving contact pin is actuated by a compression spring ④ assuring pressure against the fixed contact counterpart ⑤. Parts ① to ④ are fixed together by the plastic connector housing ⑥. Standard wiring is for PCB through hole soldering, but SMD version will be available.








Receptacles and pin connectors, solder tail


With reduced grid spacing 1.778 and 1.8 mm



Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0,25 µm Au	0,25 µm Au 5 µm Sn Pb
93	5 µm Sn Pb	0,75 µm Au	
97	5 µm Sn Pb	Goldflash	
99	5 µm Sn Pb	5 µm Sn Pb	
10			
90			

Ordering information

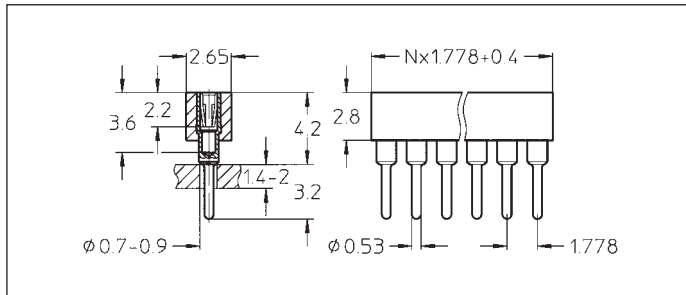
Replace **xx** with the number of poles, e.g. 317-91-1**xx**-41-005 for a single row version with 8 contacts per row becomes:
317-91-**108**-41-005



317-91-1xx-41-005
317-93-1xx-41-005
317-97-1xx-41-005
317-99-1xx-41-005

Straight receptacle: single row, accepts pin Ø 0.40–0.56 mm, grid spacing 1.778 mm

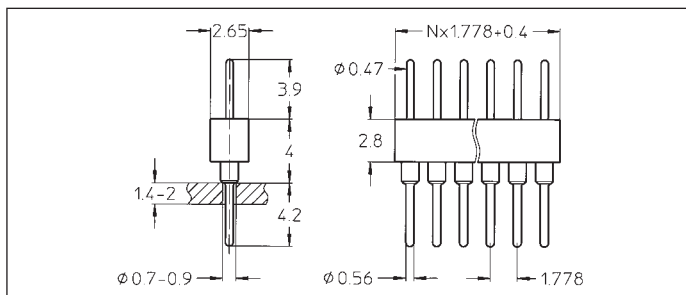
Availability from: 1 to 38 contacts
Standard number of contacts 21 and 38



350-10-1xx-00-012
350-90-1xx-00-012

Straight pin connector: single row, grid spacing 1.778 mm, screw-machined pin Ø 0.47 mm

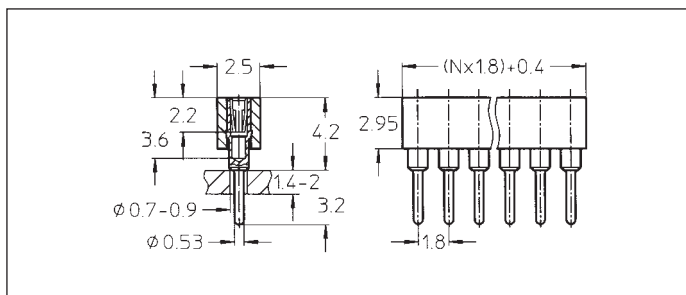Availability from: 1 to 38 contacts
Standard number of contacts 21 and 38




317-91-1xx-01-687
317-93-1xx-01-687
317-99-1xx-01-687

Straight receptacle: single row, accepts pin Ø 0.40–0.56 mm, grid spacing 1.8 mm for LCD-displays

Availability from: 1 to 42 contacts
Standard number of contacts 42


Series 830

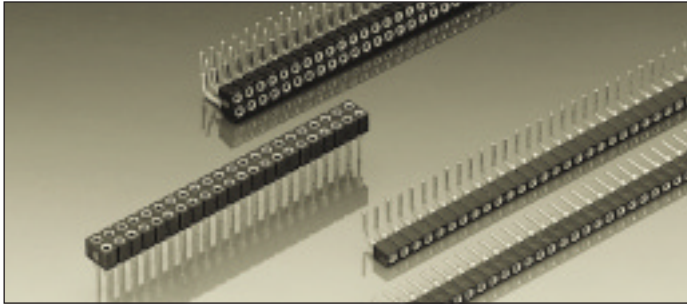PCB connectors 2.0 mm
Single row / double row
Solder tail






"Hard metric" PCB receptacles solder tail

Grid spacing 2.0×2.0 mm
Receptacle for pins
Ø 0.40–0.56 mm




For corresponding pin connectors see pages 19 and 20

Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
99	5 µm Sn Pb	5 µm Sn Pb	


Ordering information

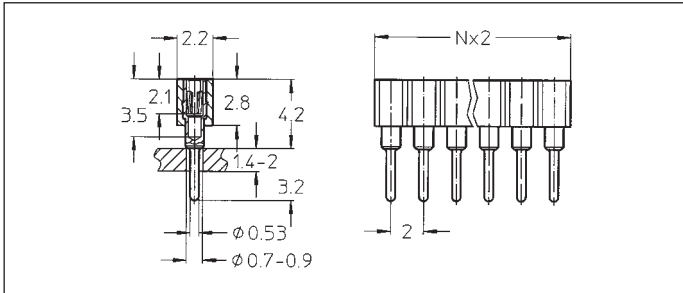Replace **xxx** with the number of poles, e.g. 833-93-**xxx**-10-001
for a double row version with 8 pins per row becomes:
833-93-**016**-10-001




831-91-xxx-10-001
831-93-xxx-10-001
831-99-xxx-10-001

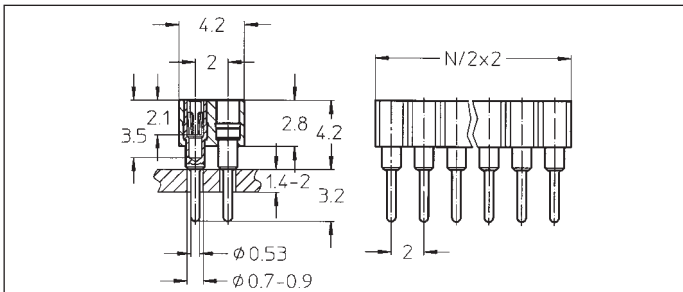Straight receptacle: solder tail,
single row
Availability from: 1 to 50 contacts
Standard number of contacts 50




833-91-xxx-10-001
833-93-xxx-10-001
833-99-xxx-10-001

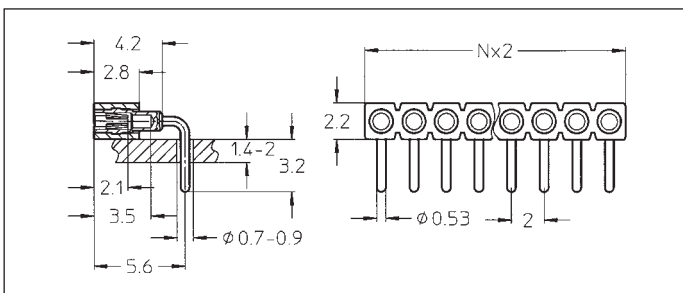Straight receptacle: solder tail,
double row
Availability from: 4 to 100
contacts
Standard number of contacts 100



831-91-xxx-20-001
831-93-xxx-20-001
831-99-xxx-20-001

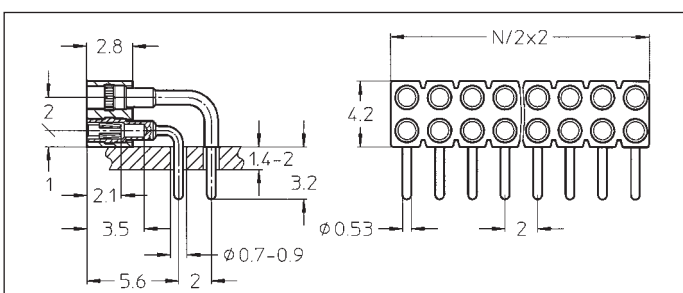Right angle receptacle: solder tail,
single row
Availability from: 1 to 50 contacts
Standard number of contacts 50




833-91-xxx-20-001
833-93-xxx-20-001
833-99-xxx-20-001

Right angle receptacle: solder tail,
double row
Availability from: 4 to 100
contacts
Standard number of contacts 100


Series 830

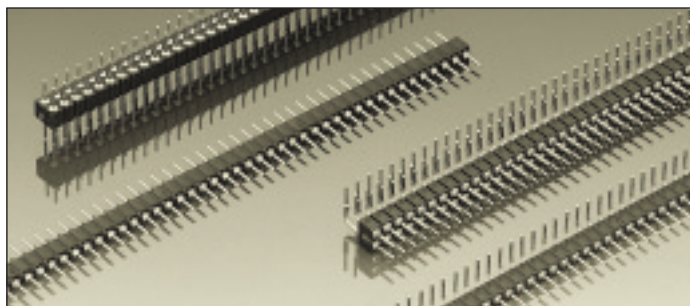PCB connectors 2.0 mm
Single row / double row
Solder tail






"Hard metric" PCB pin connectors, solder tail

Grid spacing 2.0×2.0 mm
Screw-machined pins
Ø 0.46–0.47 mm




For corresponding receptacles see pages 18, 20 and 21

Platings	Sleeve 	Clip 	Pin 
10 90			0.25 µm Au 5 µm Sn Pb

Ordering information

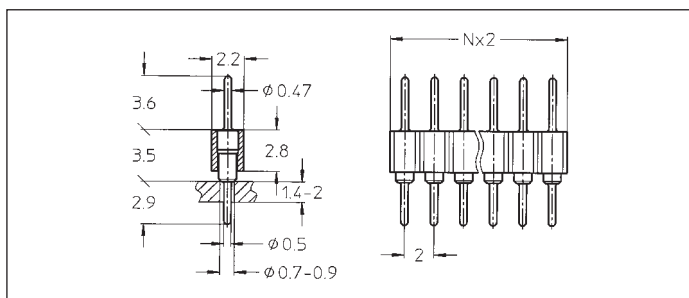
Replace **xxx** with the number of poles, e.g. 832-10-**xxx**-20-001
for a double row version with 8 pins per row becomes:
832-10-**016**-20-001



830-10-xxx-10-001
830-90-xxx-10-001

Straight pin connector: solder
tail, single row

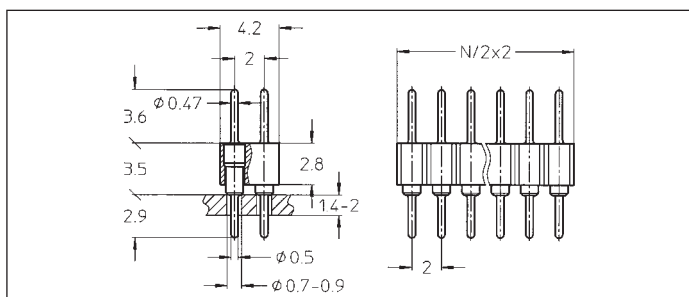
Availability from: 1 to 50 contacts
Standard number of contacts 50



832-10-xxx-10-001
832-90-xxx-10-001

Straight pin connector: solder
tail, double row

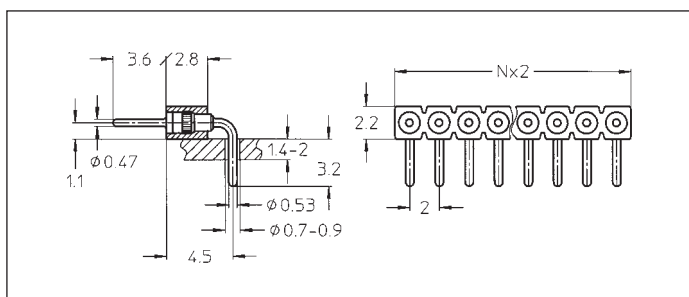
Availability from: 4 to 100
contacts
Standard number of contacts 100



830-10-xxx-20-001
830-90-xxx-20-001

Right angle pin connector: solder
tail, single row

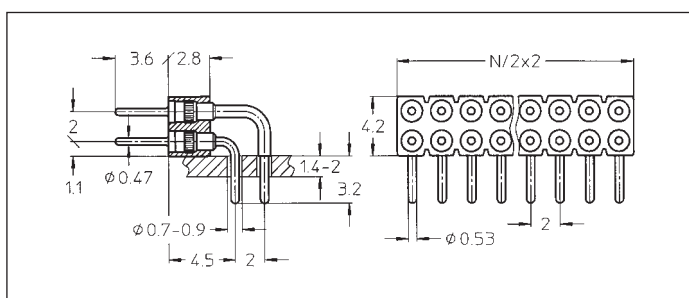Availability from: 1 to 50 contacts
Standard number of contacts 50




832-10-xxx-20-001
832-90-xxx-20-001

Right angle pin connector: solder
tail, double row


Availability from: 4 to 100
contacts
Standard number of contacts 100

Series 830

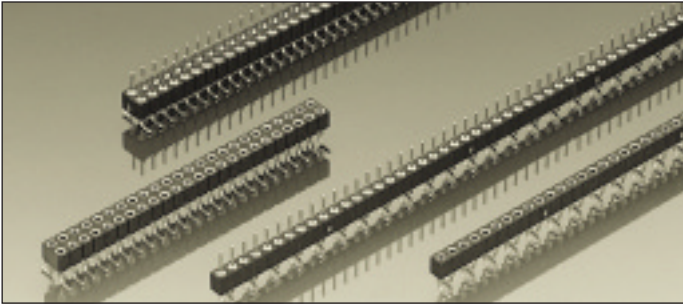PCB connectors 2.0 mm
Single row / double row
Surface mount



"Hard metric" PCB receptacles and pin connectors, surface mount






Grid spacing 2.0×2.0 mm

Receptacles for pins

Ø 0.40–0.56 mm


Screw machined pins Ø 0.46–0.47 mm

For corresponding connectors see pages 18, 19 and 21

Platings	Sleeve 	Clip 	Pin 
10 90			0.25 µm Au 5 µm Sn Pb
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
99	5 µm Sn Pb	5 µm Sn Pb	

Ordering information

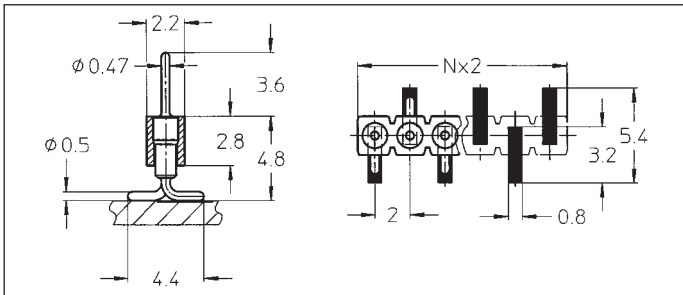
Replace **xxx** with the number of poles, e.g. 833-91-**xxx**-30-001 for a double row version with 8 pins per row becomes:
833-91-**016**-30-001



830-10-xxx-30-001
830-90-xxx-30-001

SMD pin connector: single row, perpendicular mount

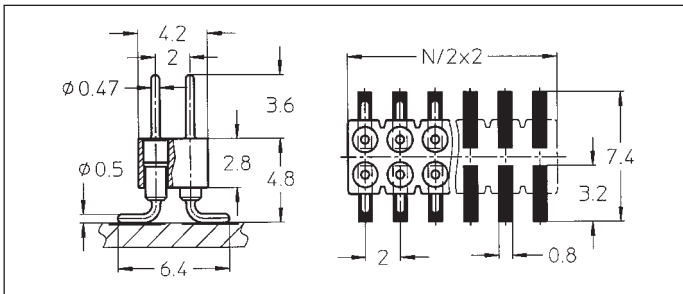
Availability from: 3 to 50 contacts
Standard number of contacts 50



832-10-xxx-30-001
832-90-xxx-30-001

SMD pin connector: double row, perpendicular mount

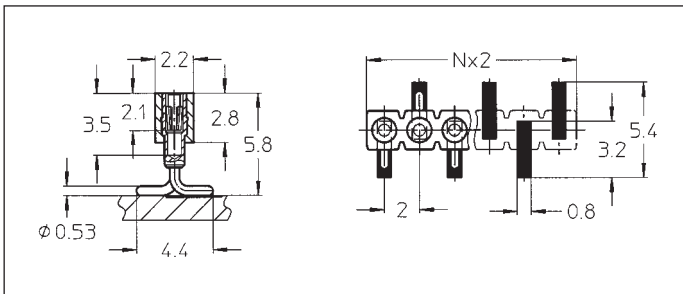
Availability from: 4 to 100 contacts
Standard number of contacts 100



831-91-xxx-30-001
831-93-xxx-30-001
831-99-xxx-30-001

SMD receptacle: single row, perpendicular mount

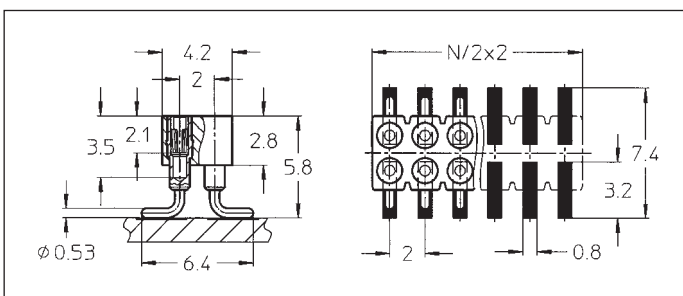Availability from: 3 to 50 contacts
Standard number of contacts 50




833-91-xxx-30-001
833-93-xxx-30-001
833-99-xxx-30-001

SMD receptacle: double row, perpendicular mount

Availability from: 4 to 100 contacts
Standard number of contacts 100


Series 830

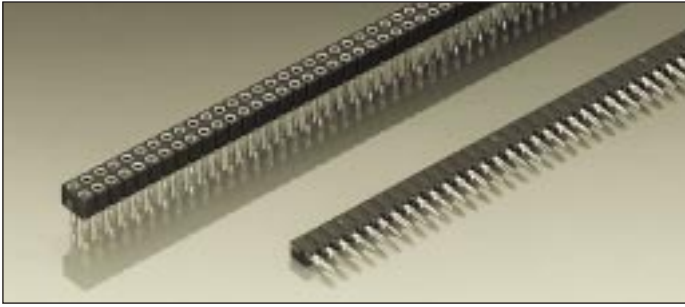PCB connectors 2.0 mm
Single row / double row
Press-fit






"Hard metric" PCB receptacles press-fit

Grid spacing 2.0×2.0 mm
Receptacle for pins
Ø 0.40–0.56 mm




For solderless mount into PCB with 1.5–2.4 mm thickness for plated thru-holes Ø 0.71±0.06 mm

For corresponding pin connectors see pages 19 and 20

Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
99	5 µm Sn Pb	5 µm Sn Pb	


Ordering information

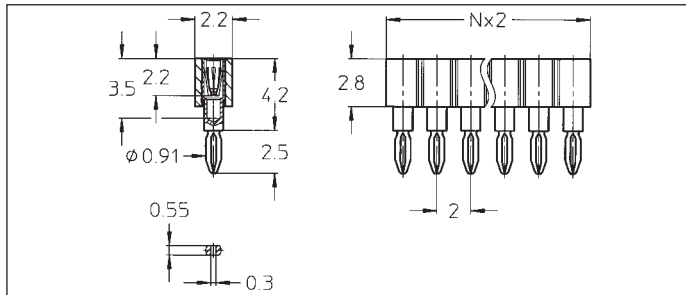Replace **xxx** with the number of poles, e.g. 833-93-**xxx**-64-001 for a double row version with 8 pins per row becomes:
833-93-**016**-64-001



831-91-xxx-64-001
831-93-xxx-64-001
831-99-xxx-64-001

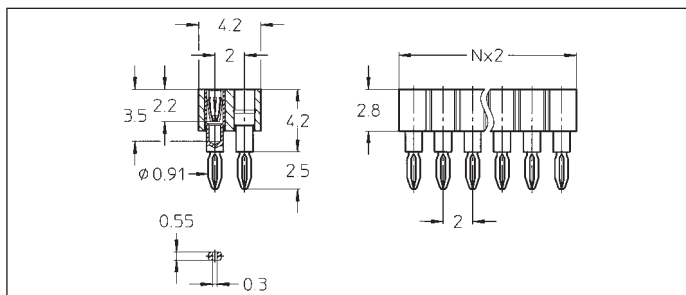Straight receptacle: press-fit,
single row
Availability from: 1 to 50 contacts
Standard number of contacts 50



833-91-xxx-64-001
833-93-xxx-64-001
833-99-xxx-64-001


Straight receptacle: press-fit,
double row
Availability from: 4 to 100
contacts
Standard number of contacts 100

Series 800

PCB connectors 2.54 mm


Single row / double row / triple row

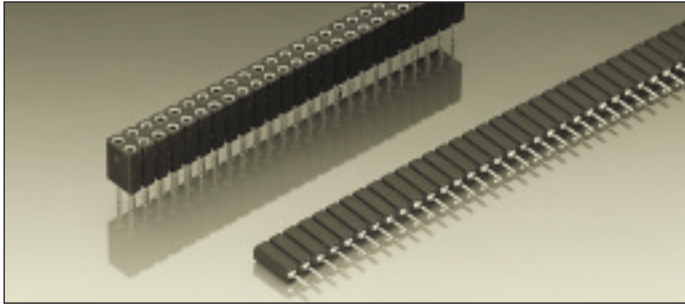Solder tail






Receptacles, solder tail

Accept square pins \square 0.635 mm
and round pins \varnothing 0.70–0.80 mm




For corresponding pin connectors see
pages 30 to 35

Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

Ordering information

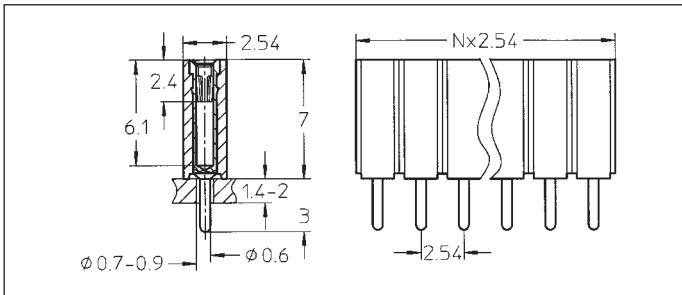Replace **xxx** with the number of poles, e.g. 803-91-**xxx**-10-001
for a double row version with 8 pins per row becomes:
803-91-**016**-10-001




801-91-xxx-10-001
801-93-xxx-10-001
801-99-xxx-10-001

Straight receptacle: solder tail,
single row

Availability from: 1 to 50 contacts
Standard number of contacts 24,
28, 29, 30, 36, 42, 48, 50

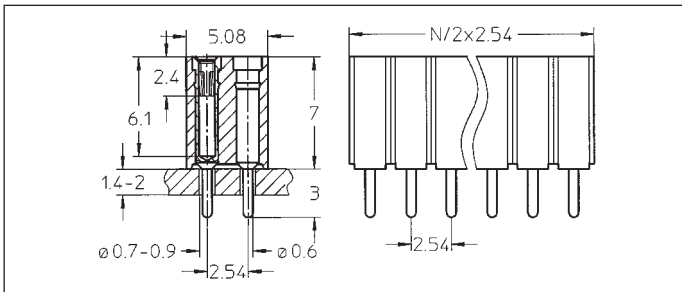
Option
On request with clinched
(right/left) solder tails



803-91-xxx-10-001
803-93-xxx-10-001
803-99-xxx-10-001

Straight receptacle: solder tail,
double row

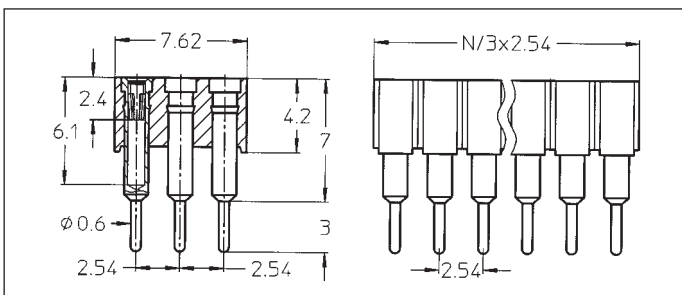Availability from: 4 to 100
contacts
Standard number of contacts 72
and 100



805-91-xxx-10-001
805-93-xxx-10-001
805-99-xxx-10-001

Straight receptacle: solder tail,
triple row


Availability from: 9 to 96 contacts
Standard number of contacts 96

Series 800

PCB connectors 2.54 mm


Single row / double row / triple row

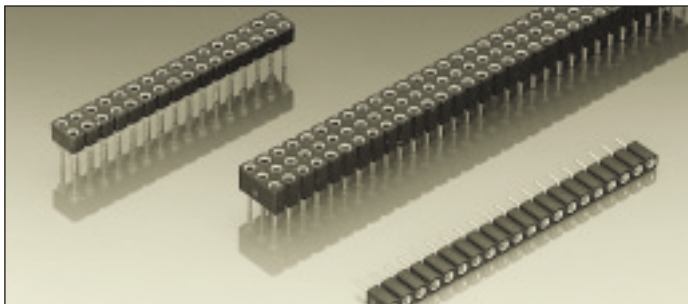Solder tail






Receptacles, solder tail

Accept square pins $\square 0.635$ mm
and round pins $\varnothing 0.70-0.80$ mm




For corresponding pin connectors see
pages 30 to 35

Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

Ordering information

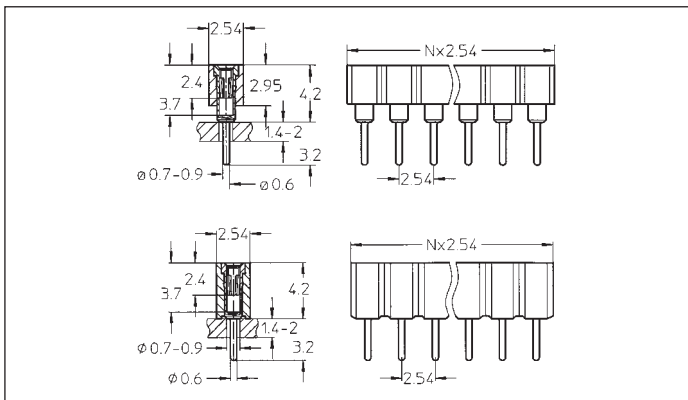Replace **xxx** with the number of poles, e.g. 803-91-**xxx**-10-012
for a double row version with 8 pins per row becomes:
803-91-**016**-10-012




801-91-xxx-10-002 **B**
801-93-xxx-10-002 **B**
801-99-xxx-10-002 **B**

Straight receptacle: solder tail,
single row, low profile
h = 4.2 mm

...-002: Availability from: 1 to 64
contacts
Standard number of contacts 64

801-91-xxx-10-012
801-93-xxx-10-012
801-99-xxx-10-012

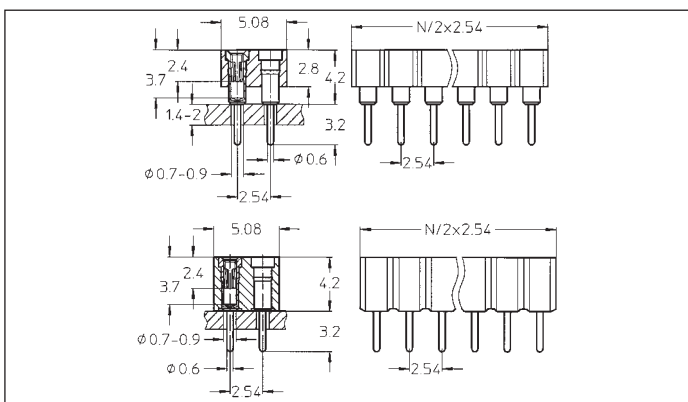...-012: Availability from: 1 to 32
contacts
Standard number of contacts 14,
20 and 32




803-91-xxx-10-002 **B**
803-93-xxx-10-002 **B**
803-99-xxx-10-002 **B**

Straight receptacle: solder tail,
double row, low profile
h = 4.2 mm

...-002: Availability from: 4 to 72
contacts
Standard number of contacts 40,
44, 56, 64 and 72

803-91-xxx-10-012
803-93-xxx-10-012
803-99-xxx-10-012

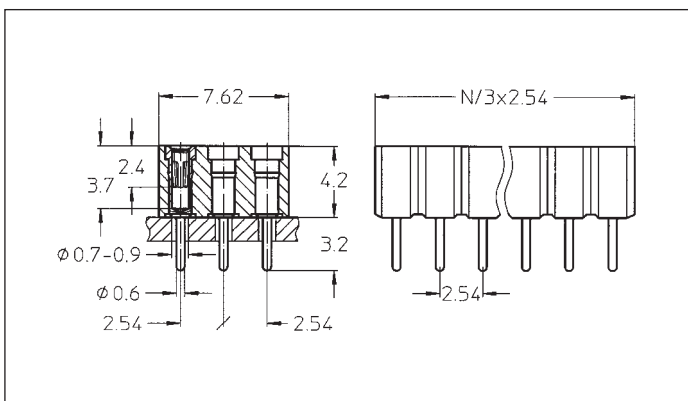...-012: Availability from: 4 to 64
contacts
Standard number of contacts 64



805-91-xxx-10-012
805-93-xxx-10-012
805-99-xxx-10-012

Straight receptacle: solder tail,
triple row, low profile
h = 4.2 mm


Availability from: 9 to 96 contacts
Standard number of contacts 96

Series 800

PCB connectors 2.54 mm


Single row / double row

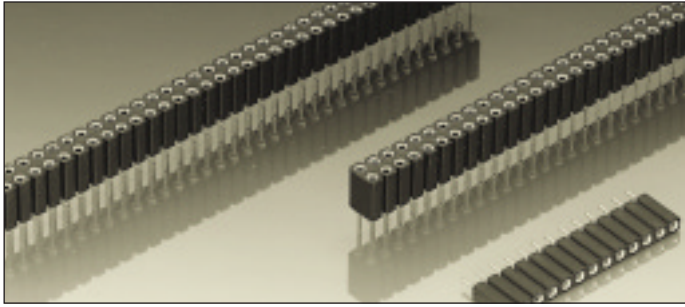Solder tail



Receptacles, solder tail

Accept square pins \square 0.635 mm
and round pins \varnothing 0.70–0.80 mm






For corresponding pin connectors see pages 30 to 35


Ordering information

Replace **xxx** with the number of poles, e.g. 803-91-**xxx**-10-003
for a double row version with 8 pins per row becomes:
803-91-**016**-10-003

Option:


Triple row on request

Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

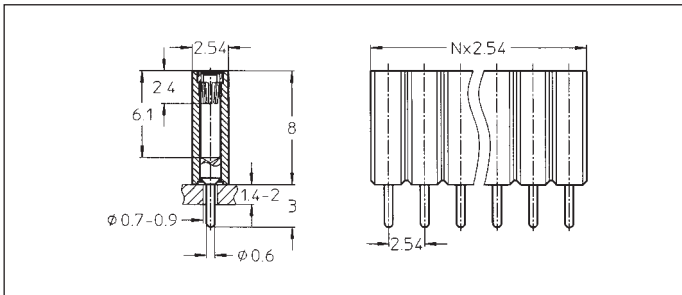


801-91-xxx-10-003
801-93-xxx-10-003
801-99-xxx-10-003

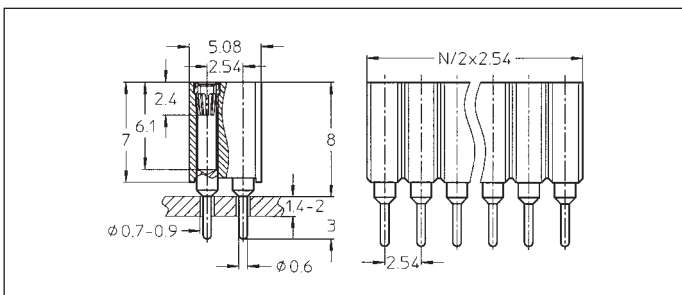Straight receptacle height 8 mm:
solder tail, single row
Availability from: 1 to 36 contacts
Standard number of contacts 36




803-91-xxx-10-003
803-93-xxx-10-003
803-99-xxx-10-003

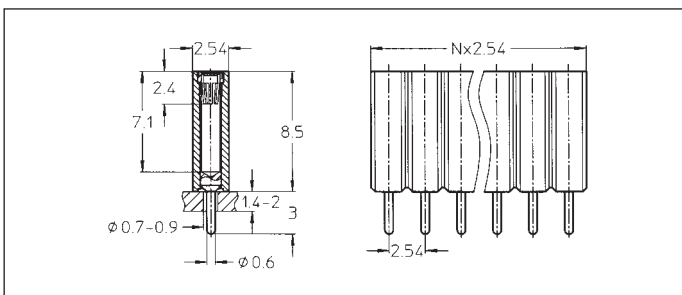Straight receptacle height 8 mm:
solder tail, double row
Availability from: 4 to 100
contacts
Standard number of contacts 72
and 100



801-91-xxx-10-005
801-93-xxx-10-005
801-99-xxx-10-005

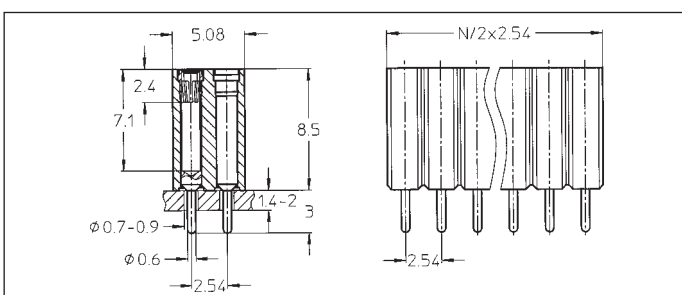Straight receptacle height
8.5 mm: solder tail, single row
Availability from: 1 to 36 contacts
Standard number of contacts 36



803-91-xxx-10-005
803-93-xxx-10-005
803-99-xxx-10-005


Straight receptacle height
8.5 mm: solder tail, double row
Availability from: 4 to 100
contacts
Standard number of contacts 100

Series 800


PCB connectors 2.54 mm

Single row / double row

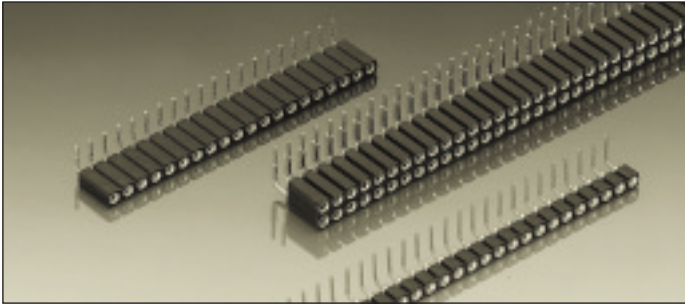Solder tail






Right angle receptacles, solder tail



Receptacles accept square pins \square 0.635 mm and round pins \varnothing 0.70–0.80 mm

For corresponding receptacle connectors see pages 30 to 35


Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

Ordering information

Replace **xxx** with the number of poles, e.g. 803-91-**xxx**-20-001 for a double row version with 8 pins per row becomes:
803-91-**016**-20-001

Option:

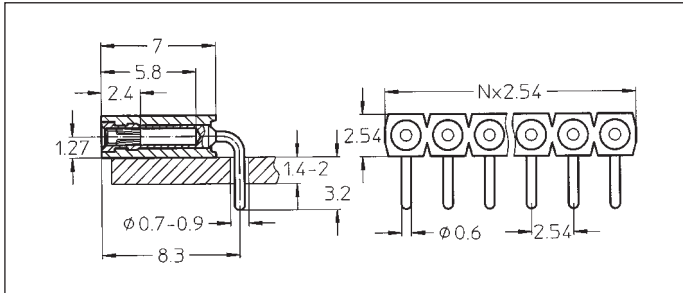
Triple row right angle receptacles on request



801-91-xxx-20-001
801-93-xxx-20-001
801-99-xxx-20-001

Right angle receptacle: solder tail, single row

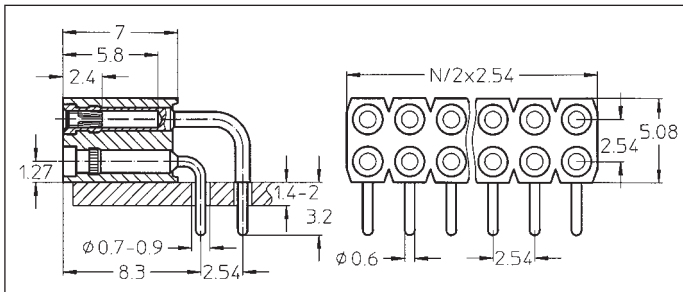
Availability from: 1 to 50 contacts
Standard number of contacts 24, 28, 29, 30, 36, 42, 48, 50



803-91-xxx-20-001
803-93-xxx-20-001
803-99-xxx-20-001

Right angle receptacle: solder tail, double row

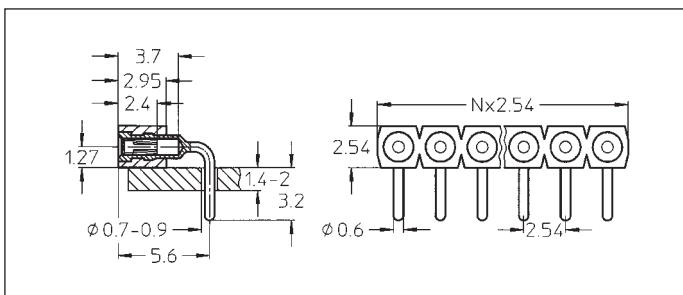Availability from: 4 to 100 contacts
Standard number of contacts 72 and 100



801-91-xxx-20-002
801-93-xxx-20-002
801-99-xxx-20-002

Right angle short receptacle: solder tail, single row

Availability from: 1 to 64 contacts
Standard number of contacts: 64


Right angle short receptacle: solder tail, double row available on request
Please consult

Series 800

PCB connectors 2.54 mm


Single row / double row

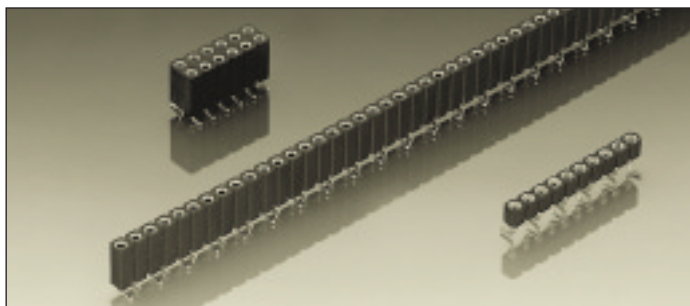Surface mount



Receptacles, surface mount




Accept square pins \square 0.635 mm and round pins \varnothing 0.70–0.80 mm




For corresponding pin connectors see pages 30 to 35

Ordering information

Replace **xxx** with the number of poles, e.g. 803-91-**xxx**-30-001 for a double row version with 8 pins per row becomes: 803-91-**016**-30-001

Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

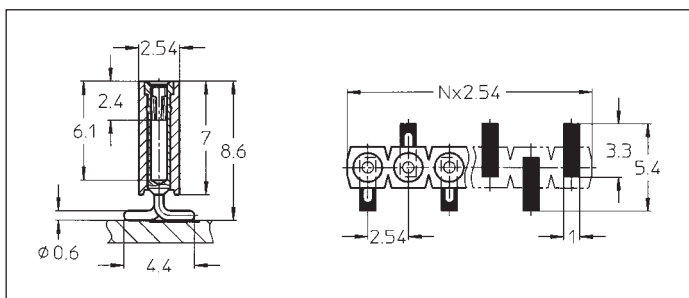


801-91-xxx-30-001

801-93-xxx-30-001

801-99-xxx-30-001

SMD receptacle: single row perpendicular mount

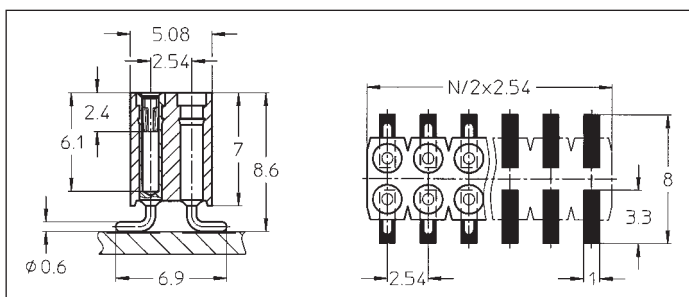Availability from: 3 to 50 contacts
Standard number of contacts 24, 28, 29, 30, 36, 42, 48 and 50




803-91-xxx-30-001

803-93-xxx-30-001

803-99-xxx-30-001

SMD receptacle: double row perpendicular mount

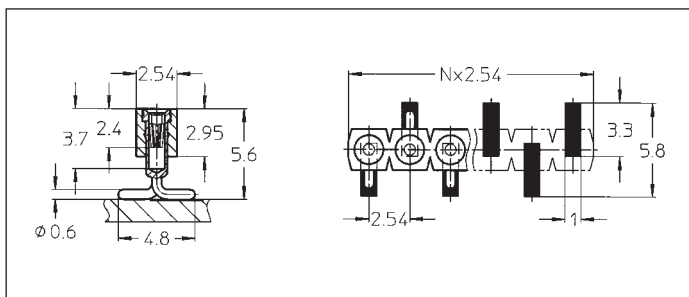Availability from: 4 to 100 contacts
Standard number of contacts 72 and 100




801-91-xxx-30-002

801-93-xxx-30-002

801-99-xxx-30-002

SMD receptacle: single row, low profile, perpendicular mount

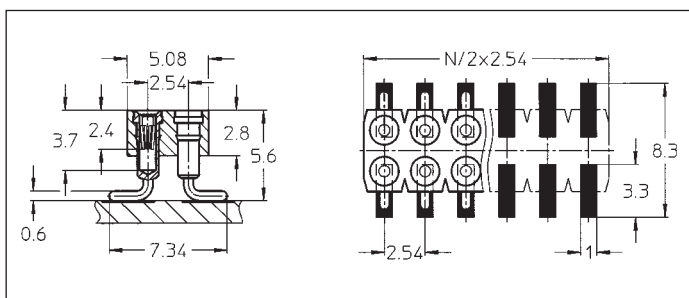Availability from: 3 to 32 contacts
Standard number of contacts 32



803-91-xxx-30-002

803-93-xxx-30-002

803-99-xxx-30-002


SMD receptacle: double row, low profile, perpendicular mount

Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64 and 72

Series 800

PCB connectors 2.54 mm

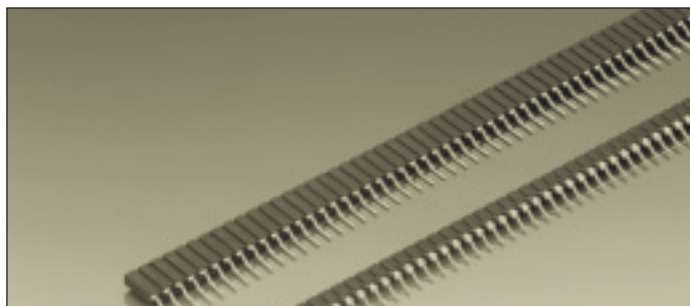Single row / double row / surface mount






Receptacles, surface mount




Accept square pins \square 0.635 mm
and round pins \varnothing 0.70–0.80 mm

For corresponding pin connectors see
pages 30 to 35

Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

Ordering information

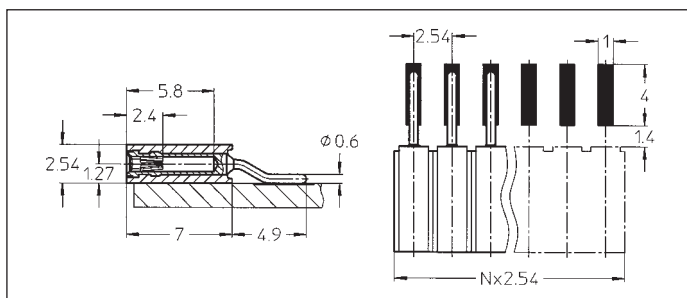Replace **xxx** with the number of poles, e.g. 803-91-**xxx**-40-001
for a double row version with 8 pins per row becomes:
803-91-**016**-40-001




801-91-xxx-40-001

801-93-xxx-40-001

801-99-xxx-40-001

SMD receptacle: single row
parallel mount

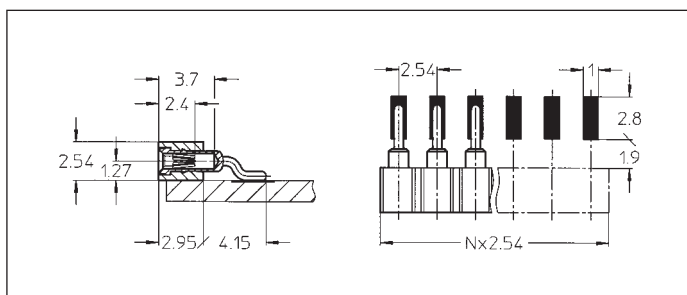Availability from: 1 to 50 contacts
Standard number of contacts 24,
28, 29, 30, 36, 42, 48 and 50



801-91-xxx-40-002

801-93-xxx-40-002

801-99-xxx-40-002

SMD receptacle: single row, low
profile, parallel mount


Availability from: 1 to 32 contacts
Standard number of contacts 32

Series 800

PCB connectors 2.54 mm

Single row / double row

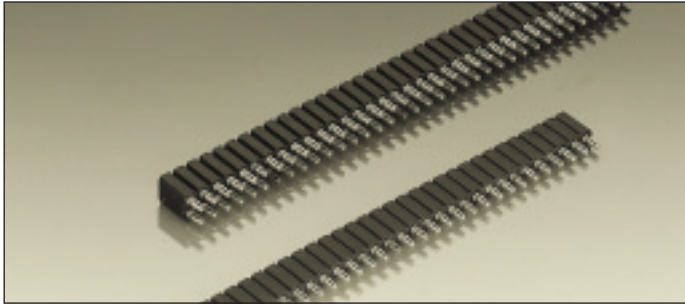Press-fit



Receptacles connectors, press-fit


Receptacles accept square pins

□ 0.635 mm, and round pins Ø 0.70–0.80 mm

With compliant pin for solderless mount into PCB
plated-thru holes Ø 1 mm + 0.09/–0.06 mm

For corresponding connectors see pages 30 to 35




New version with modified eye of the needle pin




Ordering information

Replace **xxx** with the number of poles, e.g. 803-93-**xxx**-65-001
for a double row version with 8 pins per row becomes:
803-93-**016**-65-001

(Older versions 801/803-...-61/62/63-001 please consult)

Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
99	5 µm Sn Pb	5 µm Sn Pb	

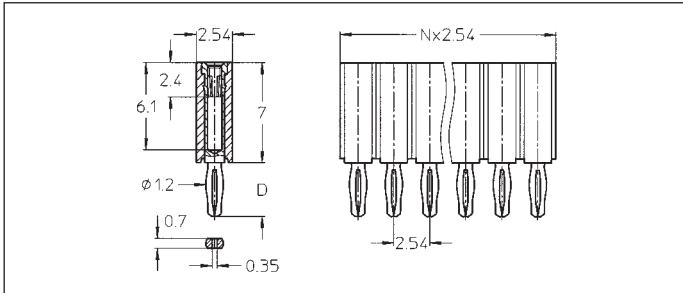


for PCB thickness 1.5 to
2.0 mm D = 2.80 mm
801-91-xxx-65-001
801-93-xxx-65-001
801-99-xxx-65-001

for PCB thickness 2.1 to
3.2 mm D = 3.80 mm
801-91-xxx-66-001
801-93-xxx-66-001
801-99-xxx-66-001

Press-fit receptacle: single row

Availability from: 1 to 50 contacts
Standard number of contacts 24,
28, 29, 30, 36, 42, 48, 50

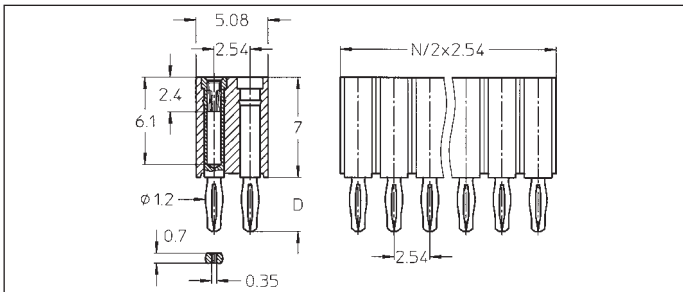New version with modified eye of
the needle pin



for PCB thickness 1.5 to
2.0 mm D = 2.80 mm
803-91-xxx-65-001
803-93-xxx-65-001
803-99-xxx-65-001

for PCB thickness 2.1 to
3.2 mm D = 3.80 mm
803-91-xxx-66-001
803-93-xxx-66-001
803-99-xxx-66-001

Press-fit receptacle: double row

Availability from: 4 to 100
contacts
Standard number of contacts 72
and 100


New version with modified eye of
the needle pin

Series 800

PCB connectors 2.54 mm

Single row / double row

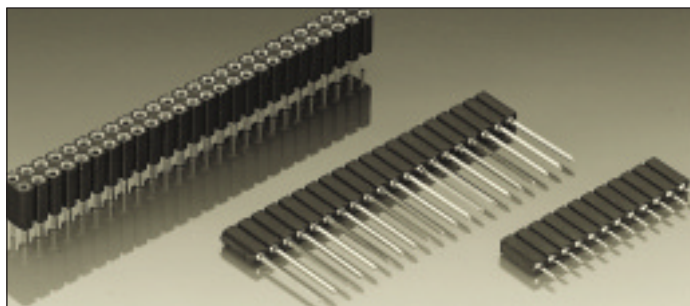
Wire-wrap / solder tail



PCB receptacles with wire-wrap posts

Accept square pins \square 0.635 mm
and round pins \varnothing 0.70–0.80 mm




For corresponding pin connectors see pages
30 to 35



Receptacles, solder tail


for pins \varnothing 0.95–1.05 mm



Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

Ordering information

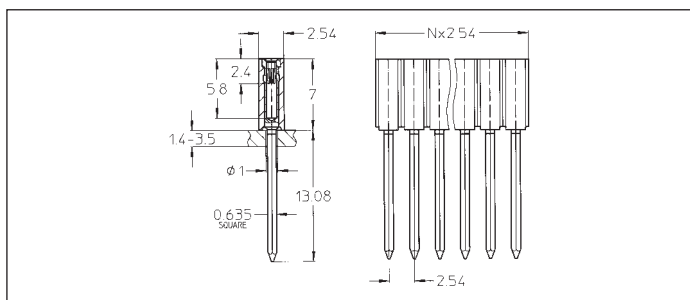
Replace **xxx** with the number of poles, e.g. 803-91-**xxx**-10-004
for a double row version with 8 pins per row becomes:
803-91-**016**-10-004



801-91-xxx-53-001 **B**
801-93-xxx-53-001

Wire-wrap receptacle: single row,
3 levels

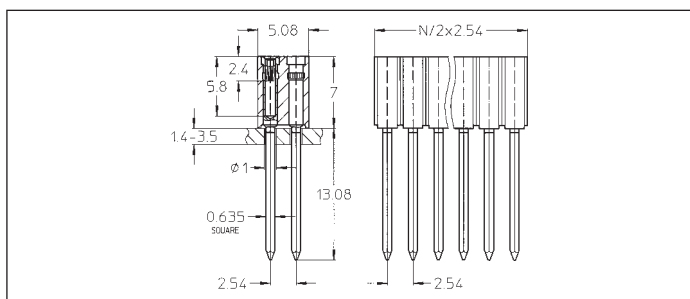
Availability from: 1 to 50 contacts
Standard number of contacts 24,
28, 29, 30, 36, 42, 48, 50



803-91-xxx-53-001 **B**
803-93-xxx-53-001

Wire-wrap receptacle: double
row, 3 levels

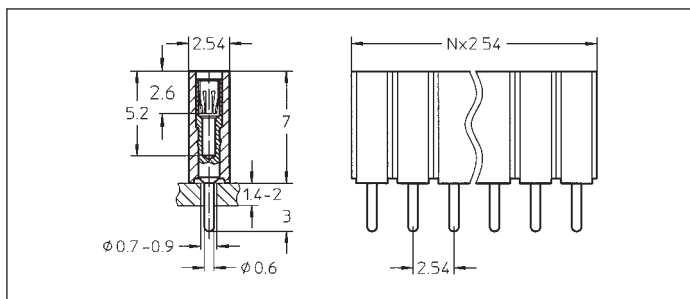
Availability from: 4 to 100
contacts
Standard number of contacts 72
and 100



801-91-xxx-10-004
801-93-xxx-10-004
801-99-xxx-10-004

Straight receptacle: single row,
accepts pin
 \varnothing 0.95–1.05 mm

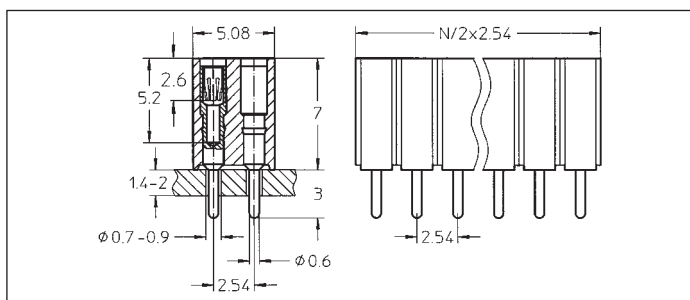Availability from: 1 to 50 contacts
Standard number of contacts 24,
28, 29, 30, 36, 42, 48, 50



803-91-xxx-10-004
803-93-xxx-10-004
803-99-xxx-10-004

Straight receptacle: double row,
accepts pin
 \varnothing 0.95–1.05 mm


Availability from: 4 to 100
contacts
Standard number of contacts 72
and 100

Series 800

PCB connectors 2.54 mm

Single row / double row

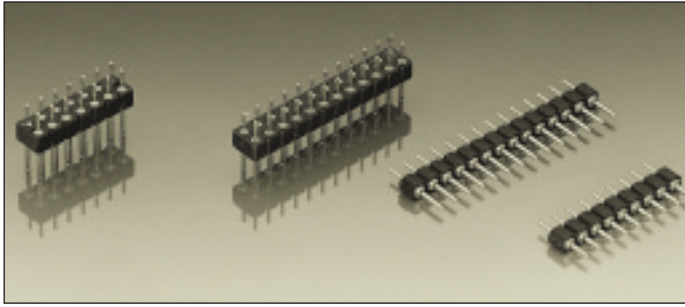Solder tail



Pin connectors, solder tail

Screw-machined pins \varnothing 0.76 mm




For corresponding receptacles see pages 22 to 29



New:


Pin connectors with selective plated precision screw machined pin, plating code Z1.

Connecting side 1: gold plated
soldering/PCB side 2: tin plated

Platings	Sleeve 	Clip 	Pin 
10 90 Z1			0.25 μ m Au 5 μ m Sn Pb 1: 0.25 μ m Au 2: 5 μ m Sn Pb

Ordering information

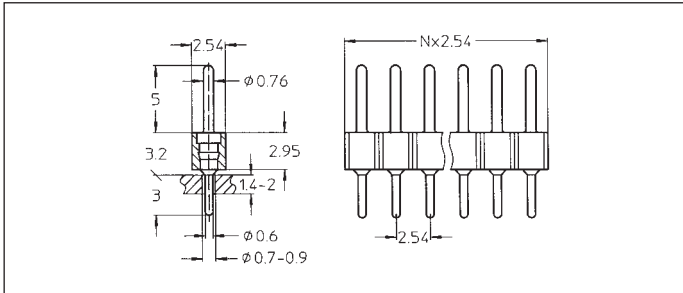Replace **xx** with the number of poles, e.g. 802-10-**0xx**-10-001
for a double row version with 8 pins per row becomes:
802-10-**016**-10-001




800-10-0xx-10-001
800-90-0xx-10-001
800-Z1-0xx-10-001

Straight pin connector: solder tail, single row

Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

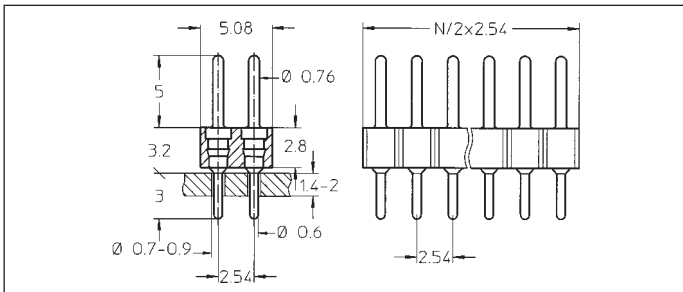
Option
On request with clinched (right/left) solder tails



802-10-0xx-10-001
802-90-0xx-10-001
802-Z1-0xx-10-001

Straight pin connector: solder tail, double row

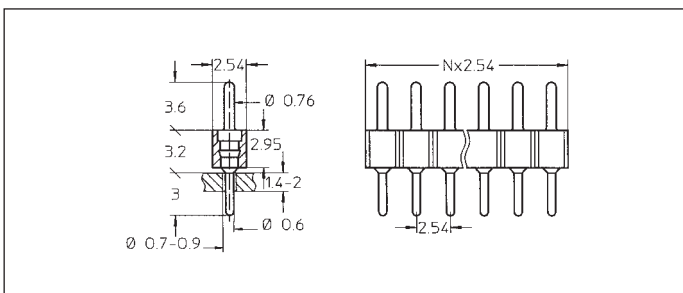Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72




800-10-0xx-10-002
800-90-0xx-10-002
800-Z1-0xx-10-002

Straight pin connector: solder tail, single row, short pin

Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

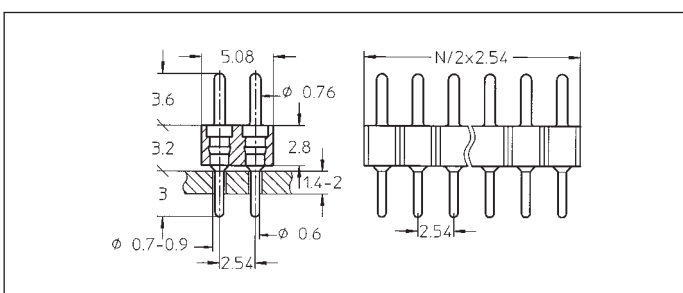Option
On request with clinched (right/left) solder tails



802-10-0xx-10-002
802-90-0xx-10-002
802-Z1-0xx-10-002

Straight pin connector: solder tail, double row, short pin


Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72

Series 800

PCB connectors 2.54 mm


Single row / double row

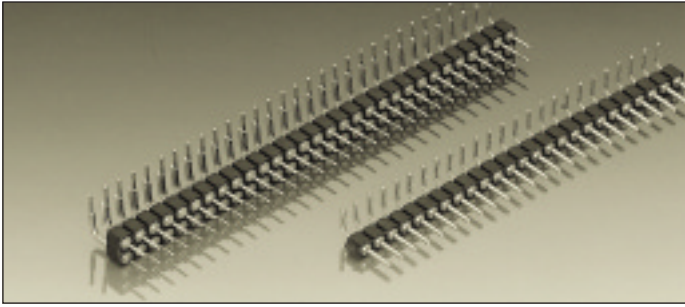Solder tail



Right angle pin connectors, solder tail

Screw-machined pins \varnothing 0.76 mm






For corresponding receptacles see pages 22 to 29

New:

Pin connectors with selective plated precision screw machined pin, plating code Z1.

Connecting side 1: gold plated
soldering/PCB side 2: tin plated

Platings	Sleeve 	Clip 	Pin 
10 90 Z1			0.25 μ m Au 5 μ m Sn Pb 1: 0.25 μ m Au 2: 5 μ m Sn Pb

Ordering information

Replace **xx** with the number of poles, e.g. 802-10-**0xx**-20-001
for a double row version with 8 pins per row becomes:
802-10-**016**-20-001

800-10-0xx-20-001
800-90-0xx-20-001
800-Z1-0xx-20-001

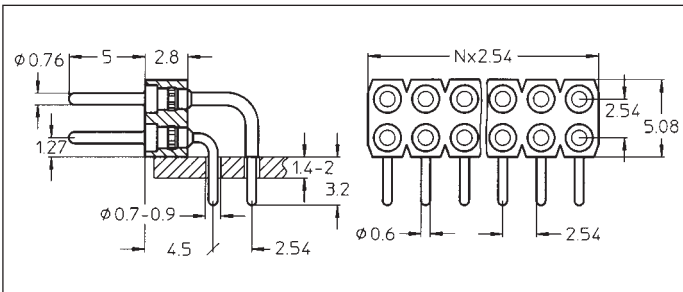
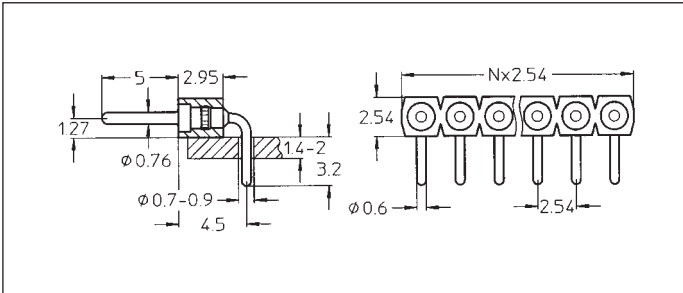
Right angle pin connector: solder tail, single row

Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

802-10-0xx-20-001
802-90-0xx-20-001
802-Z1-0xx-20-001

Right angle pin connector: solder tail, double row

Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72




Series 800

PCB connectors 2.54 mm

Single row / double row

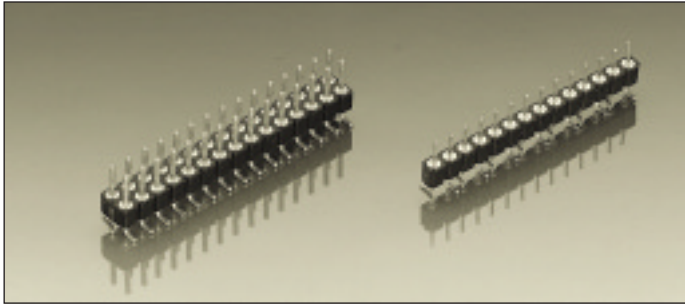
Surface mount



Pin connectors, surface mount

Screw-machined pins $\varnothing 0.76$ mm




For corresponding receptacles see pages 22 to 29



New:


Pin connectors with selective plated precision screw machined pin, plating code Z1.

Connecting side 1: gold plated
soldering/PCB side 2: tin plated

Platings	Sleeve 	Clip 	Pin 
10 90 Z1			0.25 μ m Au 5 μ m Sn Pb 1: 0.25 μ m Au 2: 5 μ m Sn Pb

Ordering information

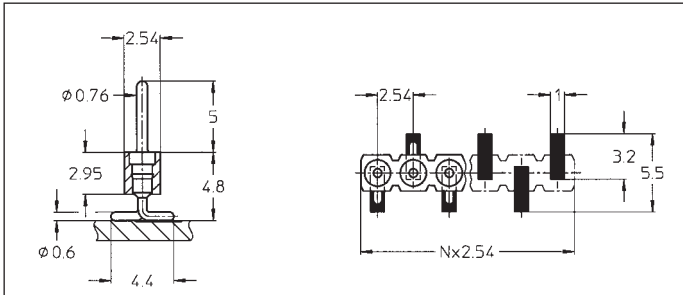
Replace **xx** with the number of poles, e.g. 802-10-**0xx**-30-001
for a double row version with 8 pins per row becomes:
802-10-**016**-30-001



800-10-0xx-30-001
800-90-0xx-30-001
800-Z1-0xx-30-001

SMD pin connector: single row,
perpendicular mount

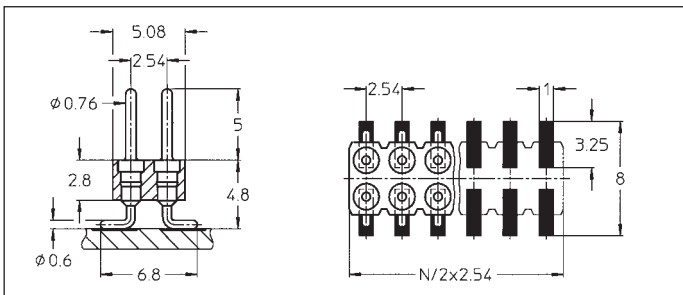
Availability from: 3 to 64 contacts
Standard number of contacts 5,
6, 8, 10, 14, 16, 20, 21, 25, 30,
32, 48, 56, 60, 64



802-10-0xx-30-001
802-90-0xx-30-001
802-Z1-0xx-30-001

SMD pin connector: double row,
perpendicular mount

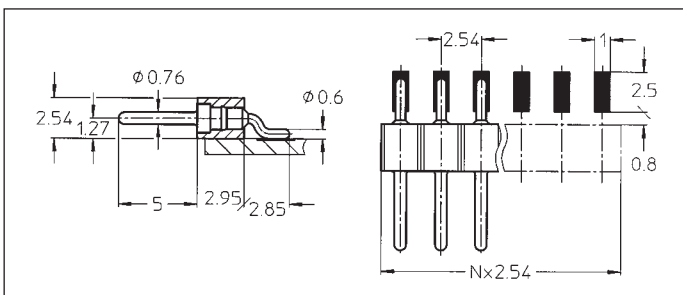Availability from: 4 to 72 contacts
Standard number of contacts 40,
44, 56, 64, 72



800-10-0xx-40-001
800-90-0xx-40-001
800-Z1-0xx-40-001

SMD pin connector: single row,
parallel mount


Availability from: 2 to 64 contacts
Standard number of contacts 5,
6, 8, 10, 14, 16, 20, 21, 25, 30,
32, 48, 56, 60, 64

Series 800

PCB connectors 2.54 mm


Single row / double row

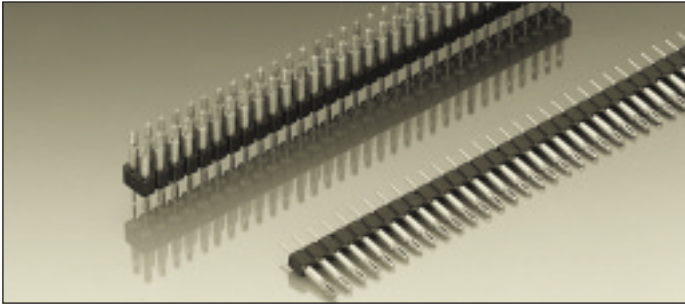Press-fit



Pin connectors, press-fit

Pin connectors with screw-machined pin $\varnothing 0.76 \text{ mm}$



With compliant pin for solderless mount into PCB plated-thru holes $\varnothing 1 \text{ mm} + 0.09/-0.06 \text{ mm}$




For corresponding connectors see pages 22 to 29


New version with modified eye of the needle pin

Ordering information

Replace **xxx** with the number of poles, e.g. 802-10-**xxx**-65-001 for a double row version with 8 pins per row becomes: 802-10-**016**-65-001

(Older versions 800/802-...-61/62-001 please consult)

Platings	Sleeve 	Clip 	Pin 
10 90			0.25 μm Au 5 μm Sn Pb

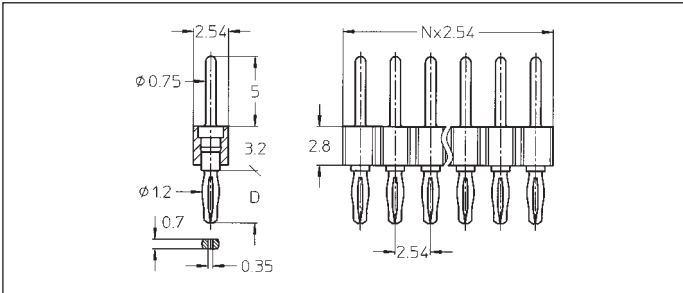

for PCB thickness 1.5 to 2.0 mm $D = 2.80 \text{ mm}$

800-10-xxx-65-001

800-90-xxx-65-001

for PCB thickness 2.1 to 3.2 mm $D = 3.80 \text{ mm}$

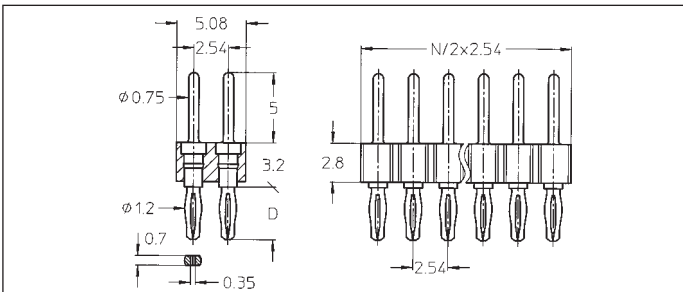
800-10-xxx-66-001

800-90-xxx-66-001

Press-fit pin connector: single row

Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

New version with modified eye of the needle pin



for PCB thickness 1.5 to 2.0 mm $D = 2.80 \text{ mm}$

802-10-xxx-65-001

802-90-xxx-65-001

for PCB thickness 2.1 to 3.2 mm $D = 3.80 \text{ mm}$

802-10-xxx-66-001

802-90-xxx-66-001

Press-fit pin connector: double row

Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72

New version with modified eye of the needle pin

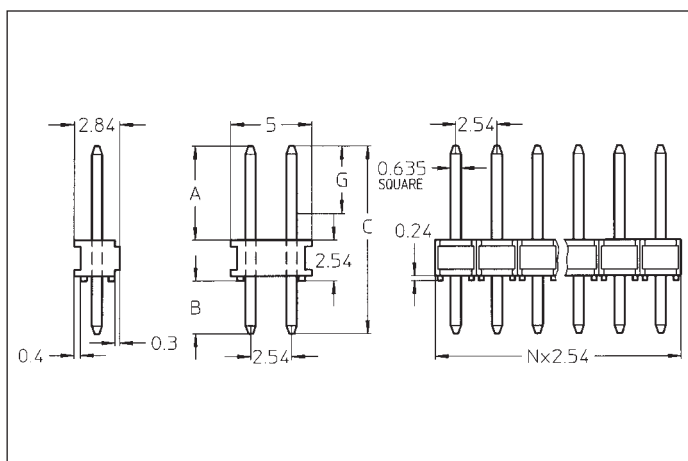
Series 890 / 892

PCB connectors 2.54 mm

Single row / double row

Solder tail

34







Series 890 / 892 square pin headers are cost efficient thanks to selective gold plating on pins made of copper alloy

They come with various pin lengths to suit many different applications

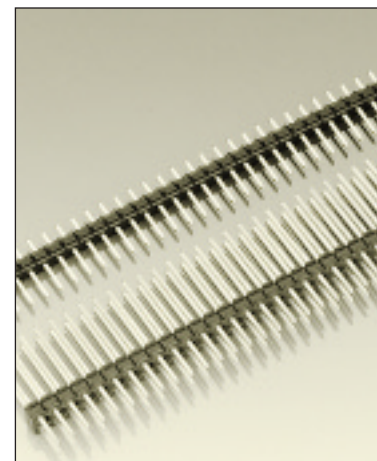When used with series 999 female jumpers, these connectors may serve as a practical, simple means for coding purposes

For corresponding receptacles see pages 22 to 29



Platings	Sleeve 	Clip 	Pin 
19 39 90			0.25 μm Au/Sn Pb* 0.75 μm Au/Sn Pb* Sn Pb * selective

Ordering information

Replace **xxx** with required number of poles, e.g.
892-39-xxx-10-802 for a double row version with 12 pins per row becomes: 892-39-**024**-10-802

Availability:

single row: 1 to 36 contacts, standard 36 contacts
double row: 4 to 72 contacts, standard 72 contacts


Order Codes			Dimensions			
Plating 19	Plating 39 B	Plating 90	Solder side $B \pm 0.2$	Connector side $A \pm 0.2$	Total length $C \pm 0.1$	Min. length of gold plating G
Single row						
890-19-xxx-10-802	890-39-xxx-10-802	890-90-xxx-10-802	2.56	5.7	10.8	4.5
890-19-xxx-10-809	890-39-xxx-10-809	890-90-xxx-10-809	2.46	8.5	13.5	7.3
890-19-xxx-10-803	890-39-xxx-10-803	890-90-xxx-10-803	2.96	5.8	11.3	4.6
890-19-xxx-10-000	890-39-xxx-10-000	890-90-xxx-10-000	2.96	7.0	12.5	5.8
890-19-xxx-10-800	890-39-xxx-10-800	890-90-xxx-10-800	3.26	6.7	12.5	5.5
890-19-xxx-10-804	890-39-xxx-10-804	890-90-xxx-10-804	3.46	5.8	11.8	4.6
890-19-xxx-10-811	890-39-xxx-10-811	890-90-xxx-10-811	3.06	15.4	21.0	14.2
890-19-xxx-10-805	890-39-xxx-10-805	890-90-xxx-10-805	4.96	6.0	13.5	4.8
890-19-xxx-10-807	890-39-xxx-10-807	890-90-xxx-10-807	10.06	5.7	18.3	4.5
890-19-xxx-10-808	890-39-xxx-10-808	890-90-xxx-10-808	12.76	5.7	21.0	4.5
Double row						
892-19-xxx-10-802	892-39-xxx-10-802	892-90-xxx-10-802	2.56	5.7	10.8	4.5
892-19-xxx-10-809	892-39-xxx-10-809	892-90-xxx-10-809	2.46	8.5	13.5	7.3
892-19-xxx-10-803	892-39-xxx-10-803	892-90-xxx-10-803	2.96	5.8	11.3	4.6
892-19-xxx-10-000	892-39-xxx-10-000	892-90-xxx-10-000	2.96	7.0	12.5	5.8
892-19-xxx-10-800	892-39-xxx-10-800	892-90-xxx-10-800	3.26	6.7	12.5	5.5
892-19-xxx-10-804	892-39-xxx-10-804	892-90-xxx-10-804	3.46	5.8	11.8	4.6
892-19-xxx-10-811	892-39-xxx-10-811	892-90-xxx-10-811	3.06	15.4	21.0	14.2
892-19-xxx-10-805	892-39-xxx-10-805	892-90-xxx-10-805	4.96	6.0	13.5	4.8
892-19-xxx-10-807	892-39-xxx-10-807	892-90-xxx-10-807	10.06	5.7	18.3	4.5
892-19-xxx-10-808	892-39-xxx-10-808	892-90-xxx-10-808	12.76	5.7	21.0	4.5

B Products not available from stock. Please consult PRECI-DIP.

Series 890 / 892

PCB connectors 2.54 mm
Single row / double row
Solder tail

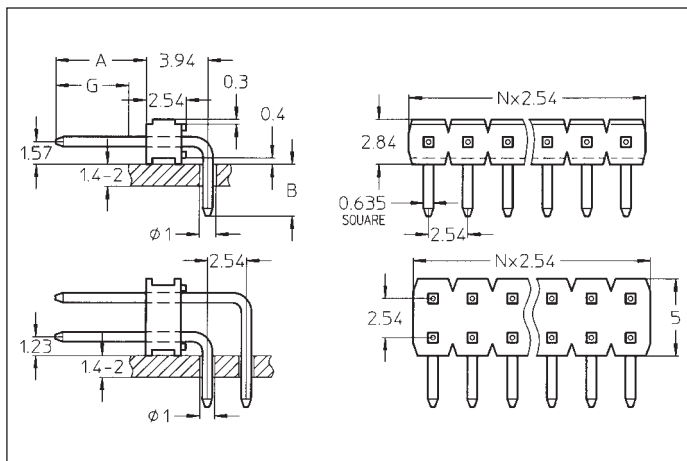35







Series 890/892 square pin headers are cost efficient thanks to selective gold plating on pins made of copper alloy

They come with various pin lengths to suit many different applications

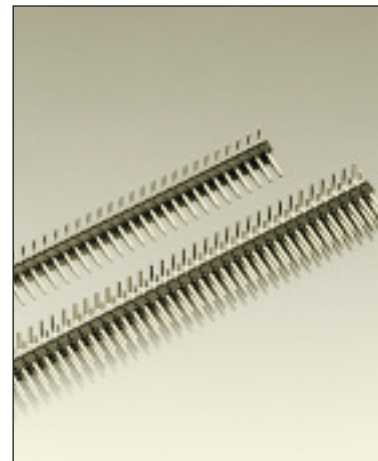When used with series 999 female jumpers, these connectors may serve as a practical, simple means for coding purposes

For corresponding receptacles see pages 22 to 29



Platings	Sleeve 	Clip 	Pin 
19 39 90			0.25 μm Au/Sn Pb* 0.75 μm Au/Sn Pb* Sn Pb * selective

Ordering information

Replace **xxx** with required number of poles, e.g.
892-39-xxx-20-902 for a double row version with 12 pins per row becomes: 892-39-**024**-20-902

Availability:

single row: 1 to 36 contacts, standard 36 contacts
double row: 4 to 72 contacts, standard 72 contacts

Order Codes			Dimensions			
Plating 19	Plating 39 B	Plating 90		Solder side $B \pm 0.2$	Connector side $A \pm 0.2$	Min. length of gold plating G
Single row						
890-19-xxx-20-902	890-39-xxx-20-902	890-90-xxx-20-902		2.5	5.7	4.5
890-19-xxx-20-000	890-39-xxx-20-000	890-90-xxx-20-000		2.9	7.0	5.8
890-19-xxx-20-901	890-39-xxx-20-901	890-90-xxx-20-901		3.2	6.7	5.5
890-19-xxx-20-903	890-39-xxx-20-903	890-90-xxx-20-903		3.4	5.8	4.6
890-19-xxx-20-904	890-39-xxx-20-904	890-90-xxx-20-904		5.1	5.7	4.5
Double row						
892-19-xxx-20-902	892-39-xxx-20-902	892-90-xxx-20-902		2.5	5.7	4.5
892-19-xxx-20-000	892-39-xxx-20-000	892-90-xxx-20-000		2.9	7.0	5.8
892-19-xxx-20-901	892-39-xxx-20-901	892-90-xxx-20-901		3.2	6.7	5.5
892-19-xxx-20-903	892-39-xxx-20-903	892-90-xxx-20-903		3.4	5.8	4.6

For other pin and solder tail lengths, triple row headers, double body board spacer (Sandwich) headers and SMT or press-fit terminations please consult.

Series 310 / 410

PCB connectors 2.54 mm
Single row / double row
Solder tail



Receptacles, solder tail




Accept pins \varnothing 0.40–0.56 mm


For corresponding pin connectors see pages 43 to 46



Ordering information

Replace **xx** with the number of poles, e.g. 410-91-2**xx**-41-001 for a double row version with 8 pins per row becomes:
410-91-2**16**-41-001


Platings	Sleeve 	Clip 	Pin 
13	0.25 μ m Au	0.75 μ m Au	
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
97	5 μ m Sn Pb	Goldflash	
99	5 μ m Sn Pb	5 μ m Sn Pb	

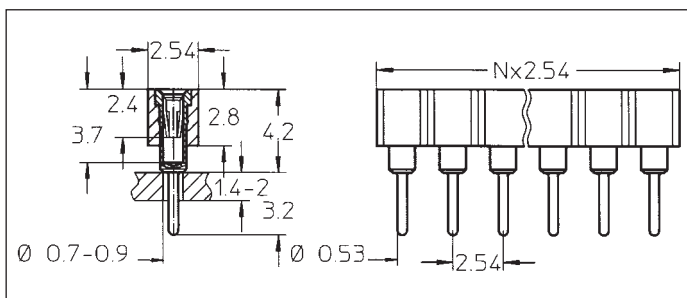

310-13-1xx-41-001 **B**
310-91-1xx-41-001
310-93-1xx-41-001
310-97-1xx-41-001
310-99-1xx-41-001

Straight receptacle: solder tail, single row

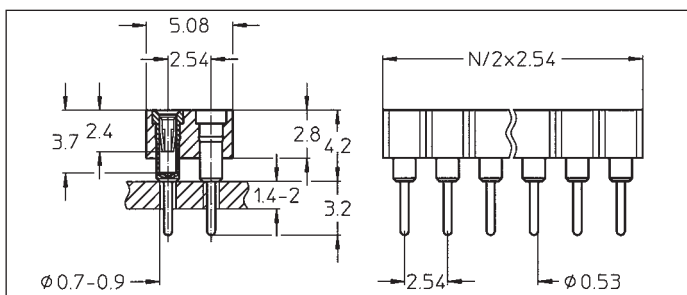
Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64



410-13-2xx-41-001 **B**
410-91-2xx-41-001
410-93-2xx-41-001
410-97-2xx-41-001
410-99-2xx-41-001

Straight receptacle: solder tail, double row

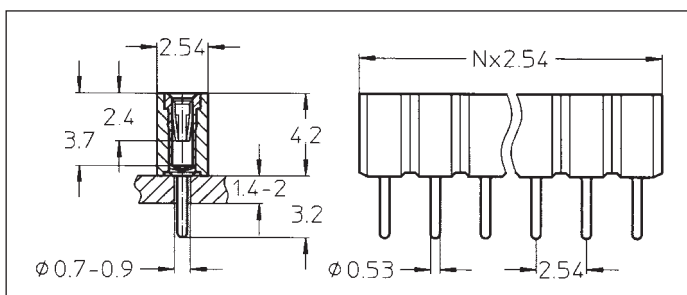Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72




310-91-1xx-01-640
310-93-1xx-01-640
310-97-1xx-01-640
310-99-1xx-01-640

Straight receptacle: solder tail, single row, with standoff

Availability from: 1 to 32 contacts
Standard number of contacts 14, 20, 32

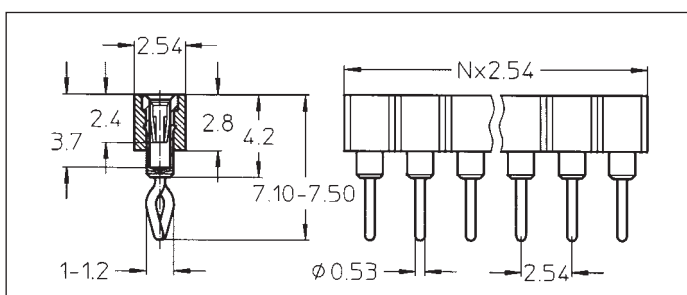Option
On request double and triple row



310-91-1xx-01-666
310-93-1xx-01-666
310-97-1xx-01-666
310-99-1xx-01-666

Straight receptacle: with clinched (right/left) solder tails, single row

Availability from: 3 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64



Receptacles, solder tail




Accept pins \varnothing 0.40–0.56 mm




For corresponding pin connectors see pages 43 to 46

Ordering information

Replace **xx** with the number of poles, e.g. 411-91-2**xx**-41-001 for a double row version with 8 pins per row becomes:
411-91-2**16**-41-001


Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
97	5 μ m Sn Pb	Goldflash	
99	5 μ m Sn Pb	5 μ m Sn Pb	

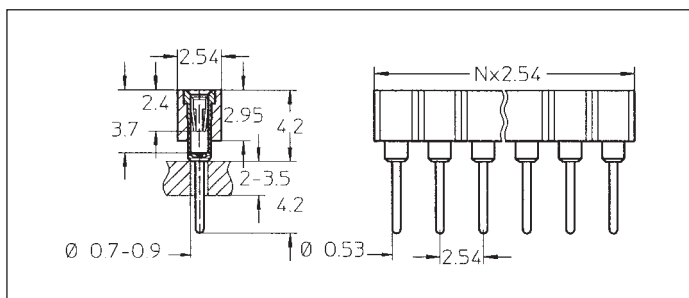

311-91-1xx-41-001	B
311-93-1xx-41-001	B
311-99-1xx-41-001	B

Straight receptacle: solder tail, long, single row

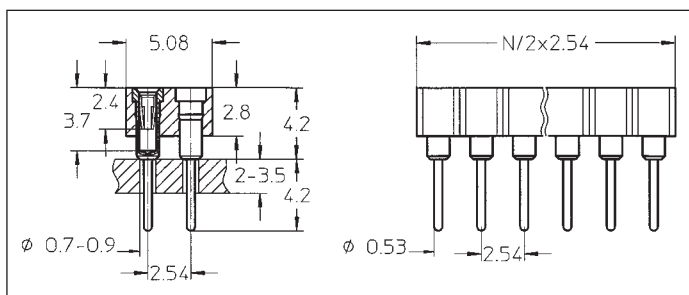
Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64



411-91-2xx-41-001	B
411-93-2xx-41-001	B
411-99-2xx-41-001	B

Straight receptacle: solder tail, long, double row

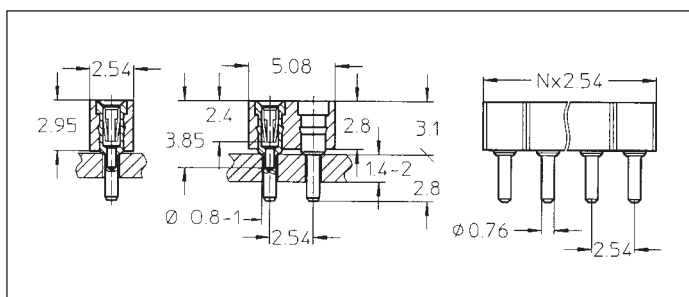Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72




Very low profile:	
315-91-1xx-41-001	
315-93-1xx-41-001	
315-99-1xx-41-001	
415-91-2xx-41-001	
415-93-2xx-41-001	
415-99-2xx-41-001	

Straight receptacle: solder tail, single row, low profile

Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

Straight receptacle: solder tail, double row, low profile

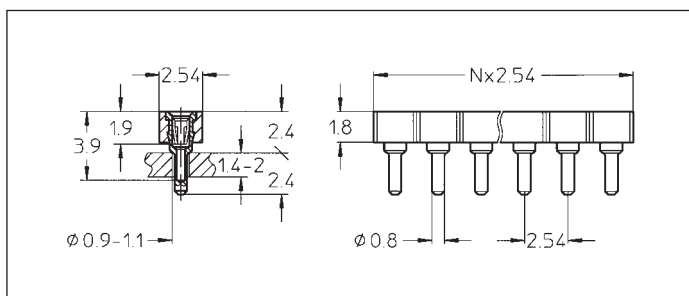Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72



Ultra low profile:	
315-91-1xx-41-003	
315-93-1xx-41-003	
315-97-1xx-41-003	
315-99-1xx-41-003	

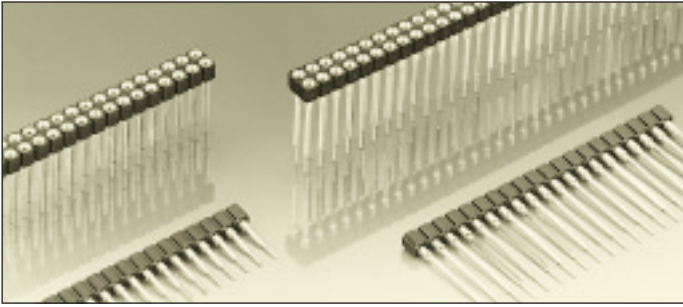
Straight receptacle: solder tail, single row, ultra low profile

Availability from: 1 to 64 contacts
Standard number of contacts 20, 56 and 64

Ultra low version not available as double row

Series 316 / 416


PCB connectors 2.54 mm
Single row / double row
Solder tail






Interconnect receptacles, solder tail

Receptacles accept pins \varnothing 0.40–0.56 mm

For corresponding pin connectors see pages 43 to 46




Platings	Sleeve 	Clip 	Pin 
93	5 μ m Sn Pb	0.75 μ m Au	

Ordering information

Replace **xx** with the number of poles, e.g. 416-93-2**xx**-41-006 for a double row version with 8 pins per row becomes:
416-93-2**16**-41-006

Option:

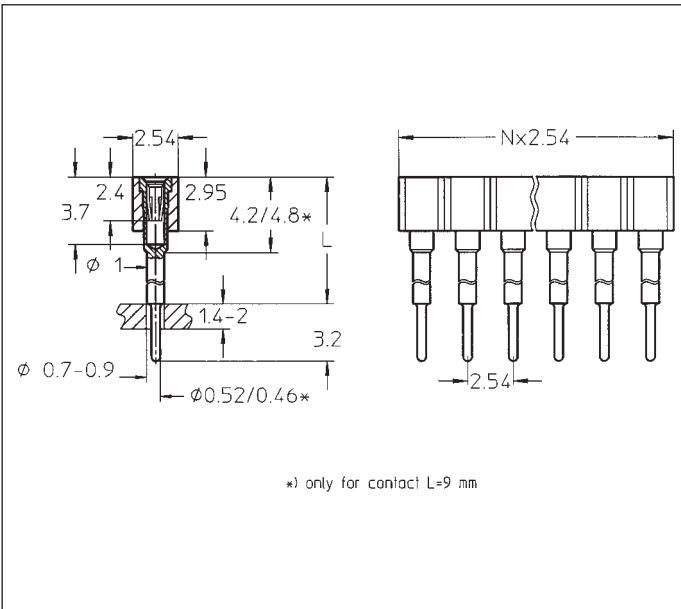On request triple row




L =

6 mm	316-93-1xx-41-006
8 mm	316-93-1xx-41-003
9 mm	316-93-1xx-41-012
10 mm	316-93-1xx-41-007
12 mm	316-93-1xx-41-008
13 mm	316-93-1xx-41-009
15 mm	316-93-1xx-41-001
18 mm	316-93-1xx-41-011
22 mm	316-93-1xx-41-004
33 mm	316-93-1xx-41-013

Interconnect receptacle: solder tail, single row

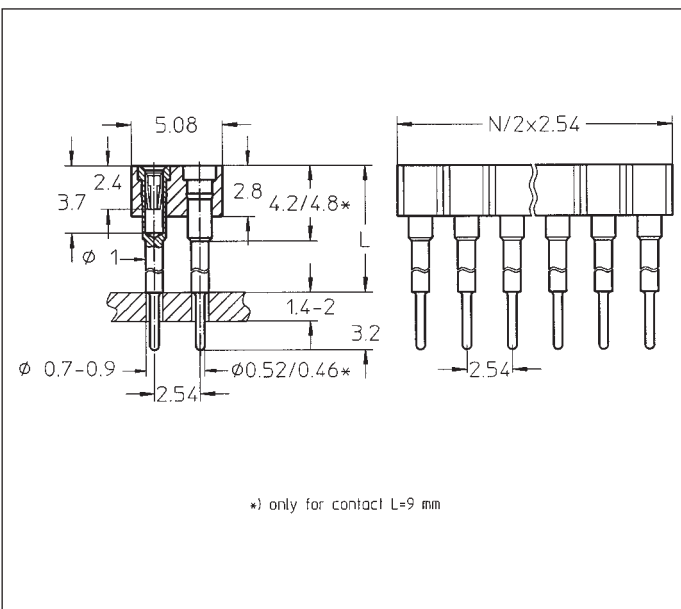Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, and 64




L =

6 mm	416-93-2xx-41-006
8 mm	416-93-2xx-41-003
9 mm	416-93-2xx-41-012
10 mm	416-93-2xx-41-007
12 mm	416-93-2xx-41-008
13 mm	416-93-2xx-41-009
15 mm	416-93-2xx-41-001
18 mm	416-93-2xx-41-011
22 mm	416-93-2xx-41-004
33 mm	416-93-2xx-41-013

Interconnect receptacle: solder tail, double row

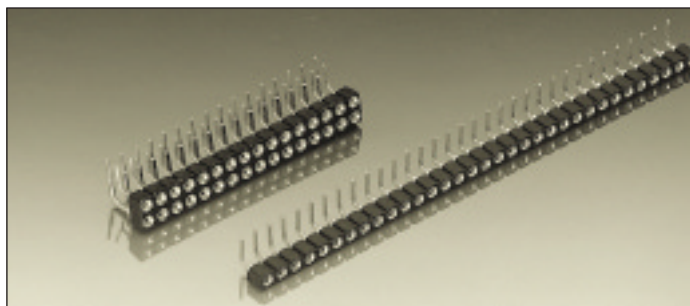Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64 and 72






Right angle receptacles, solder tail

Receptacles accept pins
Ø 0.40–0.56 mm




For corresponding connectors see pages 43 to 46

Platings	Sleeve 	Clip 	Pin 
91 93	5 µm Sn Pb 5 µm Sn Pb	0,25 µm Au 0,75 µm Au	

Ordering information

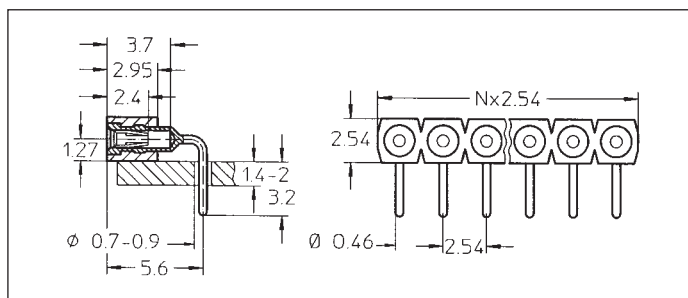
Replace **xx** with the number of poles, e.g. 499-93-2**xx**-10-003
for a double row version with 8 pins per row becomes:
499-93-2**16**-10-003



399-91-1xx-10-003
399-93-1xx-10-003

Right angle receptacle: single row

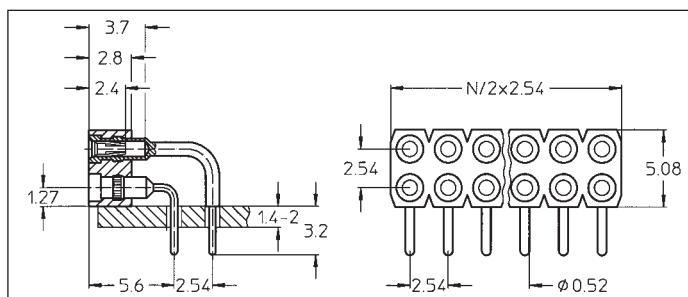Availability from: 1 to 64 contacts
Standard number of contacts 5,
6, 8, 10, 14, 16, 20, 21, 25, 30,
32, 48, 56, 60, 64




499-91-2xx-10-003
499-93-2xx-10-003

Right angle receptacle: double
row

Availability from: 4 to 72 contacts
Standard number of contacts 40,
44, 56, 64, 72

Series 310 / 410

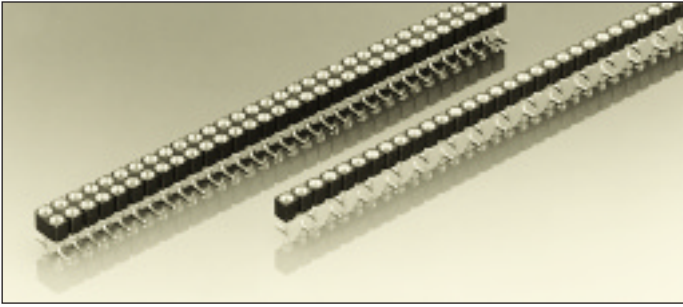PCB connectors 2.54 mm
Single row / double row
Surface mount



Receptacles, surface mount




Accept pins \varnothing 0.40–0.56 mm




For corresponding pin connectors see pages 43 to 46

Ordering information

Replace **xx** with the number of poles, e.g. 410-91-2**xx**-41-105
for a double row version with 8 pins per row becomes:
410-91-2**16**-41-105


Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
97	5 μ m Sn Pb	Goldflash	
99	5 μ m Sn Pb	5 μ m Sn Pb	

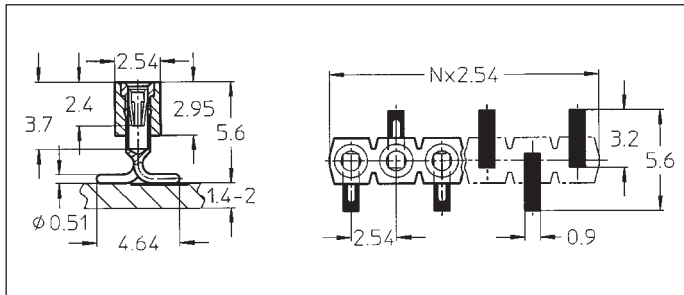

310-91-1xx-41-105
310-93-1xx-41-105
310-97-1xx-41-105
310-99-1xx-41-105

SMD receptacle: single row,
perpendicular mount

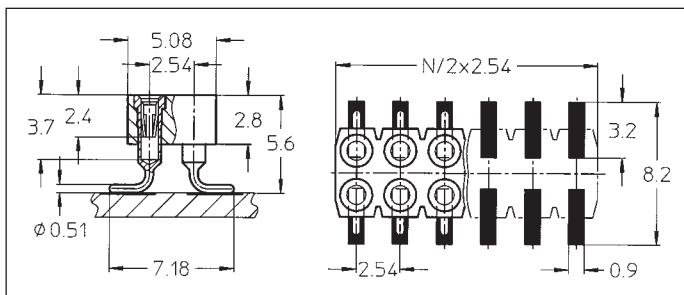
Availability from: 3 to 64 contacts
Standard number of contacts 5,
6, 8, 10, 14, 16, 20, 21, 25, 30,
32, 48, 56, 60, 64



410-91-2xx-41-105
410-93-2xx-41-105
410-97-2xx-41-105
410-99-2xx-41-105

SMD receptacle: double row,
perpendicular mount

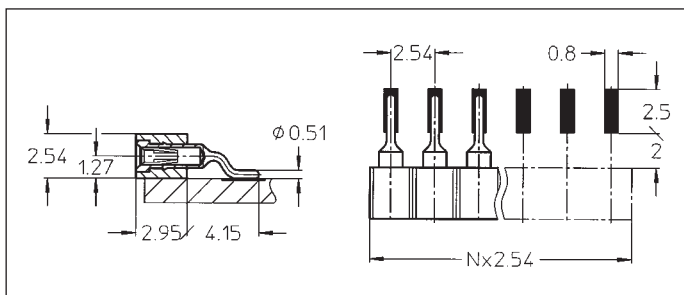Availability from: 4 to 72 contacts
Standard number of contacts 40,
44, 56, 64, 72



310-91-1xx-41-205
310-93-1xx-41-205
310-97-1xx-41-205
310-99-1xx-41-205

SMD receptacle: single row,
parallel mount

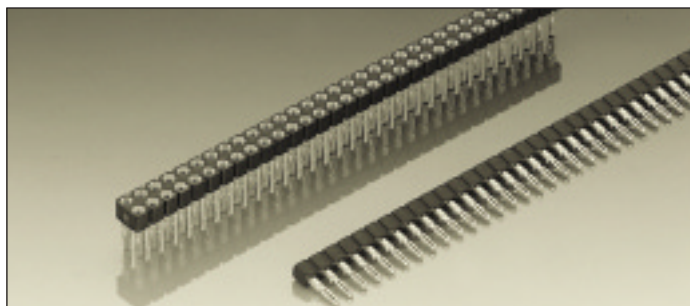
Availability from: 1 to 64 contacts
Standard number of contacts 5,
6, 8, 10, 14, 16, 20, 21, 25, 30,
32, 48, 56, 60, 64

Series 346 / 446

PCB connectors 2.54 mm

Single row / Double row

Press-fit






Receptacles, press-fit

For solderless mount into PCB, plated-thru holes, for pins \varnothing 0.40–0.56 mm



For corresponding pin connectors see pages 43 to 46


New version with modified eye of the needle pin

Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

Ordering information

Replace **xx** with the number of poles, e.g. 346-93-1**xx**-41-035 for a single row version with 8 pins becomes:
346-93-**108**-41-035

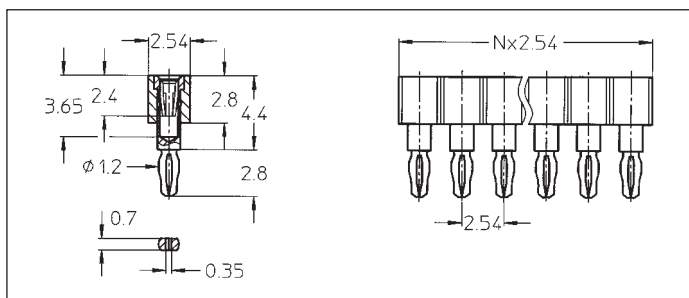(Older versions 346/446-...-41-012/013/019 please consult)



346-91-1xx-41-036

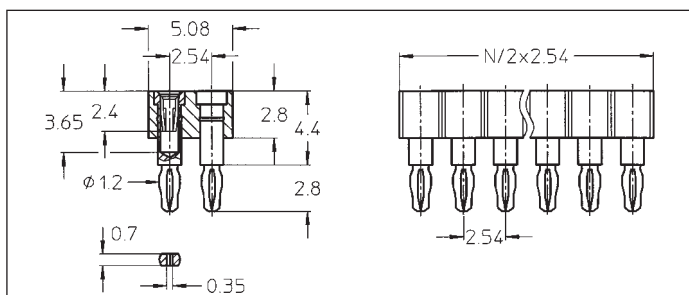
346-93-1xx-41-036

346-99-1xx-41-036

Press-fit receptacle connector:
single row, compliant pin
for plated-thru hole
 \varnothing 1 (+0.09/-0.06) mm

Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

For PCB thickness 1.5 to 2.0 mm



446-91-2xx-41-036

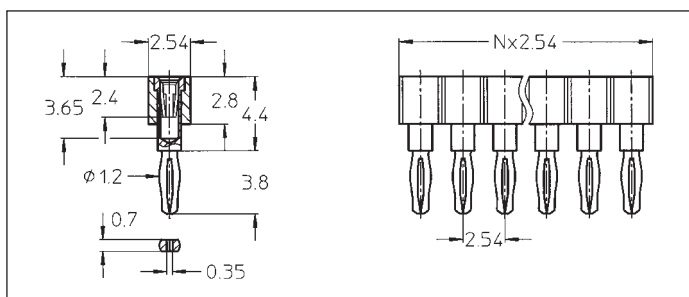
446-93-2xx-41-036

446-99-2xx-41-036

Press-fit receptacle connector:
double row, compliant pin
for plated-thru hole
 \varnothing 1 (+0.09/-0.06) mm

Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72

For PCB thickness 1.5 to 2.0 mm



346-91-1xx-41-035

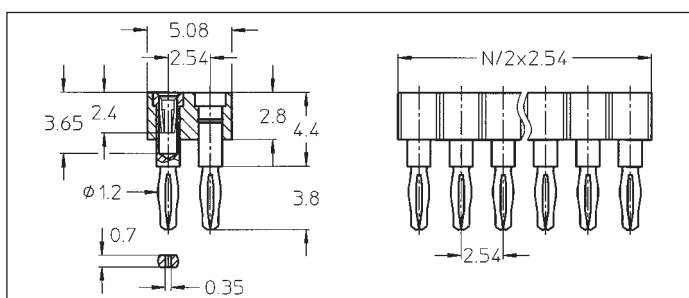
346-93-1xx-41-035

346-99-1xx-41-035

Press-fit receptacle connector:
single row, compliant pin
for plated-thru hole
 \varnothing 1 (+0.09/-0.06) mm

Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

For PCB thickness 2.1 to 3.2 mm



446-91-2xx-41-035

446-93-2xx-41-035

446-99-2xx-41-035

Press-fit receptacle connector:
double row, compliant pin
for plated-thru hole
 \varnothing 1 (+0.09/-0.06) mm

Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72


For PCB thickness 2.1 to 3.2 mm

Series 321–326 / 421–426

PCB connectors 2.54 mm

Single row / double row / wire-wrap

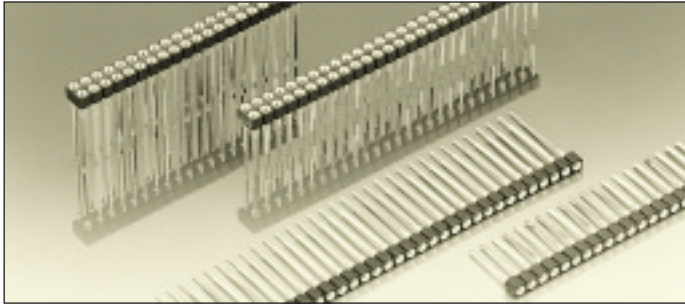
1/2/3/4 level / wire-wrap solder tail






Receptacles with wire-wrap posts Interconnect receptacles with wire-wrap – solder tail combination

Accept pins Ø 0.40–0.56 mm

For corresponding pin connectors see pages
43 to 46




Platings	Sleeve 	Clip 	Pin 
13	0.25 µm Au	0.75 µm Au	
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
99	5 µm Sn Pb	5 µm Pb	

Ordering information

Replace **xx** with required number of poles, e.g.

423-91-**2xx**-41-001 for a double row version with 8 poles per
row becomes:

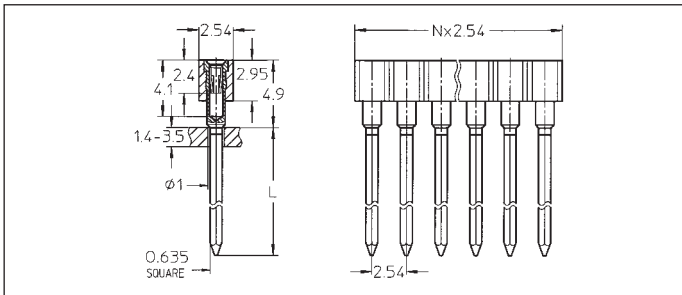423-91-**216**-41-001




321-93-1xx-41-001	B	L = 6.6
322-**-1xx-41-001		9.4
323-**-1xx-41-001		12.95
324-93-1xx-41-002	B	16.0

Please note: ** = all platings
available; 93 = this plating
only.

Wire-wrap receptacle, 1, 2, 3 and
4 level: single row

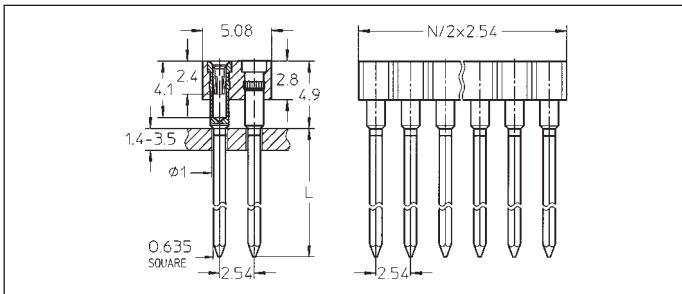Availability from: 1 to 64 contacts
Standard number of contacts 5,
6, 8, 10, 14, 16, 20, 21, 25, 30,
32, 48, 56, 60, 64




421-93-2xx-41-001	B	L = 6.6
422-**-2xx-41-001		9.4
423-**-2xx-41-001		12.95
424-93-2xx-41-002	B	16.0

Please note: ** = all platings
available; 93 = this plating
only.

Wire-wrap receptacle, 1, 2, 3 and
4 level: double row

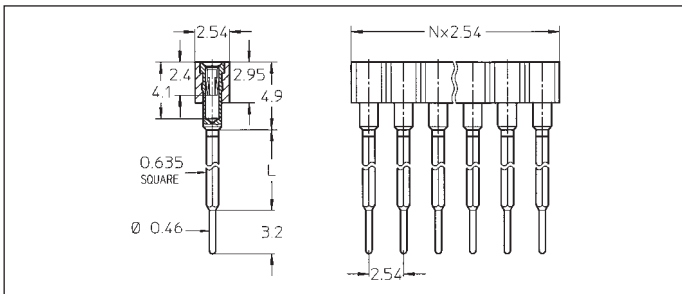
Availability from: 4 to 72 contacts
Standard number of contacts 40,
44, 56, 64, 72



326-93-1xx-41-001	L = 5.9
326-93-1xx-41-002	L = 8.9
326-93-1xx-41-003	L = 11.9

Interconnect receptacle with
wire-wrap – solder tail combina-
tion, single row

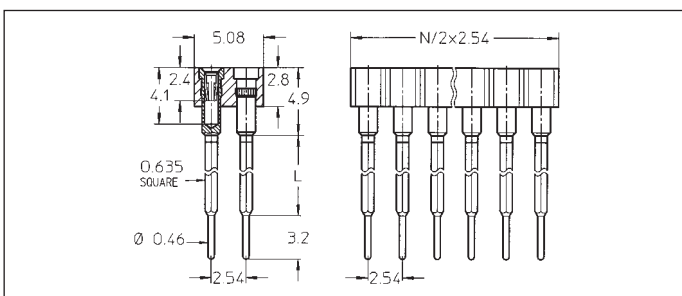Availability from: 1 to 64 contacts
Standard number of contacts 5,
6, 8, 10, 14, 16, 20, 21, 25, 30,
32, 48, 56, 60, 64



426-93-2xx-41-001	L = 5.9
426-93-2xx-41-002	L = 8.9
426-93-2xx-41-003	L = 11.9

Interconnect receptacle with
wire-wrap – solder tail combina-
tion, double row

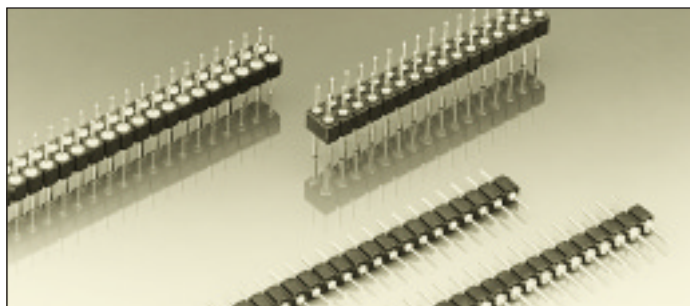
Availability from: 4 to 72 contacts
Standard number of contacts 40,
44, 56, 64, 72

Series 350 / 450

PCB connectors 2.54 mm

Single row / double row


Solder tail



Pin connectors, solder tail

With screw-machined pins $\varnothing 0.47$ mm




For corresponding receptacles see pages 36 to 42 and 47, 48



New:


Pin connectors with selective plated precision screw machined pin, plating code Z1.

Connecting side 1: gold plated
soldering/PCB side 2: tin plated

Platings	Sleeve 	Clip 	Pin 
10 90 Z1			0.25 μ m Au 5 μ m Sn Pb 1: 0.25 μ m Au 2: 5 μ m Sn Pb

Ordering information

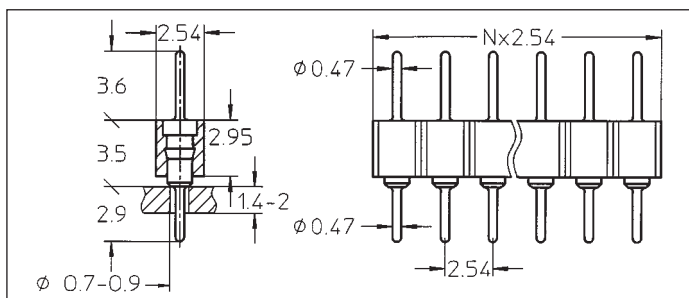Replace **xx** with the number of poles, e.g. 450-10-2**xx**-00-001
for a double row version with 8 pins per row becomes:
450-10-2**16**-00-001




350-10-1xx-00-006

350-90-1xx-00-006

350-Z1-1xx-00-006

Straight pin connector: solder tail, single row

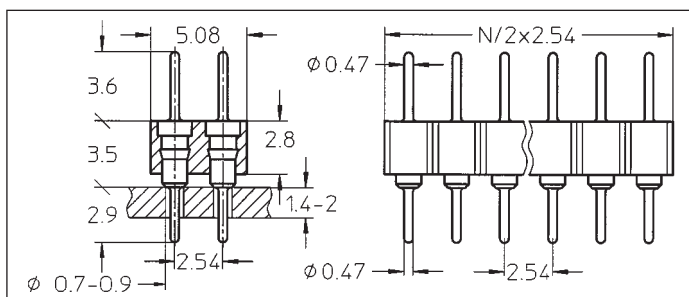Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64




450-10-2xx-00-006

450-90-2xx-00-006

450-Z1-2xx-00-006

Straight pin connector: solder tail, double row

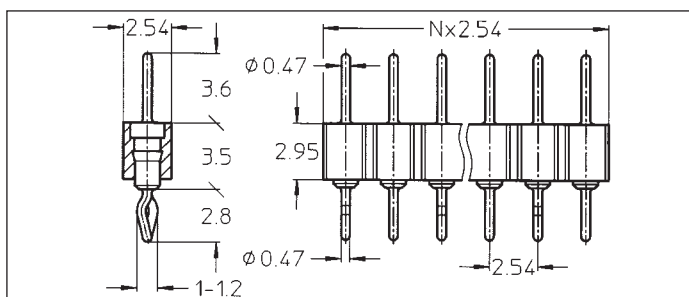Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72



350-10-1xx-01-666

350-90-1xx-01-666

350-Z1-1xx-01-666

Straight pin connector with clinched (right/left) solder tails, single row

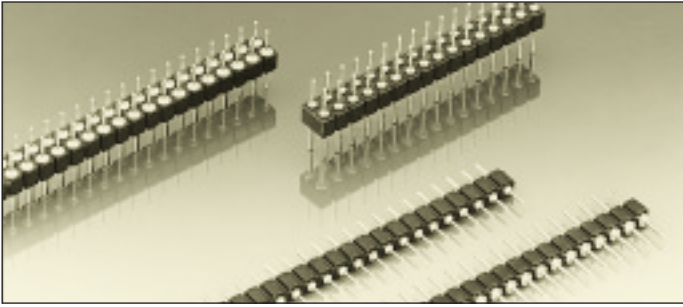
Availability from: 3 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

Series 350 / 351 / 450 / 451

PCB connectors 2.54 mm

Single row / double row

Solder tail






Pin connectors, solder tail

With screw-machined pins $\varnothing 0.47$ mm


For corresponding receptacles see pages 36 to 42 and 47, 48



Platings	Sleeve 	Clip 	Pin 
10 90			0.25 μ m Au 5 μ m Sn Pb

Ordering information

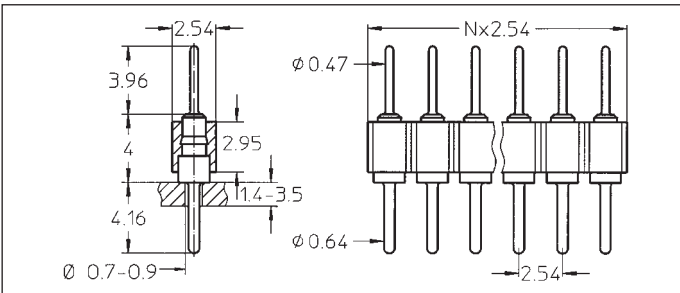Replace **xx** with the number of poles, e.g. 450-10-**2xx**-00-001 for a double row version with 8 pins per row becomes:
450-10-**216**-00-001




350-10-1xx-00-001

350-90-1xx-00-001

Straight pin connector: solder tail, single row

Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

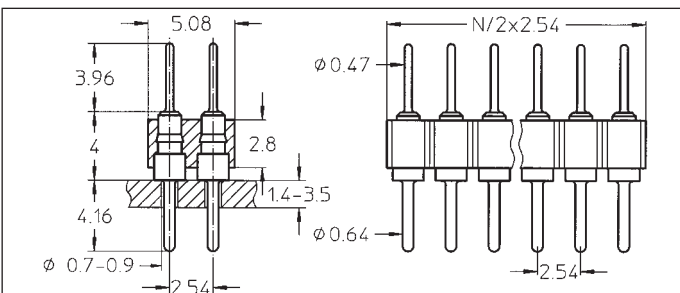Note:
For new designs refer to 006 version




450-10-2xx-00-001

450-90-2xx-00-001

Straight pin connector: solder tail, double row

Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72

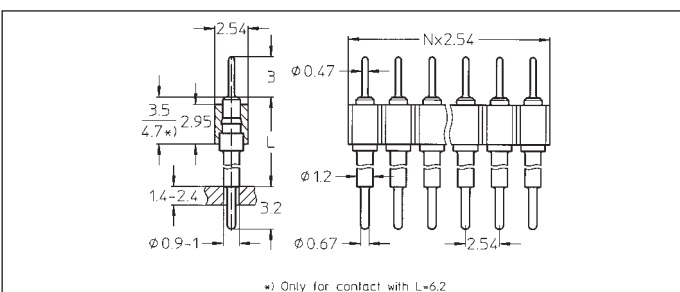Note:
For new designs refer to 006 version




* Only for contact with L=6.2

	L =
351-10-1xx-00-003	6.2 mm
351-90-1xx-00-003	
351-10-1xx-00-004	8.4 mm
351-90-1xx-00-004	
351-10-1xx-00-005	15.3 mm
351-90-1xx-00-005	
351-10-1xx-00-016	21.2 mm
351-90-1xx-00-016	
351-10-1xx-00-017	27.4 mm
351-90-1xx-00-017	

Straight interconnect pin connector solder tail, single row

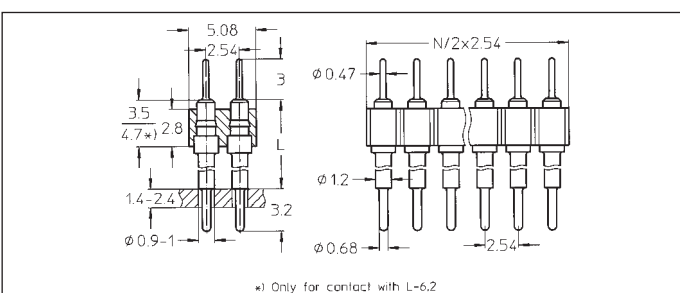Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64




* Only for contact with L=6.2

	L =
451-10-2xx-00-003	6.2 mm
451-90-2xx-00-003	
451-10-2xx-00-004	8.4 mm
451-90-2xx-00-004	
451-10-2xx-00-005	15.3 mm
451-90-2xx-00-005	
451-10-2xx-00-016	21.2 mm
451-90-2xx-00-016	
451-10-2xx-00-017	27.4 mm
451-90-2xx-00-017	


Straight interconnect pin connector solder tail, double row

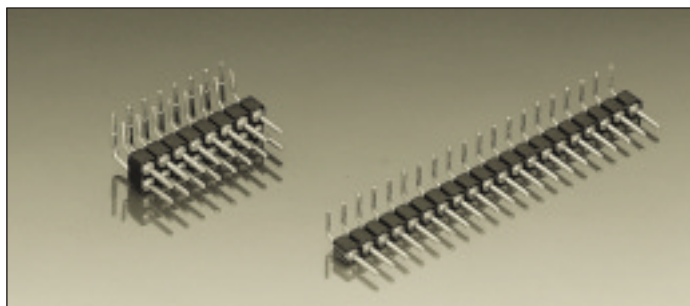Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72



Right angle pin connectors, solder tail




Pin connectors with pins \varnothing 0.47 mm



For corresponding connectors see pages
36 to 42 and 47, 48


New:

Pin connectors with selective plated precision screw machined pin, plating code Z1.
Connecting side 1: gold plated
soldering/PCB side 2: tin plated

Platings	Sleeve 	Clip 	Pin 
10 90 Z1			0,25 μ m Au 5 μ m Sn Pb 1: 0.25 μ m Au 2: 5 μ m Sn Pb

Ordering information

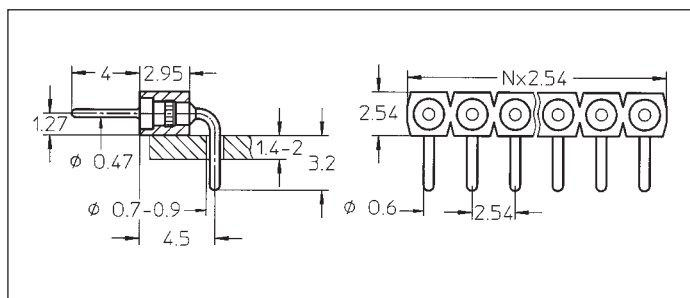Replace **xx** with the number of poles, e.g. 499-93-2**xx**-10-009
for a double row version with 8 pins per row becomes:
499-93-2**16**-10-009




399-10-1xx-10-009

399-90-1xx-10-009

399-Z1-1xx-10-009

Right angle pin connector: single row

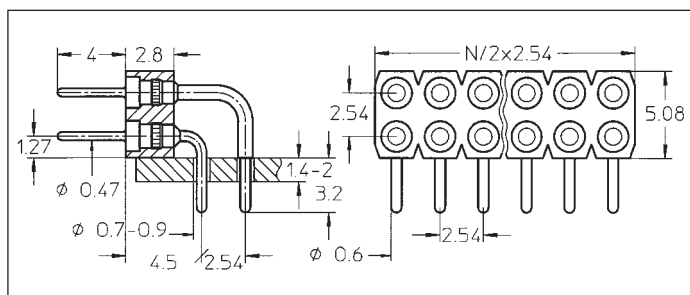Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64



499-10-2xx-10-009

499-90-2xx-10-009

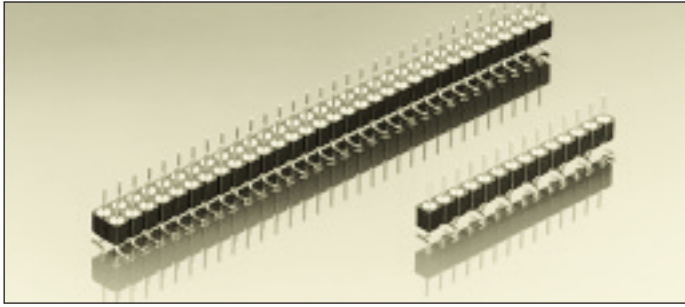
499-Z1-2xx-10-009

Right angle pin connector: double row

Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72

Series 350 / 450


PCB connectors 2.54 mm
Single row / double row
Surface mount



Pin connectors, surface mount

With screw machined pins $\varnothing 0.47$ mm




For corresponding receptacles see pages 36 to 42 and 47, 48



New:


Pin connectors with selective plated precision screw machined pin, plating code Z1.

Connecting side 1: gold plated
soldering/PCB side 2: tin plated

Platings	Sleeve 	Clip 	Pin 
10 90 Z1			0.25 μ m Au 5 μ m Sn Pb 1: 0.25 μ m Au 2: 5 μ m Sn Pb

Ordering information

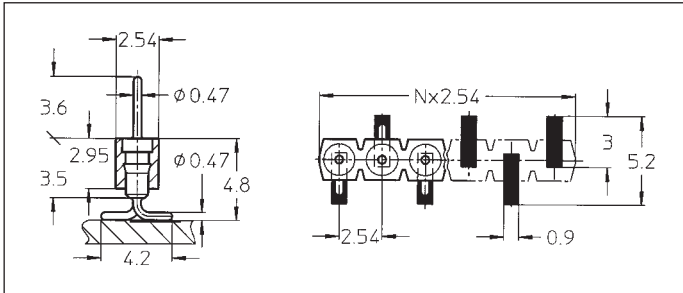
Replace **xx** with the number of poles, e.g. 350-10-1**xx**-00-106 for a single row version with 16 contacts becomes:
350-10-1**16**-00-106



350-10-1xx-00-106
350-90-1xx-00-106
350-Z1-1xx-00-106

SMD pin connector: single row, perpendicular mount

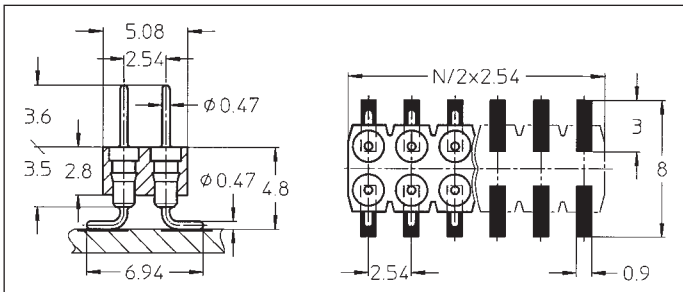
Availability from: 3 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64



450-10-2xx-00-106
450-90-2xx-00-106
450-Z1-2xx-00-106

SMD pin connector: double row, perpendicular mount

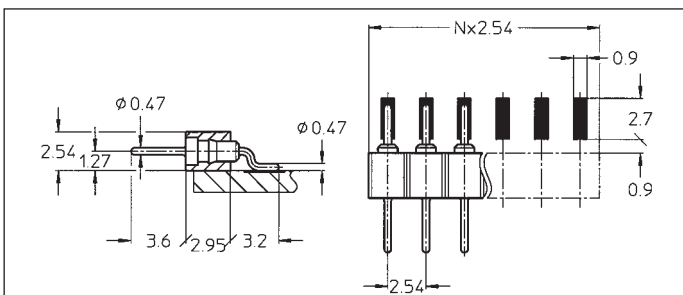
Availability from: 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64, 72



350-10-1xx-00-206
350-90-1xx-00-206
350-Z1-1xx-00-206

SMD pin connector: single row, parallel mount

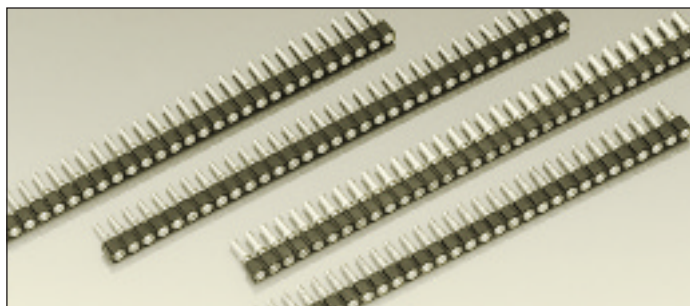Availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64



PCB "Zero profile" receptacles

Accept pins \varnothing 0.40–0.56 mm



Single receptacle contacts for solder mount into PCB, supplied on disposable carriers.




For corresponding pin connectors see pages 43 to 46


Ordering information

Replace **xx** with the number of poles, e.g. 714-91-2**xx**-41-001 for a double row version with 8 pins per row becomes:
714-91-2**16**-41-001

Option:

Double row, disposable carrier strip on request

Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

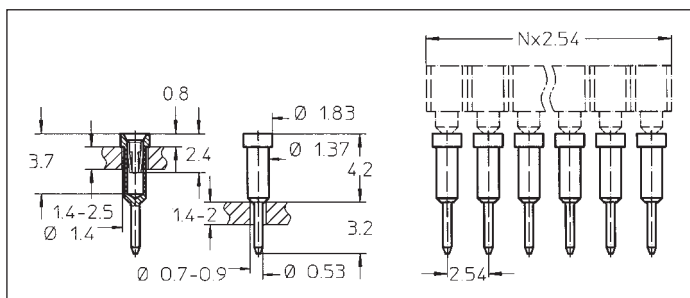


712-91-1xx-41-001

712-93-1xx-41-001

712-99-1xx-41-001

Straight receptacle contacts: solder mount, into PCB thickness 1.4 to 2 mm with hole \varnothing 0.7 to 0.9 mm

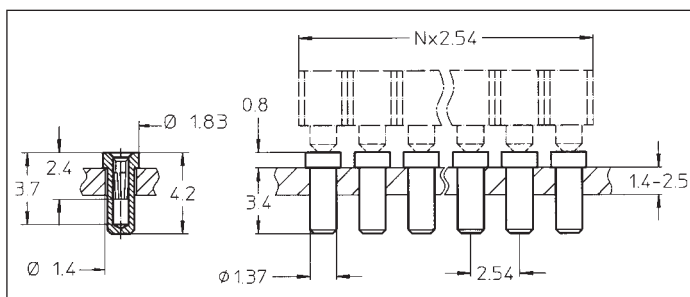Availability: supplied on single row, disposable carrier strip, from 2 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64




714-91-1xx-41-001

714-93-1xx-41-001

714-99-1xx-41-001

Straight receptacle contacts: solder mount into PCB thickness 1 to 2.6 mm with hole \varnothing 1.5 mm

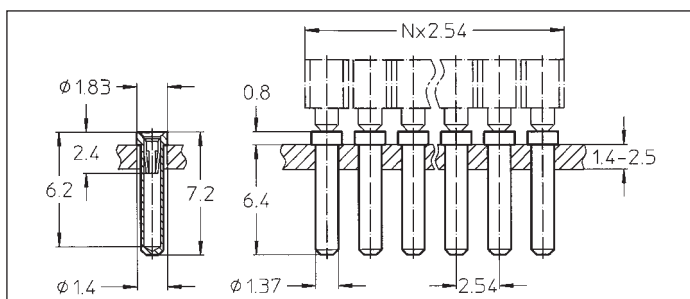Availability: supplied on single row, disposable carrier strip, from 2 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64



714-91-1xx-41-014 **B**

714-93-1xx-41-014 **B**

714-99-1xx-41-014 **B**

Straight receptacle contacts: solder mount into PCB thickness 1 to 4 mm with hole \varnothing 1.5 mm

Availability: supplied on single row, disposable carrier strip, from 2 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

Series 714

PCB connectors carrier assemblies 2.54 mm

Single row / double row

Solder tail / press-fit



PCB "Zero profile" receptacles

Accept pins \varnothing 0.40–0.54 mm



Single receptacle contacts for solder- and press-fit solderless mount into PCB, supplied on disposable carriers




For corresponding pin connectors see pages 43 to 46


Ordering information

Replace **xx** with the number of poles, e.g. 714-91-1**xx**-31-012 for a single row version with 8 pins per row becomes: 714-91-1**08**-31-012

Option:

Double row, disposable carrier strip on request

Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
99	5 μ m Sn Pb	5 μ m Sn Pb	

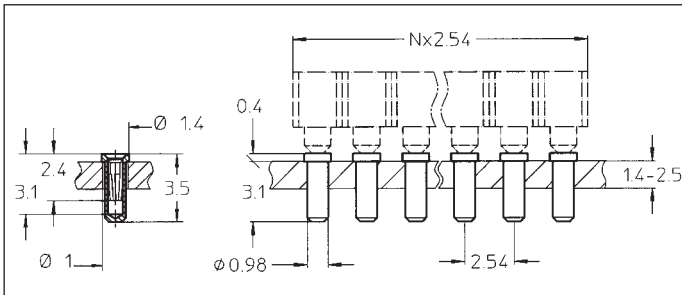

714-91-1xx-31-012

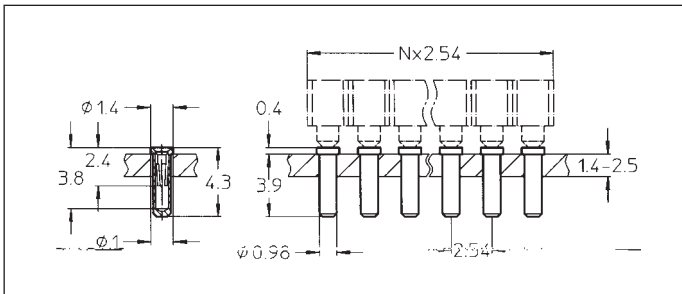
714-93-1xx-31-012

714-99-1xx-31-012

Straight receptacle contacts: solder mount into PCB thickness 1 to 2.4 mm with hole \varnothing 1 mm

Availability: supplied on single row, disposable carrier strip, from 2 to 64 contacts

Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64



714-91-1xx-31-018

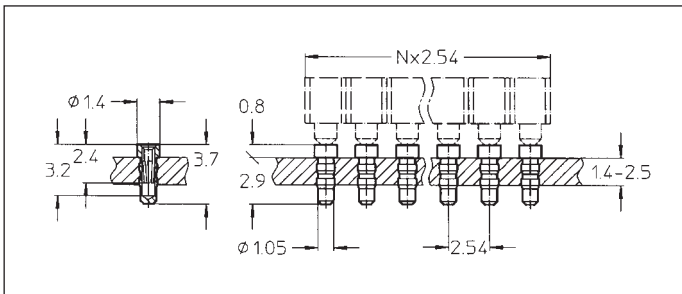
714-93-1xx-31-018

714-99-1xx-31-018

Straight receptacle contacts: solder mount into PCB thickness 1 to 3.4 mm with hole \varnothing 1 mm

Availability: supplied on single row, disposable carrier strip, from 2 to 64 contacts

Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64



714-91-1xx-31-008 **B**

714-93-1xx-31-008 **B**

714-99-1xx-31-008 **B**

Straight receptacle contacts: solderless press-fit mount into PCB thickness 1.5 to 2.5 mm with plated-thru hole \varnothing 1.05 mm (\pm 0.05)

Availability: supplied on single row, disposable carrier strip, from 2 to 64 contacts

Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60, 64

Technical specifications

Materials

- Insulator: Glass filled thermoplastic polyester, self extinguishing UL 94 V-0, colour black, resistant to mineral acids, solvents, greases, oils (short time).
- Receptacle contact:
 - Sleeve: Screw-machined brass (QQ-B-626), gold or tin-lead plated (90/10) over 2–3 μm nickel
 - Clip: Stamped beryllium-copper (QQ-C-533), gold or tin-lead (90/10) plated over 2–3 μm nickel
- Pin contact: Screw-machined brass (QQ-B-626) or phosphor bronze (QQ-B-750), gold or tin-lead plated (90/10) over 2–3 μm nickel

Mechanical data

- Insertion characteristics
(measured with a polished steel gauge, typical values):
- Type of clip (finger):

	4	4	3	6
standard		short		
- Gauge diameter (mm):

	0.43	0.43	0.43	0.46
Insertion force (N):	1.8	2	1	0.6
Withdrawal force (N):	0.9	1	0.5	0.3
- Mechanical life: min. 100 cycles

Electrical data

- Rated current: 1 A
- Rated voltage: 100 V_{RMS} / 150 V_{DC}
- Contact resistance: 10 $\text{m}\Omega$ max.
- Insulation resistance: 10 000 $\text{M}\Omega$ min.
- Dielectric strength: 1000 V_{RMS} min.
(700 for Series 117 Shrink-Dip)
- Air and creepage distances: 0.6 mm
(0.3 for Series 117 Shrink-Dip)
- Capacitance: 0.3 pF max.
(1 for series 117 Shrink-Dip)

Environmental data

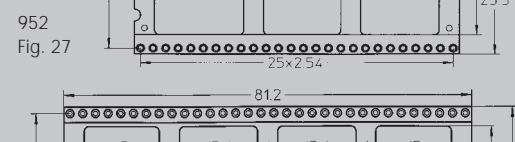
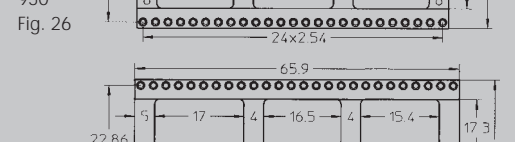
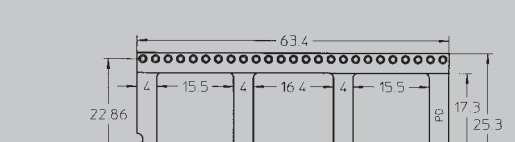
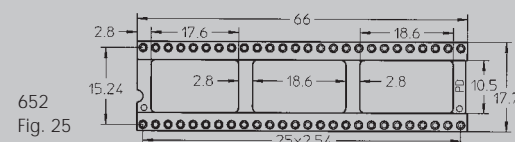
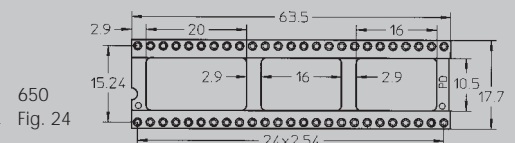


























- Operating temperature: –55/+125 °C
- Vibration
(10–2000 Hz, 15 g): no electrical discontinuity > 1 μs
- Shock: (50 g): no electrical discontinuity > 1 μs
- Solderability
(IEC 68-2-54 Ta): 235 °C, 5 s
- Resistance to soldering heat:
(IEC 68-2-20 Tb): 260 °C, 5 s
- Resistance to atmospheric corrosion: IEC 68-2-42 and 43
- Climatic category (IEC): 55/125/21

PRECI-DIP

DURTAL

Dual-in-line Insulator bodies Standard, open frame

50



















Open frame insulators 318, 320, 322, 324, 624, 628, 632, 640 and 648 available on special request without center bars.

Order number same as the corresponding socket with bars but with suffix 050 added.





















Example:
110-93-628-41-001 standard
110-93-628-41-001050
Same but without center bar.

Standard, open frame

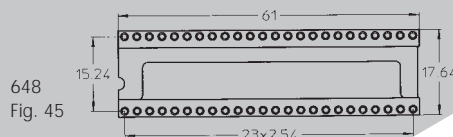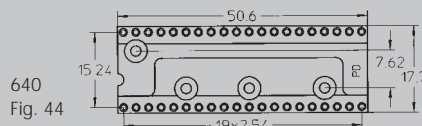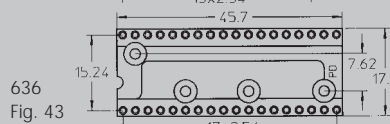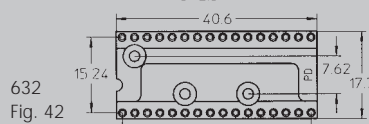Dual-in-line Insulator bodies Standard, closed frame Ultra low, open frame



Standard, closed frame

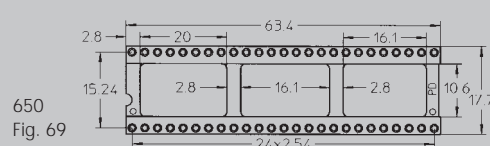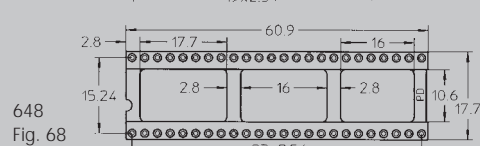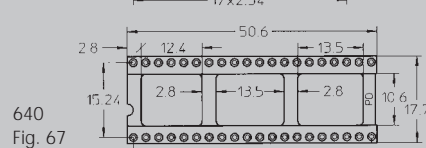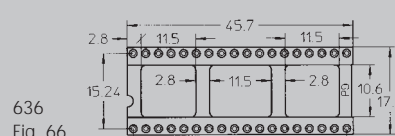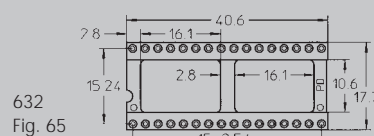


















Ultra low, open frame

Dual-in-line










Insulator bodies

Shrinkdip, open and closed frame

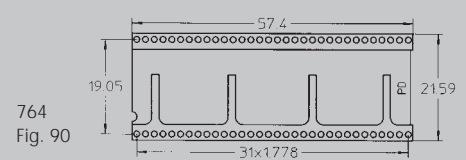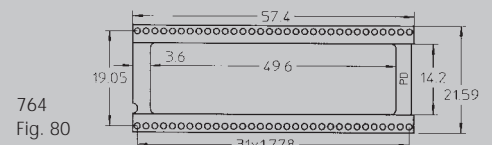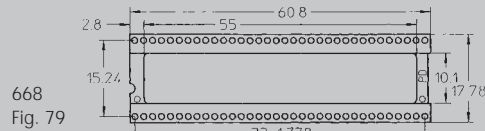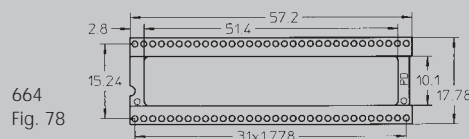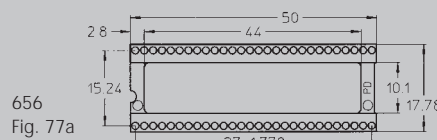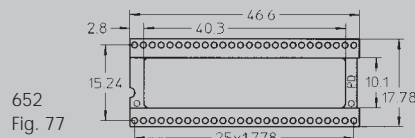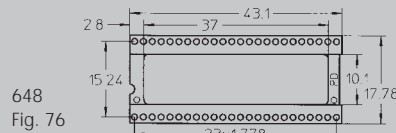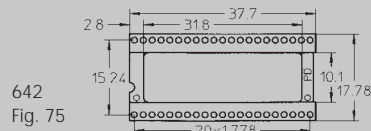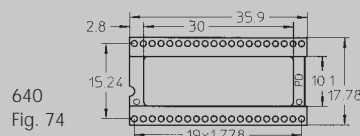Automatic insertion, open frame



Shrinkdip,
open and closed frame

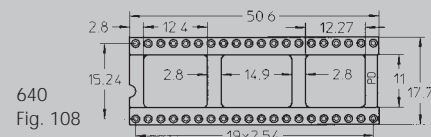

Automatic insertion,
open frame


Series 111

Dual-in-line sockets for multilayer PCB

Open frame

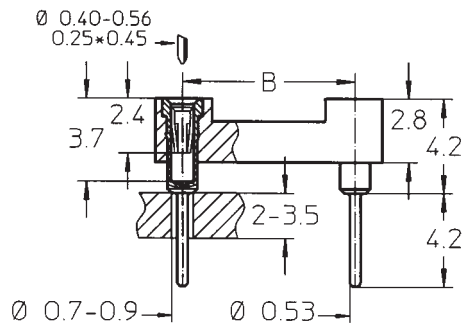
Solder tail




54



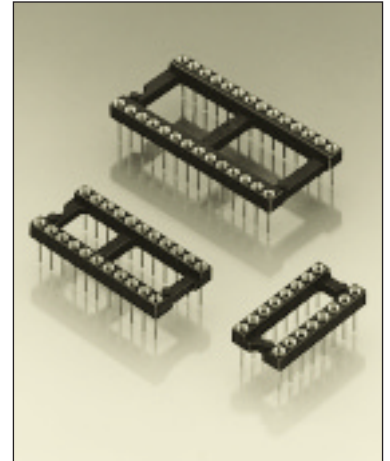Standard Dual-in-line socket with increased solder tail length of 4.2 mm, allowing application on multilayer PCBs up to 3.4 mm thickness. Other lengths on request


Insertion characteristics:
4-finger standard




Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
99	5 µm Sn Pb	5 µm Sn Pb	

Ordering information

For complete part number see Order Codes list below


No. of poles	Order Codes					Insulator dimen- sions				
	Plating 91 B	Plating 93 B	Plating 99 B				See page 50	A	B	C
10	111-91-210-41-001	111-93-210-41-001	111-99-210-41-001			Fig. 1	12.6	5.08	7.6	
4	111-91-304-41-001	111-93-304-41-001	111-99-304-41-001			Fig. 2	5.0	7.62	10.1	
6	111-91-306-41-001	111-93-306-41-001	111-99-306-41-001			Fig. 3	7.6	7.62	10.1	
8	111-91-308-41-001	111-93-308-41-001	111-99-308-41-001			Fig. 4	10.1	7.62	10.1	
10	111-91-310-41-001	111-93-310-41-001	111-99-310-41-001			Fig. 5	12.6	7.62	10.1	
12	111-91-312-41-001	111-93-312-41-001	111-99-312-41-001			Fig. 5a	15.2	7.62	10.1	
14	111-91-314-41-001	111-93-314-41-001	111-99-314-41-001			Fig. 6	17.7	7.62	10.1	
16	111-91-316-41-001	111-93-316-41-001	111-99-316-41-001			Fig. 7	20.3	7.62	10.1	
18	111-91-318-41-001	111-93-318-41-001	111-99-318-41-001			Fig. 8	22.8	7.62	10.1	
20	111-91-320-41-001	111-93-320-41-001	111-99-320-41-001			Fig. 9	25.3	7.62	10.1	
22	111-91-322-41-001	111-93-322-41-001	111-99-322-41-001			Fig. 10	27.8	7.62	10.1	
24	111-91-324-41-001	111-93-324-41-001	111-99-324-41-001			Fig. 11	30.4	7.62	10.1	
28	111-91-328-41-001	111-93-328-41-001	111-99-328-41-001			Fig. 12	35.5	7.62	10.1	
20	111-91-420-41-001	111-93-420-41-001	110-99-420-41-001			Fig. 12a	25.3	10.16	12.6	
22	111-91-422-41-001	111-93-422-41-001	111-99-422-41-001			Fig. 13	27.8	10.16	12.6	
24	111-91-424-41-001	111-93-424-41-001	111-99-424-41-001			Fig. 14	30.4	10.16	12.6	
28	111-91-428-41-001	111-93-428-41-001	111-99-428-41-001			Fig. 15	35.5	10.16	12.6	
32	111-91-432-41-001	111-93-432-41-001	111-99-432-41-001			Fig. 16	40.6	10.16	12.6	
10	111-91-610-41-001	110-93-610-41-001	110-99-610-41-001			Fig. 16a	12.6	15.24	17.7	
24	111-91-624-41-001	111-93-624-41-001	111-99-624-41-001			Fig. 17	30.4	15.24	17.7	
28	111-91-628-41-001	111-93-628-41-001	111-99-628-41-001			Fig. 18	35.5	15.24	17.7	
32	111-91-632-41-001	111-93-632-41-001	111-99-632-41-001			Fig. 19	40.6	15.24	17.7	
36	111-91-636-41-001	111-93-636-41-001	111-99-636-41-001			Fig. 20	45.7	15.24	17.7	
40	111-91-640-41-001	111-93-640-41-001	111-99-640-41-001			Fig. 21	50.6	15.24	17.7	
42	111-91-642-41-001	111-93-642-41-001	111-99-642-41-001			Fig. 22	53.2	15.24	17.7	
48	111-91-648-41-001	111-93-648-41-001	111-99-648-41-001			Fig. 23	60.9	15.24	17.7	
50	111-91-650-41-001	111-93-650-41-001	111-99-650-41-001			Fig. 24	63.4	15.24	17.7	
52	111-91-652-41-001	111-93-652-41-001	111-99-652-41-001			Fig. 25	65.9	15.24	17.7	
50	111-91-950-41-001	111-93-950-41-001	111-99-950-41-001			Fig. 26	63.4	22.86	25.3	
52	111-91-952-41-001	111-93-952-41-001	111-99-952-41-001			Fig. 27	65.9	22.86	25.3	
64	111-91-964-41-001	111-93-964-41-001	111-99-964-41-001			Fig. 28	81.1	22.86	25.3	

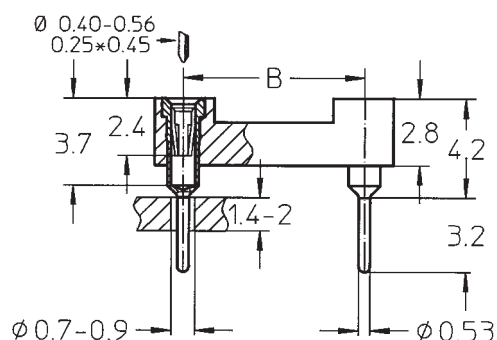


B Products not available from stock. Please consult PRECI-DIP.



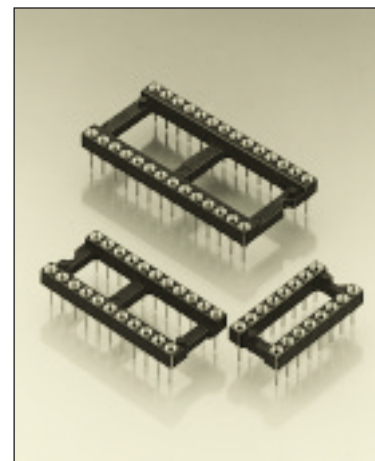Standard dual-in-line socket with soft copper alloy machined contact allows clinching. Open frame design leaves space beneath IC for improved heat dissipation, easier PCB cleaning and inspections

Insertion characteristics:
4-finger standard




Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
97	5 µm Sn Pb	Goldflash	
99	5 µm Sn Pb	5 µm Sn Pb	


Ordering information

For standard versions see table (order codes)

Option:

On special request available with solder tail length 4.2 mm, for multilayer boards up to 3.4 mm. Part number: 111-xx-xxx-41-013


No. of poles	Order Codes					Insulator dimen- sions			
	Plating 91	Plating 93	Plating 97	Plating 99			See page 50	A	B
10	110-91-210-41-005	110-93-210-41-005	110-97-210-41-005	110-99-210-41-005		Fig. 1	12.6	5.08	7.6
4	110-91-304-41-005	110-93-304-41-005	110-97-304-41-005	110-99-304-41-005		Fig. 2	5.0	7.62	10.1
6	110-91-306-41-005	110-93-306-41-005	110-97-306-41-005	110-99-306-41-005		Fig. 3	7.6	7.62	10.1
8	110-91-308-41-005	110-93-308-41-005	110-97-308-41-005	110-99-308-41-005		Fig. 4	10.1	7.62	10.1
10	110-91-310-41-005	110-93-310-41-005	110-97-310-41-005	110-99-310-41-005		Fig. 5	12.6	7.62	10.1
12	110-91-312-41-005	110-93-312-41-005	110-97-312-41-005	110-99-312-41-005		Fig. 5a	15.2	7.62	10.1
14	110-91-314-41-005	110-93-314-41-005	110-97-314-41-005	110-99-314-41-005		Fig. 6	17.7	7.62	10.1
16	110-91-316-41-005	110-93-316-41-005	110-97-316-41-005	110-99-316-41-005		Fig. 7	20.3	7.62	10.1
18	110-91-318-41-005	110-93-318-41-005	110-97-318-41-005	110-99-318-41-005		Fig. 8	22.8	7.62	10.1
20	110-91-320-41-005	110-93-320-41-005	110-97-320-41-005	110-99-320-41-005		Fig. 9	25.3	7.62	10.1
22	110-91-322-41-005	110-93-322-41-005	110-97-322-41-005	110-99-322-41-005		Fig. 10	27.8	7.62	10.1
24	110-91-324-41-005	110-93-324-41-005	110-97-324-41-005	110-99-324-41-005		Fig. 11	30.4	7.62	10.1
28	110-91-328-41-005	110-93-328-41-005	110-97-328-41-005	110-99-328-41-005		Fig. 12	35.5	7.62	10.1
20	110-91-420-41-005	110-93-420-41-005	110-97-420-41-005	110-99-420-41-005		Fig. 12a	25.3	10.16	12.6
22	110-91-422-41-005	110-93-422-41-005	110-97-422-41-005	110-99-422-41-005		Fig. 13	27.8	10.16	12.6
24	110-91-424-41-005	110-93-424-41-005	110-97-424-41-005	110-99-424-41-005		Fig. 14	30.4	10.16	12.6
28	110-91-428-41-005	110-93-428-41-005	110-97-428-41-005	110-99-428-41-005		Fig. 15	35.5	10.16	12.6
32	110-91-432-41-005	110-93-432-41-005	110-97-432-41-005	110-99-432-41-005		Fig. 16	40.6	10.16	12.6
10	110-91-610-41-005	110-93-610-41-005	110-97-610-41-005	110-99-610-41-005		Fig. 16a	12.6	15.24	17.7
24	110-91-624-41-005	110-93-624-41-005	110-97-624-41-005	110-99-624-41-005		Fig. 17	30.4	15.24	17.7
28	110-91-628-41-005	110-93-628-41-005	110-97-628-41-005	110-99-628-41-005		Fig. 18	35.5	15.24	17.7
32	110-91-632-41-005	110-93-632-41-005	110-97-632-41-005	110-99-632-41-005		Fig. 19	40.6	15.24	17.7
36	110-91-636-41-005	110-93-636-41-005	110-97-636-41-005	110-99-636-41-005		Fig. 20	45.7	15.24	17.7
40	110-91-640-41-005	110-93-640-41-005	110-97-640-41-005	110-99-640-41-005		Fig. 21	50.6	15.24	17.7
42	110-91-642-41-005	110-93-642-41-005	110-97-642-41-005	110-99-642-41-005		Fig. 22	53.2	15.24	17.7
48	110-91-648-41-005	110-93-648-41-005	110-97-648-41-005	110-99-648-41-005		Fig. 23	60.9	15.24	17.7

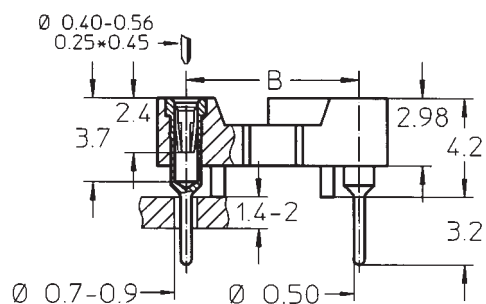




Thanks to the new design of the insulator body, this socket line is fully compatible with all standard automatic insertion equipment

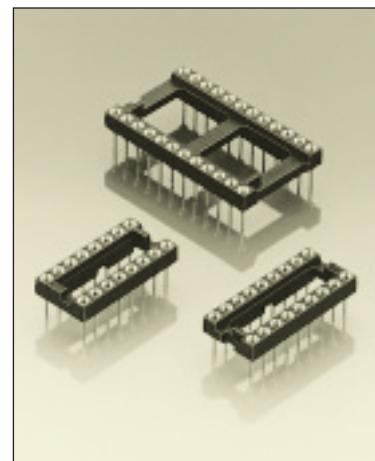- Chamfered contact entries for easy IC insertion without bent leads.
- Soft copper alloy machined contact allows clinching

Insertion characteristics:
4-finger standard




Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
97	5 µm Sn Pb	Goldflash	
99	5 µm Sn Pb	5 µm Sn Pb	

Ordering information

For standard versions see table (order codes)

Option:

For multilayer boards up to 3.4 mm, solder tail 4.2 mm, we offer series 111-xx-xxx-41-613

No. of poles	Order Codes					Insulator dimensions			
	Plating 91	Plating 93	Plating 97	Plating 99			A	B	C
6	110-91-306-41-605	110-93-306-41-605	110-97-306-41-605	110-99-306-41-605		Fig. 100	7.6	7.62	10.1
8	110-91-308-41-605	110-93-308-41-605	110-97-308-41-605	110-99-308-41-605		Fig. 101	10.1	7.62	10.1
14	110-91-314-41-605	110-93-314-41-605	110-97-314-41-605	110-99-314-41-605		Fig. 102	17.7	7.62	10.1
16	110-91-316-41-605	110-93-316-41-605	110-97-316-41-605	110-99-316-41-605		Fig. 103	20.3	7.62	10.1
18	110-91-318-41-605	110-93-318-41-605	110-97-318-41-605	110-99-318-41-605		Fig. 104	22.8	7.62	10.1
20	110-91-320-41-605	110-93-320-41-605	110-97-320-41-605	110-99-320-41-605		Fig. 105	25.3	7.62	10.1
24	110-91-324-41-605	110-93-324-41-605	110-97-324-41-605	110-99-324-41-605		Fig. 106	30.4	7.62	10.1
22	110-91-422-41-605	110-93-422-41-605	110-97-422-41-605	110-99-422-41-605		Fig. 107	27.8	10.16	12.6
24	110-91-624-41-605	110-93-624-41-605	110-97-624-41-605	110-99-624-41-605		Fig. 17	30.4	15.24	17.7
28	110-91-628-41-605	110-93-628-41-605	110-97-628-41-605	110-99-628-41-605		Fig. 18	35.5	15.24	17.7
32	110-91-632-41-605	110-93-632-41-605	110-97-632-41-605	110-99-632-41-605		Fig. 19	40.6	15.24	17.7
40	110-91-640-41-605	110-93-640-41-605	110-97-640-41-605	110-99-640-41-605		Fig. 108	50.6	15.24	17.7

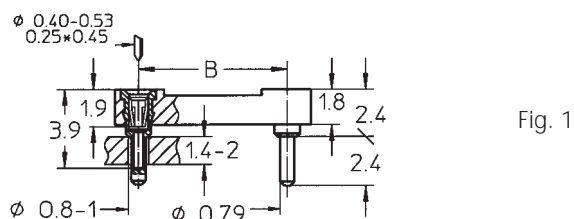


Fig. 1

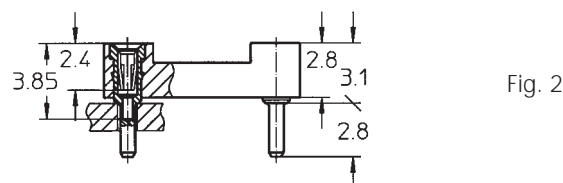
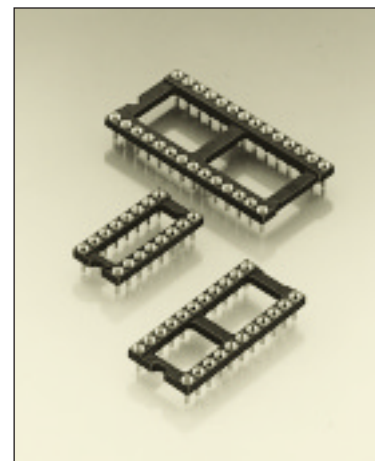





Fig. 2

Preci-Dip "Very low / Ultra low profile" sockets have specially designed contacts for reduced socket height above PCB

Insertion characteristics:
4-finger standard
(very low)
4-finger short (ultra low)




Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
97	5 µm Sn Pb	Goldflash	
99	5 µm Sn Pb	5 µm Sn Pb	


Ordering information

For standard version (ultra low) (Fig. 1) see table

Option:

Very low version (Fig. 2) is optional; change suffix 003 to 001.
Insulator body dimensions see page 50 Fig. 1 to 28. Same number of poles as standard series 110.


No. of poles	Order Codes					Insulator dimensions			
	Plating 91	Plating 93 B	Plating 97	Plating 99 B			A	B	C
6	115-91-306-41-003	115-93-306-41-003	115-97-306-41-003	115-99-306-41-003		Fig. 50	7.6	7.62	10.1
8	115-91-308-41-003	115-93-308-41-003	115-97-308-41-003	115-99-308-41-003		Fig. 51	10.1	7.62	10.1
10	115-91-310-41-003	115-93-310-41-003	115-97-310-41-003	115-99-310-41-003		Fig. 51a	12.6	7.62	10.1
14	115-91-314-41-003	115-93-314-41-003	115-97-314-41-003	115-99-314-41-003		Fig. 52	17.7	7.62	10.1
16	115-91-316-41-003	115-93-316-41-003	115-97-316-41-003	115-99-316-41-003		Fig. 53	20.3	7.62	10.1
18	115-91-318-41-003	115-93-318-41-003	115-97-318-41-003	115-99-318-41-003		Fig. 54	22.8	7.62	10.1
20	115-91-320-41-003	115-93-320-41-003	115-97-320-41-003	115-99-320-41-003		Fig. 55	25.3	7.62	10.1
22	115-91-322-41-003	115-93-322-41-003	115-97-322-41-003	115-99-322-41-003		Fig. 56	27.8	7.62	10.1
24	115-91-324-41-003	115-93-324-41-003	115-97-324-41-003	115-99-324-41-003		Fig. 57	30.4	7.62	10.1
28	115-91-328-41-003	115-93-328-41-003	115-97-328-41-003	115-99-328-41-003		Fig. 58	35.5	7.62	10.1
20	115-91-420-41-003	115-93-420-41-003	115-97-420-41-003	115-99-420-41-003		Fig. 59			
22	115-91-422-41-003	115-93-422-41-003	115-97-422-41-003	115-99-422-41-003		Fig. 60	27.8	10.16	12.6
24	115-91-424-41-003	115-93-424-41-003	115-97-424-41-003	115-99-424-41-003		Fig. 61	30.4	10.16	12.6
28	115-91-428-41-003	115-93-428-41-003	115-97-428-41-003	115-99-428-41-003		Fig. 62	35.5	10.16	12.6
24	115-91-624-41-003	115-93-624-41-003	115-97-624-41-003	115-99-624-41-003		Fig. 63	30.4	15.24	17.7
28	115-91-628-41-003	115-93-628-41-003	115-97-628-41-003	115-99-628-41-003		Fig. 64	35.5	15.24	17.7
32	115-91-632-41-003	115-93-632-41-003	115-97-632-41-003	115-99-632-41-003		Fig. 65	40.6	15.24	17.7
36	115-91-636-41-003	115-93-636-41-003	115-97-636-41-003	115-99-636-41-003		Fig. 66	45.7	15.24	17.7
40	115-91-640-41-003	115-93-640-41-003	115-97-640-41-003	115-99-640-41-003		Fig. 67	50.6	15.24	17.7
48	115-91-648-41-003	115-93-648-41-003	115-97-648-41-003	115-99-648-41-003		Fig. 68	60.9	15.24	17.7
50	115-91-650-41-003	115-93-650-41-003	115-97-650-41-003	115-99-650-41-003		Fig. 69	63.5	15.24	17.7

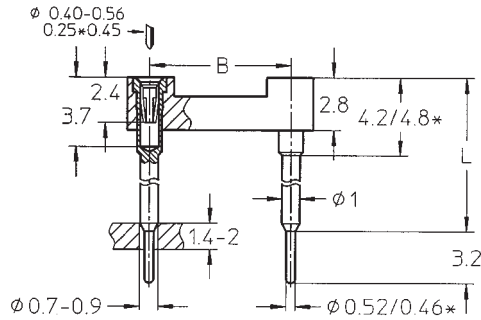




For mechanical and electrical interconnection and stacking of PCBs

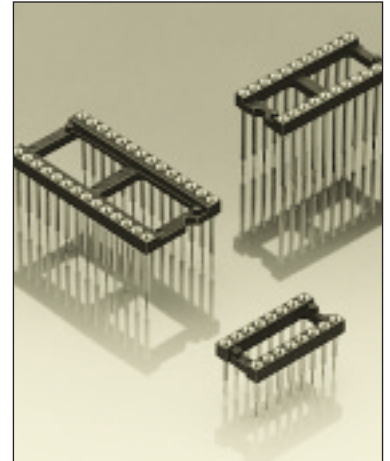Other platings and heights on request


Insertion characteristics:
4-finger standard




Platings	Sleeve 	Clip 	Pin 
93	5 µm Sn Pb	0.75 µm Au	

Ordering information

For complete part number replace **xxx** with the code given in the column corresponding to the required figure for L

No. of poles	Order Codes											Insulator dimensions				
	Plating 93															
	L =	6 mm	8 mm	9 mm	10 mm	12 mm	13 mm	15 mm	18 mm	22 mm	33 mm	See page 50	A	B	C	
10	116-93-210-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 1	12.6	5.08	7.6	
4	116-93-304-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 2	5.0	7.62	10.1	
6	116-93-306-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 3	7.6	7.62	10.1	
8	116-93-308-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 4	10.1	7.62	10.1	
10	116-93-310-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 5	12.6	7.62	10.1	
12	116-93-312-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 5a	15.2	7.62	10.1	
14	116-93-314-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 6	17.7	7.62	10.1	
16	116-93-316-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 7	20.3	7.62	10.1	
18	116-93-318-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 8	22.8	7.62	10.1	
20	116-93-320-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 9	25.3	7.62	10.1	
22	116-93-322-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 10	27.8	7.62	10.1	
24	116-93-324-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 11	30.4	7.62	10.1	
28	116-93-328-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 12	35.5	7.62	10.1	
20	116-93-420-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 12a	25.3	10.16	12.6	
22	116-93-422-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 13	27.8	10.16	12.6	
24	116-93-424-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 14	30.4	10.16	12.6	
28	116-93-428-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 15	35.5	10.16	12.6	
32	116-93-432-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 16	40.6	10.16	12.6	
10	116-93-610-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 16a	12.6	15.24	17.7	
24	116-93-624-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 17	30.4	15.24	17.7	
28	116-93-628-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 18	35.5	15.24	17.7	
32	116-93-632-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 19	40.6	15.24	17.7	
36	116-93-636-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 20	45.7	15.24	17.7	
40	116-93-640-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 21	50.6	15.24	17.7	
42	116-93-642-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 22	53.2	15.24	17.7	
48	116-93-648-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 23	60.9	15.24	17.7	
50	116-93-650-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 24	63.4	15.24	17.7	
52	116-93-652-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 25	65.9	15.24	17.7	
50	116-93-950-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 26	63.4	22.86	25.3	
52	116-93-952-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 27	65.9	22.86	25.3	
64	116-93-964-41-xxx	006	003	012	007	008	009	001	011	004	013	Fig. 28	81.1	22.86	25.3	

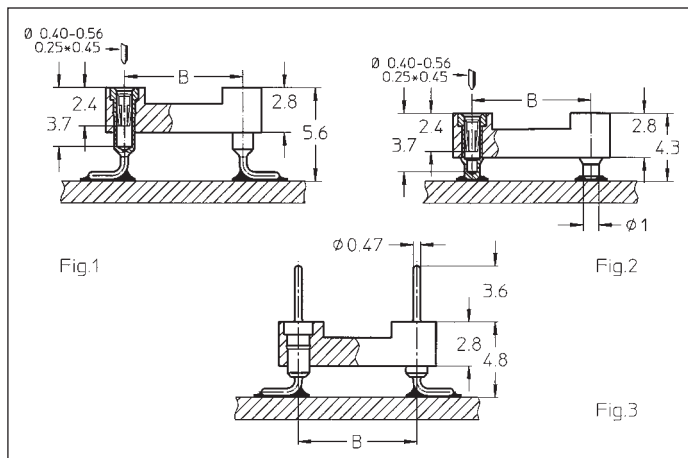





Specially designed for reflow soldering including vapor phase.

Insertion characteristics:
receptacle 4-finger
standard

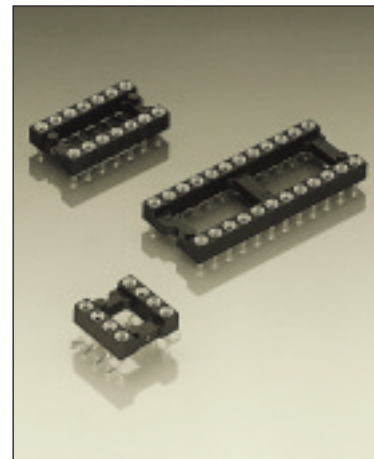New:

Pin connectors with selective plated precision screw machined pin,
plating code Z1.
Connecting side 1:
gold plated
soldering/PCB side 2:
tin plated




Platings	Sleeve 	Clip 	Pin 
91 99 90 Z1	5 µm Sn Pb 5 µm Sn Pb	0.25 µm Au 5 µm Sn Pb	5 µm Sn Pb 1: 0.25 µm Au 2: 5 µm Sn Pb

Ordering information


Replace **xx** with required plating code. Other platings on request

Series 110-xx-xxx-41-105 and 150-xx-xxx-00-106 with gull wing terminals for maximum strength and easy in-circuit test

Series 114-xx-xxx-41-117 with floating contacts compensate effects of unevenly dispensed solder paste

No. of poles	Order Codes			Insulator dimen- sions				
	Plating: see ordering information							
	Fig. 1	Fig. 2	Fig. 3		See page 50	A	B	C
10	110-xx-210-41-105	114-xx-210-41-117	150-xx-210-00-106	For PCB Layout see page 60: Fig. 4 Series 110 / 150, Fig. 5 Series 114	Fig. 1	12.6	5.08	7.6
4	110-xx-304-41-105	114-xx-304-41-117	150-xx-304-00-106		Fig. 2	5.0	7.62	10.1
6	110-xx-306-41-105	114-xx-306-41-117	150-xx-306-00-106		Fig. 3	7.6	7.62	10.1
8	110-xx-308-41-105	114-xx-308-41-117	150-xx-308-00-106		Fig. 4	10.1	7.62	10.1
10	110-xx-310-41-105	114-xx-310-41-117	150-xx-310-00-106		Fig. 5	12.6	7.62	10.1
14	110-xx-314-41-105	114-xx-314-41-117	150-xx-314-00-106		Fig. 6	17.7	7.62	10.1
16	110-xx-316-41-105	114-xx-316-41-117	150-xx-316-00-106		Fig. 7	20.3	7.62	10.1
18	110-xx-318-41-105	114-xx-318-41-117	150-xx-318-00-106		Fig. 8	22.8	7.62	10.1
20	110-xx-320-41-105	114-xx-320-41-117	150-xx-320-00-106		Fig. 9	25.3	7.62	10.1
22	110-xx-322-41-105	114-xx-322-41-117	150-xx-322-00-106		Fig. 10	27.8	7.62	10.1
24	110-xx-324-41-105	114-xx-324-41-117	150-xx-324-00-106		Fig. 11	30.4	7.62	10.18
28	110-xx-328-41-105	114-xx-328-41-117	150-xx-328-00-106		Fig. 12	35.5	7.62	10.1
22	110-xx-422-41-105	114-xx-422-41-117	150-xx-422-00-106		Fig. 13	27.8	10.16	12.6
24	110-xx-424-41-105	114-xx-424-41-117	150-xx-424-00-106		Fig. 14	30.4	10.16	12.6
28	110-xx-428-41-105	114-xx-428-41-117	150-xx-428-00-106		Fig. 15	35.5	10.16	12.6
32	110-xx-432-41-105	114-xx-432-41-117	150-xx-432-00-106		Fig. 16	40.6	10.16	12.6
24	110-xx-624-41-105	114-xx-624-41-117	150-xx-624-00-106		Fig. 17	30.4	15.24	17.7
28	110-xx-628-41-105	114-xx-628-41-117	150-xx-628-00-106		Fig. 18	35.5	15.24	17.7
32	110-xx-632-41-105	114-xx-632-41-117	150-xx-632-00-106		Fig. 19	40.6	15.24	17.7
36	110-xx-636-41-105	114-xx-636-41-117	150-xx-636-00-106		Fig. 20	45.7	15.24	17.7
40	110-xx-640-41-105	114-xx-640-41-117	150-xx-640-00-106		Fig. 21	50.6	15.24	17.7
42	110-xx-642-41-105	114-xx-642-41-117	150-xx-642-00-106		Fig. 22	53.2	15.24	17.7
48	110-xx-648-41-105	114-xx-648-41-117	150-xx-648-00-106		Fig. 23	60.9	15.24	17.7

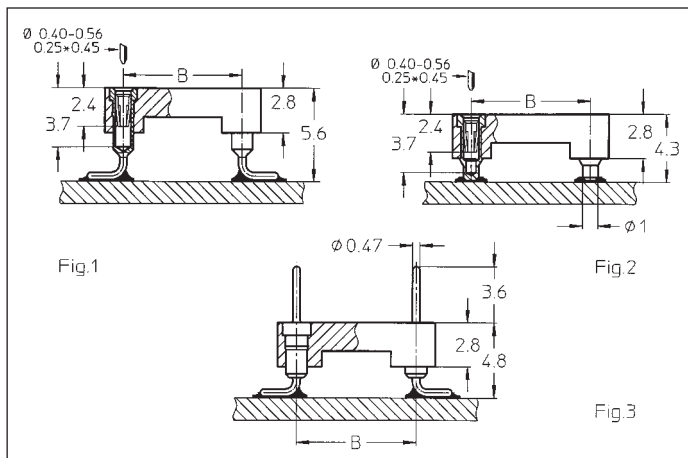For PCB Layout see page 60:
Fig. 4 Series 110 / 150,
Fig. 5 Series 114




Specially designed for re-flow soldering including vapor phase.




Insertion characteristics: receptacle 4-finger standard

New:

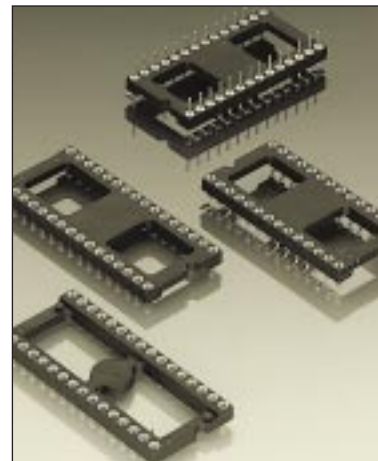Pin connectors with selective plated precision screw machined pin, plating code Z1.

Connecting side 1: gold plated
soldering/PCB side 2: tin plated




Platings	Sleeve 	Clip 	Pin 
91 90 Z1	5 µm Sn Pb	0.25 µm Au	5 µm Sn Pb 1: 0.25 µm Au 2: 5 µm Sn Pb


Ordering information

Replace **xx** with required plating code. Other platings on request


Other pin counts please consult


No. of poles	Order Codes				Insulator dimensions					
	Plating: see ordering information									
	Fig. 1 / Fig. 4	Fig. 2 / Fig. 5	Fig. 3 / Fig. 4		See	A	B	C	E	G
8	110-xx-308-41-105161	114-xx-308-41-134161	150-xx-308-00-106161		Fig. 6	10.1	7.62	10.1		10.1
14	110-xx-314-41-105161	114-xx-314-41-134161	150-xx-314-00-106161		Fig. 6	17.8	7.62	10.1		5.3
16	110-xx-316-41-105161	114-xx-316-41-134161	150-xx-316-00-106161		Fig. 6	20.3	7.62	10.1		5.3
18	110-xx-318-41-105161	114-xx-318-41-134161	150-xx-318-00-106161		Fig. 6	22.9	7.62	10.1		5.3
20	110-xx-320-41-105161	114-xx-320-41-134161	150-xx-320-00-106161		Fig. 6	25.4	7.62	10.1		8.3
24	110-xx-324-41-105161	114-xx-324-41-134161	150-xx-324-00-106161		Fig. 6	30.4	7.62	10.1		8.3
28	110-xx-328-41-105161	114-xx-328-41-134161	150-xx-328-00-106161		Fig. 6	35.6	7.62	10.1		8.3
24	110-xx-624-41-105161	114-xx-624-41-117161	150-xx-624-00-106161		Fig. 7	30.4	15.24	17.7	7	
28	110-xx-628-41-105161	114-xx-628-41-134161	150-xx-628-00-106161		Fig. 6	35.5	15.24	17.7		10
32	110-xx-632-41-105161	114-xx-632-41-134161	150-xx-632-00-106161		Fig. 6	40.6	15.24	17.7		10
40	110-xx-640-41-105161	114-xx-640-41-134161	150-xx-640-00-106161		Fig. 6	50.8	15.24	17.7		10

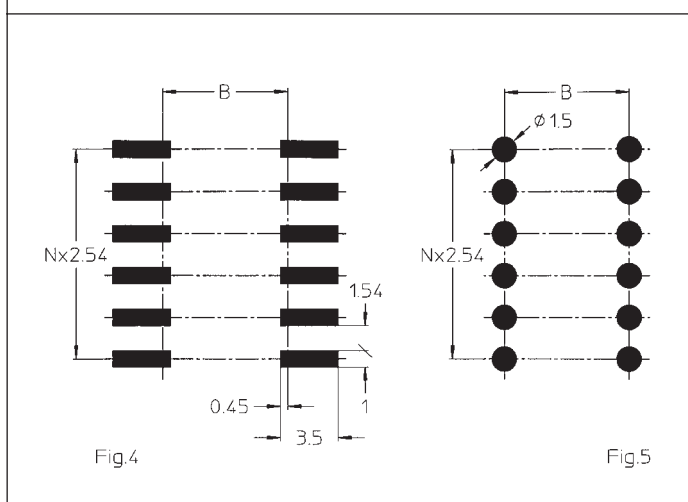PCB layout




Insulator

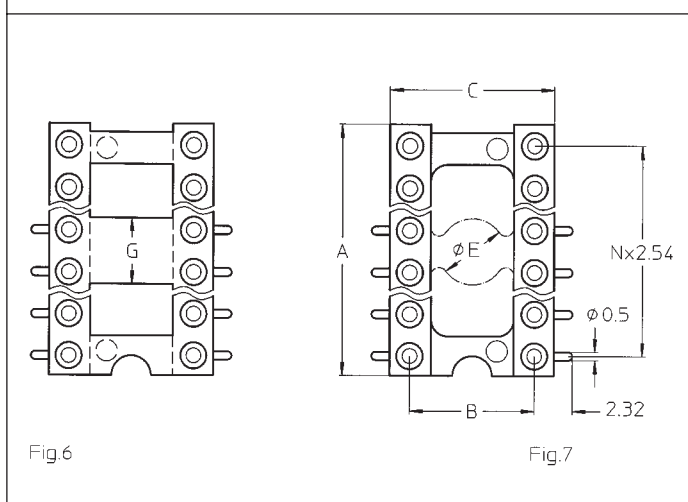

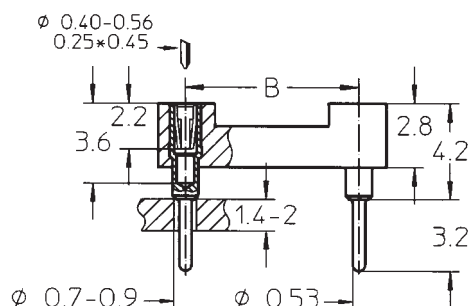



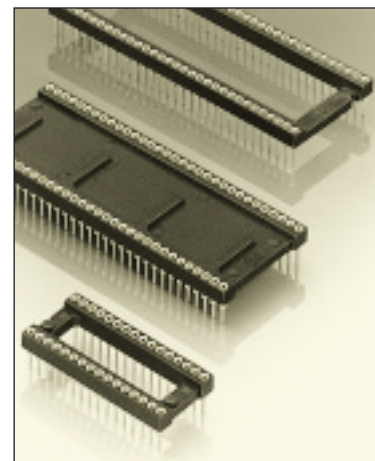
High density Dual-in-line sockets for devices featuring 0.07" (1.778 mm) lead spacing. Four-finger beryllium copper contact meets high vibration and shock requirements


Insertion characteristics:
4-finger standard




Platings	Sleeve 	Clip 	Pin 
91	5 μ m Sn Pb	0.25 μ m Au	
93	5 μ m Sn Pb	0.75 μ m Au	
97	5 μ m Sn Pb	Goldflash	
99	5 μ m Sn Pb	5 μ m Sn Pb	

Ordering information

For complete part number see Order Codes list below

No. of poles	Order Codes					Insulator dimen- sions			
	Plating 91	Plating 93	Plating 97	Plating 99 B			See page 52	A	B
	Open frame 117								
16	117-91-316-41-005	117-93-316-41-005	117-97-316-41-005	117-99-316-41-005		Fig. 70	14.6	7.62	10.16
28	117-91-428-41-005	117-93-428-41-005	117-97-428-41-005	117-99-428-41-005		Fig. 71	25.2	10.16	12.7
30	117-91-430-41-005	117-93-430-41-005	117-97-430-41-005	117-99-430-41-005		Fig. 71a	27.0	10.16	12.7
32	117-91-432-41-005	117-93-432-41-005	117-97-432-41-005	117-99-432-41-005		Fig. 71b	28.8	10.16	12.7
48	117-91-448-41-005	117-93-448-41-005	117-97-448-41-005	117-99-448-41-005		Fig. 72	43.0	10.16	12.7
20	117-91-620-41-005	117-93-620-41-005	117-97-620-41-005	117-99-620-41-005		Fig. 81	18.1	15.24	17.78
24	117-91-624-41-005	117-93-624-41-005	117-97-624-41-005	117-99-624-41-005		Fig. 82	21.55	15.24	17.64
28	117-91-628-41-005	117-93-628-41-005	117-97-628-41-005	117-99-628-41-005		Fig. 73	25.2	15.24	17.78
40	117-91-640-41-005	117-93-640-41-005	117-97-640-41-005	117-99-640-41-005		Fig. 74	35.9	15.24	17.78
42	117-91-642-41-005	117-93-642-41-005	117-97-642-41-005	117-99-642-41-005		Fig. 75	37.7	15.24	17.78
48	117-91-648-41-005	117-93-648-41-005	117-97-648-41-005	117-99-648-41-005		Fig. 76	43.1	15.24	17.78
52	117-91-652-41-005	117-93-652-41-005	117-97-652-41-005	117-99-652-41-005		Fig. 77	46.6	15.24	17.78
56	117-91-656-41-005	117-93-656-41-005	117-97-656-41-005	117-99-656-41-005		Fig. 77a	50.0	15.24	17.78
64	117-91-664-41-005	117-93-664-41-005	117-97-664-41-005	117-99-664-41-005		Fig. 78	57.2	15.24	17.78
68	117-91-668-41-005	117-93-668-41-005	117-97-668-41-005	117-99-668-41-005		Fig. 79	60.8	15.24	17.78
64	117-91-764-41-005	117-93-764-41-005	117-97-764-41-005	117-99-764-41-005		Fig. 80	57.4	19.05	21.59
	Closed frame 217								
64	217-91-764-41-005	217-93-764-41-005	217-97-764-41-005	217-99-764-41-005		Fig. 90	57.4	19.05	21.59




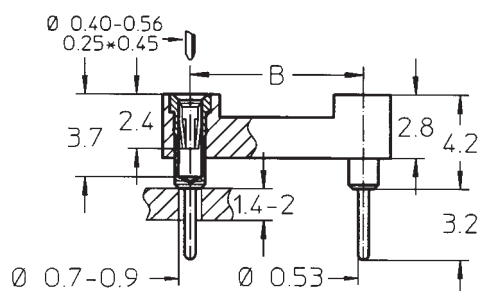




Closed frame "solid" insulator withstands high mechanical impact. Low profile

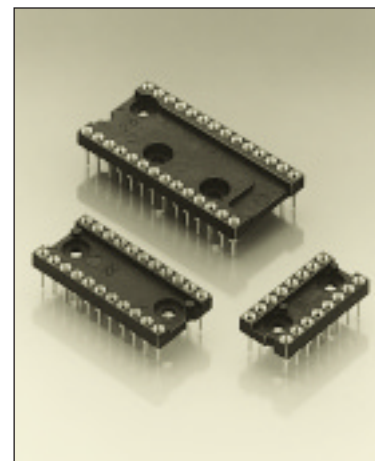Available with series 10 standard pins, other types on request


Insertion characteristics:
4-finger standard




Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
97	5 µm Sn Pb	Goldflash	
99	5 µm Sn Pb	5 µm Sn Pb	

Ordering information

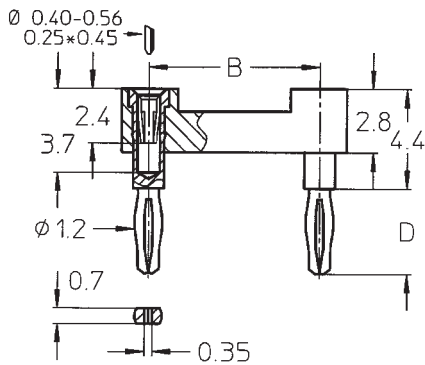
For complete part number see Order Codes list below




No. of poles	Order Codes					Insulator dimensions			
	Plating 91 B	Plating 93 B	Plating 97 B	Plating 99 B			A	B	C
						See page 51			
6	210-91-306-41-001	210-93-306-41-001	210-97-306-41-001	210-99-306-41-001		Fig. 30	7.6	7.62	10.1
8	210-91-308-41-001	210-93-308-41-001	210-97-308-41-001	210-99-308-41-001		Fig. 31	10.1	7.62	10.1
10	210-91-310-41-001	210-93-310-41-001	210-97-310-41-001	210-99-310-41-001		Fig. 32	12.6	7.62	10.1
14	210-91-314-41-001	210-93-314-41-001	210-97-314-41-001	210-99-314-41-001		Fig. 33	17.7	7.62	10.1
16	210-91-316-41-001	210-93-316-41-001	210-97-316-41-001	210-99-316-41-001		Fig. 34	20.3	7.62	10.1
18	210-91-318-41-001	210-93-318-41-001	210-97-318-41-001	210-99-318-41-001		Fig. 35	22.8	7.62	10.1
20	210-91-320-41-001	210-93-320-41-001	210-97-320-41-001	210-99-320-41-001		Fig. 36	25.3	7.62	10.1
24	210-91-324-41-001	210-93-324-41-001	210-97-324-41-001	210-99-324-41-001		Fig. 37	30.4	7.62	10.1
22	210-91-422-41-001	210-93-422-41-001	210-97-422-41-001	210-99-422-41-001		Fig. 38	27.8	10.16	12.6
24	210-91-424-41-001	210-93-424-41-001	210-97-424-41-001	210-99-424-41-001		Fig. 39	30.4	10.16	12.6
24	210-91-624-41-001	210-93-624-41-001	210-97-624-41-001	210-99-624-41-001		Fig. 40	30.4	15.24	17.7
28	210-91-628-41-001	210-93-628-41-001	210-97-628-41-001	210-99-628-41-001		Fig. 41	35.5	15.24	17.7
32	210-91-632-41-001	210-93-632-41-001	210-97-632-41-001	210-99-632-41-001		Fig. 42	40.6	15.24	17.7
36	210-91-636-41-001	210-93-636-41-001	210-97-636-41-001	210-99-636-41-001		Fig. 43	45.7	15.24	17.7
40	210-91-640-41-001	210-93-640-41-001	210-97-640-41-001	210-99-640-41-001		Fig. 44	50.6	15.24	17.7
48	210-91-648-41-001	210-93-648-41-001	210-97-648-41-001	210-99-648-41-001		Fig. 45	61.0	15.24	17.64



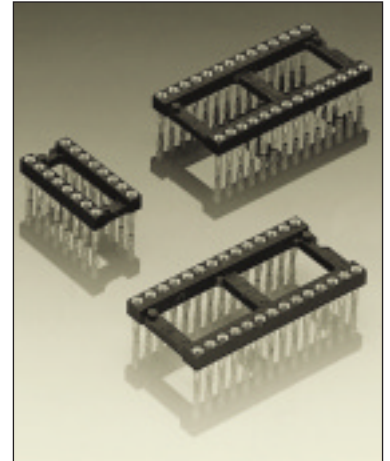Press-fit sockets for solderless mount into PCB.
For plated-thru-holes
Ø 1 (+0.09/-0.06) mm
Compliant pins

New press-fit receptacle with modified eye of the needle which eliminates damage to the plated-thru-holes



Platings	Sleeve 	Clip 	Pin 
91 93 99	5 µm Sn Pb 5 µm Sn Pb 5 µm Sn Pb	0.25 µm Au 0.75 µm Au 5 µm Sn Pb	

Ordering information


For standard versions see table (order codes)

Option:

Platings 91, 93 and 99 available for all versions

Replace **xx** with requested plating code

(Older versions 146...012/013/019 please consult)


No. of poles	Order Codes				Insulator dimensions			
	For PCB thickness 1.5 to 2.0 mm	For PCB thickness 2.1 to 3.2 mm				A	B	C
	D = 2.80 mm	D = 3.80 mm			See page 44			
6	146-xx-306-41-036	146-xx-306-41-035			Fig. 3	7.6	7.62	10.1
8	146-xx-308-41-036	146-xx-308-41-035			Fig. 4	10.1	7.62	10.1
14	146-xx-314-41-036	146-xx-314-41-035			Fig. 6	17.7	7.62	10.1
16	146-xx-316-41-036	146-xx-316-41-035			Fig. 7	20.3	7.62	10.1
18	146-xx-318-41-036	146-xx-318-41-035			Fig. 8	22.8	7.62	10.1
20	146-xx-320-41-036	146-xx-320-41-035			Fig. 9	25.3	7.62	10.1
22	146-xx-422-41-036	146-xx-422-41-035			Fig. 13	27.8	10.16	12.6
24	146-xx-624-41-036	146-xx-624-41-035			Fig. 17	30.4	15.24	17.7
28	146-xx-628-41-036	146-xx-628-41-035			Fig. 18	35.5	15.24	17.7
32	146-xx-632-41-036	146-xx-632-41-035			Fig. 19	40.6	15.24	17.7
40	146-xx-640-41-036	146-xx-640-41-035			Fig. 21	50.6	15.24	17.7

Series 612

Dual-in-line pin carrier assemblies

Open frame

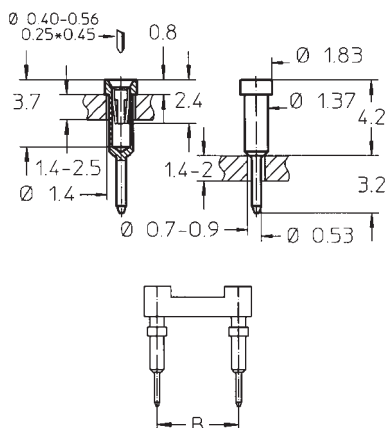
Solder tail






Pin carrier assemblies assure maximum ventilation and better visibility for inspection and repair

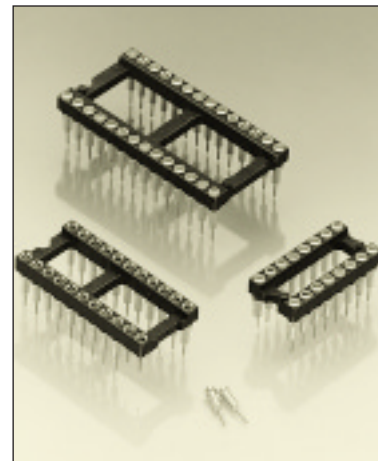Easy mounting due to the disposable plastic carrier. No solder or flux wicking problems


Insertion characteristics: 4-finger standard



Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
99	5 µm Sn Pb	5 µm Sn Pb	


Ordering information

For complete part number see Order Codes list below

No. of poles	Order Codes				Insulator dimensions			
	Plating 91	Plating 93	Plating 99			See page 50	A	B
10	612-91-210-41-001	612-93-210-41-001	612-99-210-41-001		Fig. 1	12.6	5.08	7.6
4	612-91-304-41-001	612-93-304-41-001	612-99-304-41-001		Fig. 2	5.0	7.62	10.1
6	612-91-306-41-001	612-93-306-41-001	612-99-306-41-001		Fig. 3	7.6	7.62	10.1
8	612-91-308-41-001	612-93-308-41-001	612-99-308-41-001		Fig. 4	10.1	7.62	10.1
10	612-91-310-41-001	612-93-310-41-001	612-99-310-41-001		Fig. 5	12.6	7.62	10.1
12	612-91-312-41-001	612-93-312-41-001	612-99-312-41-001		Fig. 5a	15.2	7.62	10.1
14	612-91-314-41-001	612-93-314-41-001	612-99-314-41-001		Fig. 6	17.7	7.62	10.1
16	612-91-316-41-001	612-93-316-41-001	612-99-316-41-001		Fig. 7	20.3	7.62	10.1
18	612-91-318-41-001	612-93-318-41-001	612-99-318-41-001		Fig. 8	22.8	7.62	10.1
20	612-91-320-41-001	612-93-320-41-001	612-99-320-41-001		Fig. 9	25.3	7.62	10.1
22	612-91-322-41-001	612-93-322-41-001	612-99-322-41-001		Fig. 10	27.8	7.62	10.1
24	612-91-324-41-001	612-93-324-41-001	612-99-324-41-001		Fig. 11	30.4	7.62	10.1
28	612-91-328-41-001	612-93-328-41-001	612-99-328-41-001		Fig. 12	35.5	7.62	10.1
20	612-91-420-41-001	612-93-420-41-001	612-99-420-41-001		Fig. 12a	25.3	10.16	12.6
22	612-91-422-41-001	612-93-422-41-001	612-99-422-41-001		Fig. 13	27.8	10.16	12.6
24	612-91-424-41-001	612-93-424-41-001	612-99-424-41-001		Fig. 14	30.4	10.16	12.6
28	612-91-428-41-001	612-93-428-41-001	612-99-428-41-001		Fig. 15	35.5	10.16	12.6
32	612-91-432-41-001	612-93-432-41-001	612-99-432-41-001		Fig. 16	40.6	10.16	12.6
10	612-91-610-41-001	612-93-610-41-001	612-99-610-41-001		Fig. 16a	12.6	15.24	17.7
24	612-91-624-41-001	612-93-624-41-001	612-99-624-41-001		Fig. 17	30.4	15.24	17.7
28	612-91-628-41-001	612-93-628-41-001	612-99-628-41-001		Fig. 18	35.5	15.24	17.7
32	612-91-632-41-001	612-93-632-41-001	612-99-632-41-001		Fig. 19	40.6	15.24	17.7
36	612-91-636-41-001	612-93-636-41-001	612-99-636-41-001		Fig. 20	45.7	15.24	17.7
40	612-91-640-41-001	612-93-640-41-001	612-99-640-41-001		Fig. 21	50.6	15.24	17.7
42	612-91-642-41-001	612-93-642-41-001	612-99-642-41-001		Fig. 22	53.2	15.24	17.7
48	612-91-648-41-001	612-93-648-41-001	612-99-648-41-001		Fig. 23	60.9	15.24	17.7
50	612-91-650-41-001	612-93-650-41-001	612-99-650-41-001		Fig. 24	63.4	15.24	17.7
52	612-91-652-41-001	612-93-652-41-001	612-99-652-41-001		Fig. 25	65.9	15.24	17.7
50	612-91-950-41-001	612-93-950-41-001	612-99-950-41-001		Fig. 26	63.4	22.86	25.3
52	612-91-952-41-001	612-93-952-41-001	612-99-952-41-001		Fig. 27	65.9	22.86	25.3
64	612-91-964-41-001	612-93-964-41-001	612-99-964-41-001		Fig. 28	81.1	22.86	25.3

Series 614

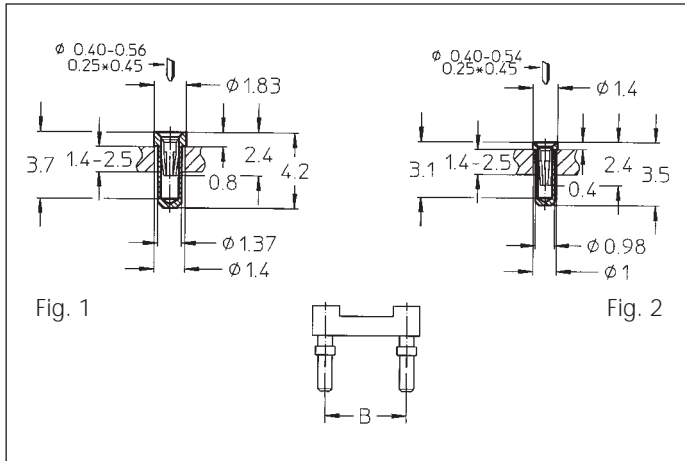Dual-in-line pin carrier assemblies
Low profile / low profile ultra thin
Solder tail







Pin carrier assemblies assure maximum ventilation and better visibility for inspection and repair

Easy mounting due to the disposable plastic carrier. No solder or flux wicking problems

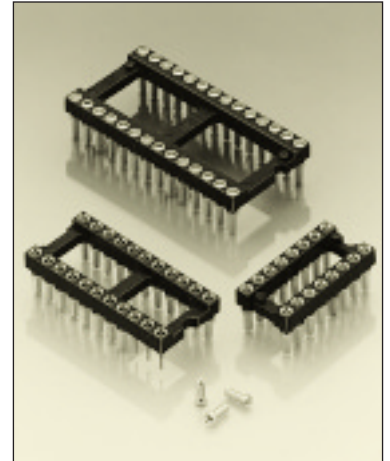Low profile:
Insertion characteristics:
4-finger standard

Low profile ultra thin:
Requires 1 mm diameter holes in PCB.
Insertion characteristics:
3-finger



Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
99	5 µm Sn Pb	5 µm Sn Pb	

Ordering information


For standard versions see table (order codes)


Platings available:

Low profile: 614...-41-001: 91, 93, 99

Ultra thin: 614...-31-012: 91, 93, 99

Replace **xx** with required plating code


No. of poles	Order Codes					Insulator dimen- sions			
	Platings: see ordering information								
	Fig. 1	Fig. 2				See page 50	A	B	C
10	614-xx-210-41-001	614-xx-210-31-012				Fig. 1	12.6	5.08	7.6
4	614-xx-304-41-001	614-xx-304-31-012				Fig. 2	5.0	7.62	10.1
6	614-xx-306-41-001	614-xx-306-31-012				Fig. 3	7.6	7.62	10.1
8	614-xx-308-41-001	614-xx-308-31-012				Fig. 4	10.1	7.62	10.1
10	614-xx-310-41-001	614-xx-310-31-012				Fig. 5	12.6	7.62	10.1
12	614-xx-312-41-001	614-xx-312-31-012				Fig. 5a	15.2	7.62	10.1
14	614-xx-314-41-001	614-xx-314-31-012				Fig. 6	17.7	7.62	10.1
16	614-xx-316-41-001	614-xx-316-31-012				Fig. 7	20.3	7.62	10.1
18	614-xx-318-41-001	614-xx-318-31-012				Fig. 8	22.8	7.62	10.1
20	614-xx-320-41-001	614-xx-320-31-012				Fig. 9	25.3	7.62	10.1
22	614-xx-322-41-001	614-xx-322-31-012				Fig. 10	27.8	7.62	10.1
24	614-xx-324-41-001	614-xx-324-31-012				Fig. 11	30.4	7.62	10.1
28	614-xx-328-41-001	614-xx-328-31-012				Fig. 12	35.5	7.62	10.1
20	614-xx-420-41-001	614-xx-420-31-012				Fig. 12a	25.3	10.16	12.6
22	614-xx-422-41-001	614-xx-422-31-012				Fig. 13	27.8	10.16	12.6
24	614-xx-424-41-001	614-xx-424-31-012				Fig. 14	30.4	10.16	12.6
28	614-xx-428-41-001	614-xx-428-31-012				Fig. 15	35.5	10.16	12.6
32	614-xx-432-41-001	614-xx-432-31-012				Fig. 16	40.6	10.16	12.6
10	614-xx-610-41-001	614-xx-610-31-012				Fig. 16a	12.6	15.24	17.7
24	614-xx-624-41-001	614-xx-624-31-012				Fig. 17	30.4	15.24	17.7
28	614-xx-628-41-001	614-xx-628-31-012				Fig. 18	35.5	15.24	17.7
32	614-xx-632-41-001	614-xx-632-31-012				Fig. 19	40.6	15.24	17.7
36	614-xx-636-41-001	614-xx-636-31-012				Fig. 20	45.7	15.24	17.7
40	614-xx-640-41-001	614-xx-640-31-012				Fig. 21	50.6	15.24	17.7
42	614-xx-642-41-001	614-xx-642-31-012				Fig. 22	53.2	15.24	17.7
48	614-xx-648-41-001	614-xx-648-31-012				Fig. 23	60.9	15.24	17.7
50	614-xx-650-41-001	614-xx-650-31-012				Fig. 24	63.4	15.24	17.7
52	614-xx-652-41-001	614-xx-652-31-012				Fig. 25	65.9	15.24	17.7
50	614-xx-950-41-001	614-xx-950-31-012				Fig. 26	63.4	22.86	25.3
52	614-xx-952-41-001	614-xx-952-31-012				Fig. 27	65.9	22.86	25.3
64	614-xx-964-41-001	614-xx-964-31-012				Fig. 28	81.1	22.86	25.3

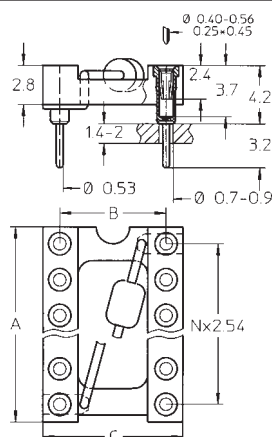




With ceramic multilayer decoupling capacitor 100 nF \pm 20% / 50 V, epoxy encapsulated

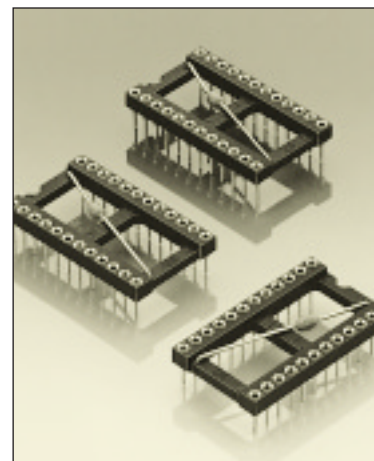Temperature range: -25°C to $+85^{\circ}\text{C}$

Insertion characteristics: 4-finger standard




Platings	Sleeve 	Clip 	Pin 
93	5 μm Sn Pb	0.75 μm Au	

Ordering information

For standard versions see table (order codes)

Option:

3 level wrapposts (please consult)

No. of poles	Order Codes					Insulator dimensions			
	Plating 93						A	B	C
8	110-93-308-41-801					Fig. 4	10.1	7.62	10.1
14	110-93-314-41-801					Fig. 6	17.7	7.62	10.1
16	110-93-316-41-801					Fig. 7	20.3	7.62	10.1
18	110-93-318-41-801					Fig. 8	22.8	7.62	10.1
20	110-93-320-41-801					Fig. 9	25.3	7.62	10.1
22	110-93-322-41-801					Fig. 10	27.8	7.62	10.1
24	110-93-324-41-801					Fig. 11	30.4	7.62	10.1
22	110-93-422-41-801					Fig. 13	27.8	10.16	12.6
24	110-93-624-41-801					Fig. 17	30.4	15.24	17.7
28	110-93-628-41-801					Fig. 18	35.5	15.24	17.7
32	110-93-632-41-801					Fig. 19	40.6	15.24	17.7
40	110-93-640-41-801					Fig. 21	50.6	15.24	17.7

NEW COMPLIANT PRESS-FIT TECHNOLOGY

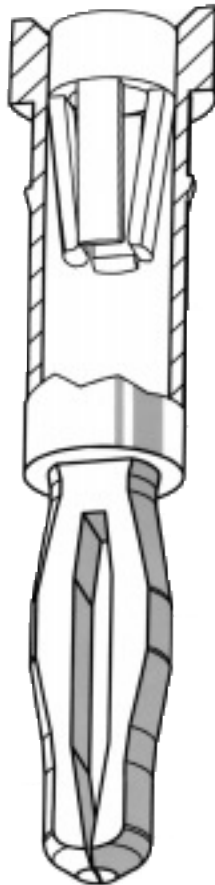
Based on an adaptation of the well known «eye-of-the-needle» principle, Preci-Dip's new compliant press-fit contact termination's introduce major improvements to this increasingly popular, cost-effective technology.

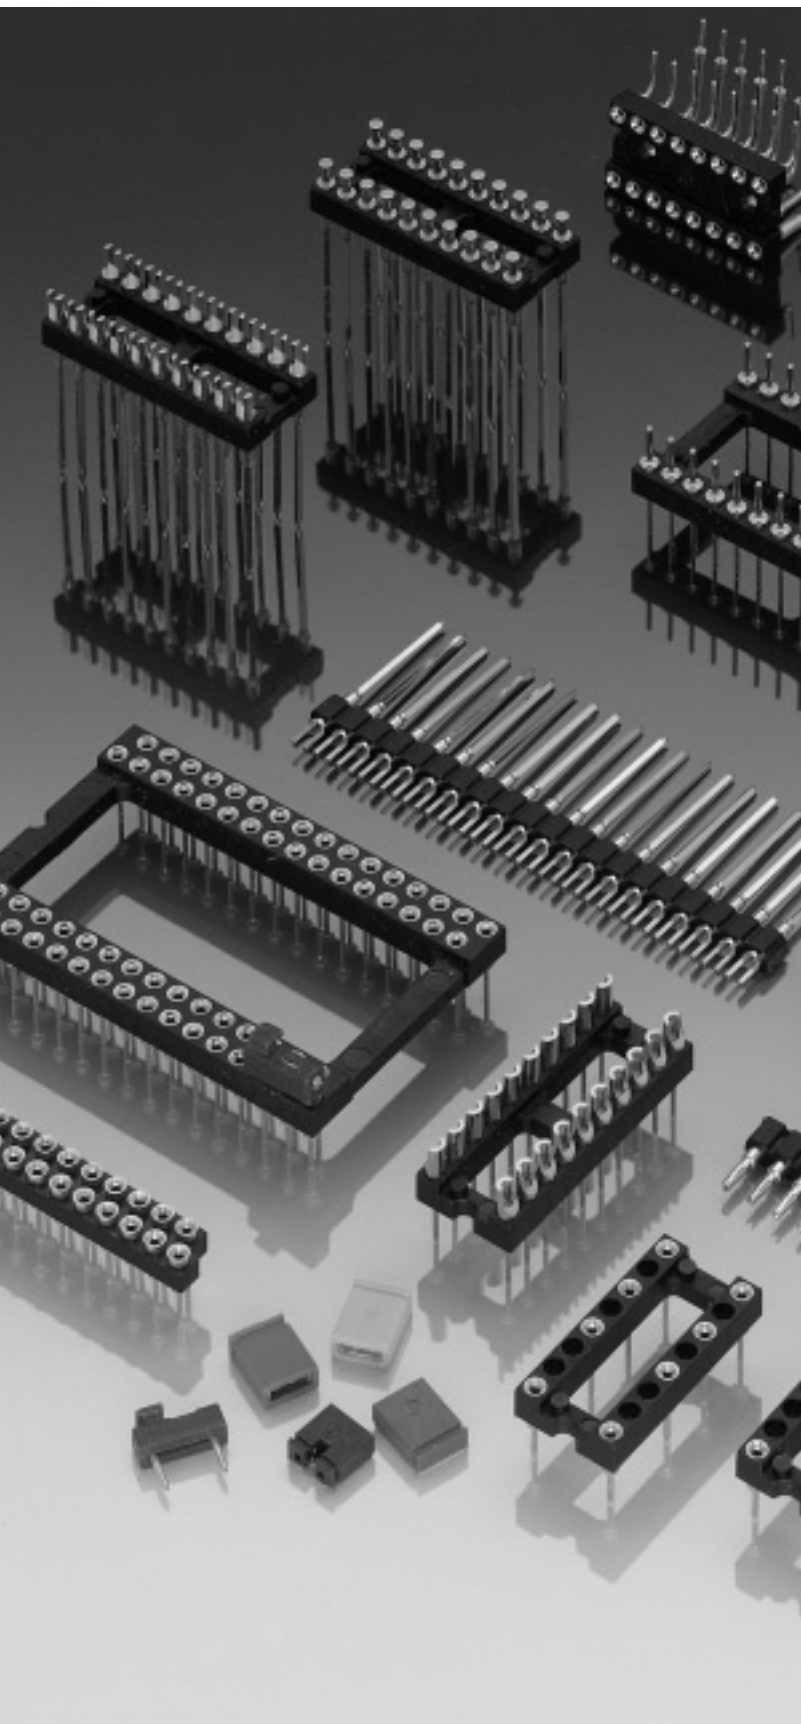
The solid, precision machined contacts are made of special bronze alloy, and have a very smooth surface with a homogeneous, carefully controlled tin protection. They fully comply with IEC 352 T5.

Thanks to the optimised geometry, Preci-Dip press-fit contacts offer a reduced insertion force without loosing specific pressure in the contact zone, making a reliable, gas-tight connection to the PCB hole metallisation, without peeling off effect. With 1.5 mm PCB the average push-in forces are about 50 N and the average push-out forces about 45 N, both measured with a 1 mm diameter hole.

The standard contacts are available for hole diameters $1 +0.09/-0.06$ mm, and PCB thickness from 1.5 to 4.5 mm. Version for smaller holes, especially suitable for reduced pitch applications like 2 mm connectors or interstitial PGAs are now available; they fit with hole dimensions $0.9 +0.07/-0.05$ mm and $0.71 +/ -0.06$ mm.

The specific manufacturing process allow us to make press-fit tails on almost all our product lines for socket contacts and pin contacts; these one are available in a selective plated version with contact body and press-fit tail tin plated and connecting pin gold plated.





Technical specifications

Materials

- Insulator: Glass filled thermoplastic polyester, self extinguishing UL 94 V-0, colour black, resistant to mineral acids, solvents, greases, oils (short time).
- Receptacle contact:
 - Sleeve: Screw-machined brass (QQ-B-626), gold or tin-lead plated (90/10) over 2–3 μm nickel
 - Clip: Stamped beryllium-copper (QQ-C-533), gold or tin-lead (90/10) plated over 2–3 μm nickel
- Pin contact: Screw-machined brass (QQ-B-626) or phosphor bronze (QQ-B-750), gold or tin-lead plated (90/10) over 2–3 μm nickel

Mechanical data

- Insertion characteristics
(measured with a polished steel gauge, typical values):
- Type of clip (finger):

4	6
standard	low force
- Gauge diameter (mm):

0.43	0.46
------	------
- Insertion force (N):

1.8	0.6
-----	-----
- Withdrawal force (N):

0.9	0.3
-----	-----
- Mechanical life: min. 100 cycles

Electrical data

- Rated current: 1 A
- Rated voltage: 100 V_{RMS} / 150 V_{DC}
- Contact resistance: 10 $\text{m}\Omega$ max.
- Insulation resistance: 10 000 $\text{M}\Omega$ min.
- Dielectric strength: 1000 V_{RMS} min.
- Air and creepage distances: 0.6 mm
- Capacitance: 0.3 pF max.

Environmental data

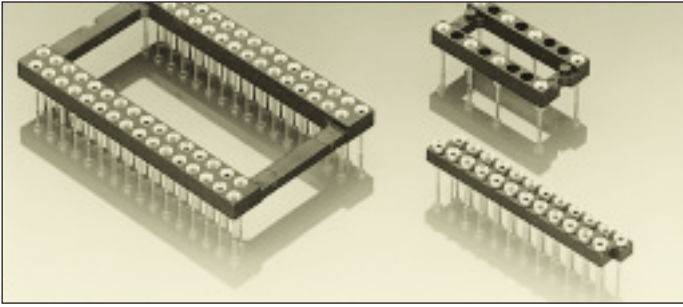
- Operating temperature: –55/+125 $^{\circ}\text{C}$
- Vibration
(10–2000 Hz, 15 g): no electrical discontinuity > 1 μs
- Shock: (50 g): no electrical discontinuity > 1 μs
- Solderability
(IEC 68-2-54 Ta): 235 $^{\circ}\text{C}$, 5 s
- Resistance to soldering heat:
(IEC 68-2-20 Tb): 260 $^{\circ}\text{C}$, 5 s
- Resistance to atmospheric corrosion: IEC 68-2-42 and 43
- Climatic category (IEC): 55/125/21

PRECI-DIP

DURTAL

Series 110 / 410 / 510

Sockets for specific applications
Solder tail



Quad-in-line sockets and staggered (zig-zag) strips are suitable for IC's with staggered double row Dual-in-line type pin patterns. (e.g. NEC, etc...).

Double row staggered strips will also accommodate single-in-line zig-zag memory packages on high density boards.

Display sockets




Insertion characteristics:


Partially equipped DIL and staggered strips: 4-finger standard

Quad-in-line and Display sockets: 6-finger low force

Ordering information

Replace 9x with required plating code, e.g. 410-9x-214-10-001 for a 5 µm Sn Pb / 0.75 µm Au becomes 410-93-214-10-001

Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
97	5 µm Sn Pb	Goldflash	
99	5 µm Sn Pb	5 µm Sn Pb	

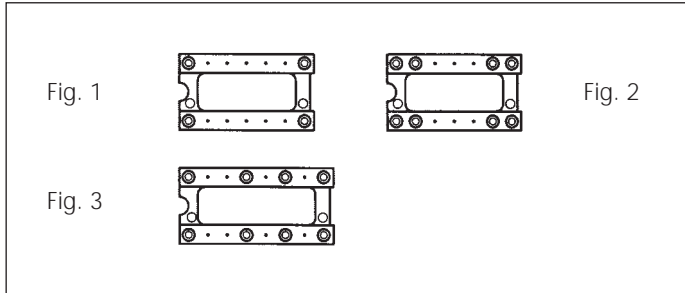

110-xx-314-10-001 fig. 1

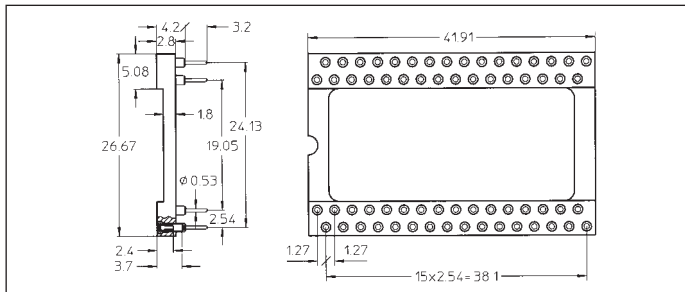
110-xx-314-10-002 fig. 2

110-xx-316-10-003 fig. 3

Partially equipped DIL sockets

Insulator body dimensions see page 50

Please consult for versions not shown



110-91-064-01-505

110-93-064-01-505

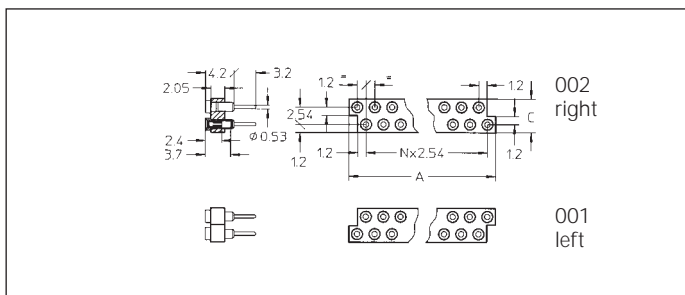
110-97-064-01-505

110-99-064-01-505

Quad-in-line socket

Rockwell packages with 2.22 mm nominal row distance can also be inserted

Important: Quad-in-line sockets require a PCB drilling pattern with 2.54 mm centerline distance



410-xx-214-10-001 left

410-xx-214-10-002 right

410-xx-216-10-001 left

410-xx-216-10-002 right

410-xx-220-10-001 left

410-xx-220-10-002 right

410-xx-224-10-001 left


410-xx-224-10-002 right

410-xx-228-10-001 left

410-xx-228-10-002 right

Staggered zig-zag strips

Not stackable	A: 18.98	C: 4.94
Not stackable	18.98	4.94
Stackable	21.52	4.94
Stackable	21.52	4.94
Stackable	26.60	4.94
Stackable	26.60	4.94
Stackable	31.68	4.94
Stackable	31.68	4.94
Stackable	36.76	4.94
Stackable	36.76	4.94

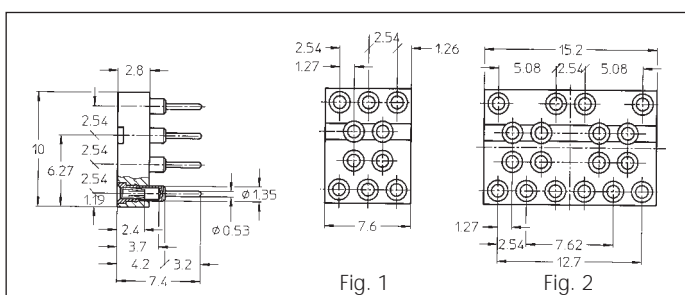

510-91-010-01-504101 Fig. 1

510-97-010-01-504101

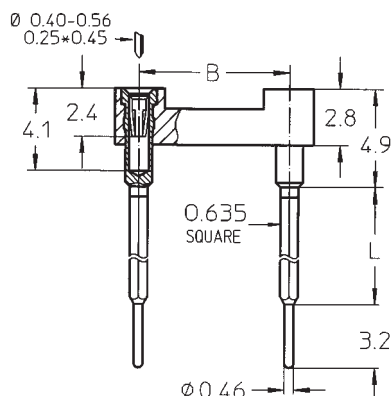
510-99-010-01-783101

510-91-018-01-504101

510-97-018-01-504101 Fig. 2

510-99-018-01-783101


Display sockets for 7 segment displays (1 or 2 digits)






This socket is equipped with contacts combining two connection techniques: up to three-level wrapping plus PCB soldering

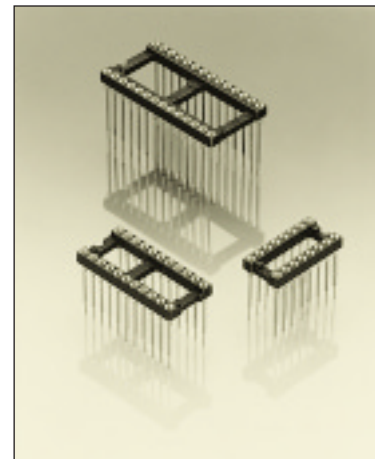Also suitable for use as an interconnect socket with intermediate wire-wrap connections. Custom lengths on request


Insertion characteristics:
4-finger standard



Platings	Sleeve 	Clip 	Pin 
93	5 µm Sn Pb	0.75 µm Au	

Ordering information

For complete part number see Order Codes list below


No. of poles	Order Codes				Insulator dimensions			
	Plating 93 B	Plating 93 B	Plating 93 B			A	B	C
	L = 5.9 1 Level	L = 8.9 2 Level	L = 11.9 3 Level		See page 50			
10	126-93-210-41-001	126-93-210-41-002	126-93-210-41-003		Fig. 1	12.6	5.08	7.6
4	126-93-304-41-001	126-93-304-41-002	126-93-304-41-003		Fig. 2	5.0	7.62	10.1
6	126-93-306-41-001	126-93-306-41-002	126-93-306-41-003		Fig. 3	7.6	7.62	10.1
8	126-93-308-41-001	126-93-308-41-002	126-93-308-41-003		Fig. 4	10.1	7.62	10.1
10	126-93-310-41-001	126-93-310-41-002	126-93-310-41-003		Fig. 5	12.6	7.62	10.1
12	126-93-312-41-001	126-93-312-41-002	126-93-312-41-003		Fig. 5a	15.2	7.62	10.1
14	126-93-314-41-001	126-93-314-41-002	126-93-314-41-003		Fig. 6	17.7	7.62	10.1
16	126-93-316-41-001	126-93-316-41-002	126-93-316-41-003		Fig. 7	20.3	7.62	10.1
18	126-93-318-41-001	126-93-318-41-002	126-93-318-41-003		Fig. 8	22.8	7.62	10.1
20	126-93-320-41-001	126-93-320-41-002	126-93-320-41-003		Fig. 9	25.3	7.62	10.1
22	126-93-322-41-001	126-93-322-41-002	126-93-322-41-003		Fig. 10	27.8	7.62	10.1
24	126-93-324-41-001	126-93-324-41-002	126-93-324-41-003		Fig. 11	30.4	7.62	10.1
28	126-93-328-41-001	126-93-328-41-002	126-93-328-41-003		Fig. 12	35.5	7.62	10.1
20	126-93-420-41-001	126-93-420-41-002	126-93-420-41-003		Fig. 12a	25.3	10.16	12.6
22	126-93-422-41-001	126-93-422-41-002	126-93-422-41-003		Fig. 13	27.8	10.16	12.6
24	126-93-424-41-001	126-93-424-41-002	126-93-424-41-003		Fig. 14	30.4	10.16	12.6
28	126-93-428-41-001	126-93-428-41-002	126-93-428-41-003		Fig. 15	35.5	10.16	12.6
32	126-93-432-41-001	126-93-432-41-002	126-93-432-41-003		Fig. 16	40.6	10.16	12.6
10	126-93-610-41-001	126-93-610-41-002	126-93-610-41-003		Fig. 16a	12.6	15.24	17.7
24	126-93-624-41-001	126-93-624-41-002	126-93-624-41-003		Fig. 17	30.4	15.24	17.7
28	126-93-628-41-001	126-93-628-41-002	126-93-628-41-003		Fig. 18	35.5	15.24	17.7
32	126-93-632-41-001	126-93-632-41-002	126-93-632-41-003		Fig. 19	40.6	15.24	17.7
36	126-93-636-41-001	126-93-636-41-002	126-93-636-41-003		Fig. 20	45.7	15.24	17.7
40	126-93-640-41-001	126-93-640-41-002	126-93-640-41-003		Fig. 21	50.6	15.24	17.7
42	126-93-642-41-001	126-93-642-41-002	126-93-642-41-003		Fig. 22	53.2	15.24	17.7
48	126-93-648-41-001	126-93-648-41-002	126-93-648-41-003		Fig. 23	60.9	15.24	17.7
50	126-93-650-41-001	126-93-650-41-002	126-93-650-41-003		Fig. 24	63.4	15.24	17.7
52	126-93-652-41-001	126-93-652-41-002	126-93-652-41-003		Fig. 25	65.9	15.24	17.7
50	126-93-950-41-001	126-93-950-41-002	126-93-950-41-003		Fig. 26	63.4	22.86	25.3
52	126-93-952-41-001	126-93-952-41-002	126-93-952-41-003		Fig. 27	65.9	22.86	25.3
64	126-93-964-41-001	126-93-964-41-002	126-93-964-41-003		Fig. 28	81.1	22.86	25.3

Series 150 / 151

Dual-in-line pin headers

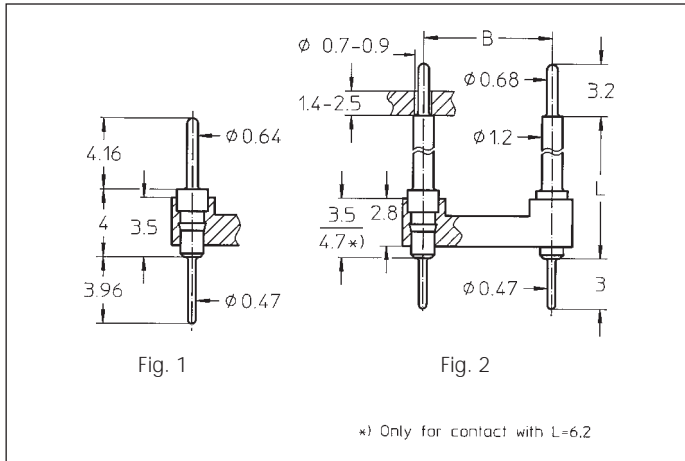
Open frame




Interconnect



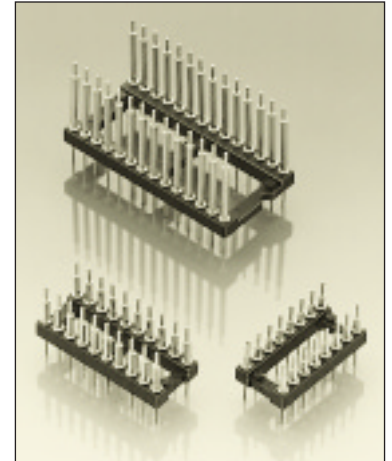Series 15X header sockets are equipped with 0.47–0.48 mm male contacts, pluggable into standard female contacts

Sockets have 0.64–0.68 mm dia. solder pin



Platings	Sleeve 	Clip 	Pin 
10 90			0.25 µm Au 5 µm Sn Pb

Ordering information

For standard versions see table (order codes)

Option:


Pin diameter 0.47 mm at both ends available with

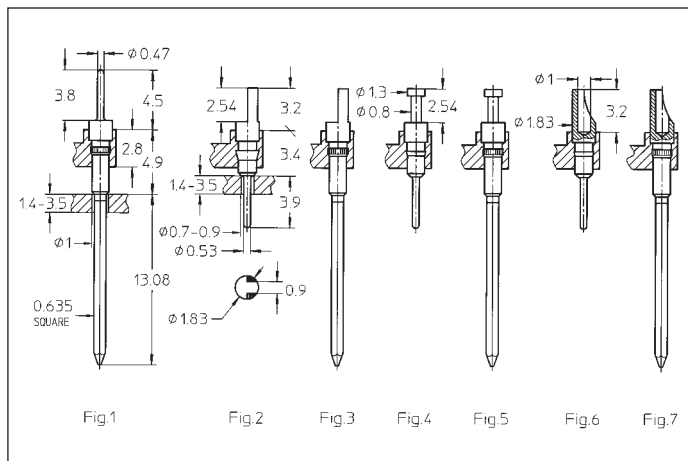
L = 6.2 mm: 151-xx-xxx-00-009

L = 8.4 mm: 151-xx-xxx-00-010

L = 15.3 mm: 151-xx-xxx-00-011


Plating: replace **xx** with requested plating code




No. of poles	Order Codes							Insulator dimen- sions				
	Platings: see ordering information											
	Fig. 1 L = 4.0 mm	Fig. 2 L =	6.2 mm B	8.4 mm B	15.3 mm B	21.2 mm B	27.4 mm B	See page 50	A	B	C	
10	150-xx-210-00-001	151-xx-210-00-xxx	003	004	005	016	017	Fig. 1	12.6	5.08	7.6	
4	150-xx-304-00-001	151-xx-304-00-xxx	003	004	005	016	017	Fig. 2	5.0	7.62	10.1	
6	150-xx-306-00-001	151-xx-306-00-xxx	003	004	005	016	017	Fig. 3	7.6	7.62	10.1	
8	150-xx-308-00-001	151-xx-308-00-xxx	003	004	005	016	017	Fig. 4	10.1	7.62	10.1	
10	150-xx-310-00-001	151-xx-310-00-xxx	003	004	005	016	017	Fig. 5	12.6	7.62	10.1	
12	150-xx-312-00-001	151-xx-312-00-xxx	003	004	005	016	017	Fig. 5a	15.2	7.62	10.1	
14	150-xx-314-00-001	151-xx-314-00-xxx	003	004	005	016	017	Fig. 6	17.7	7.62	10.1	
16	150-xx-316-00-001	151-xx-316-00-xxx	003	004	005	016	017	Fig. 7	20.3	7.62	10.1	
18	150-xx-318-00-001	151-xx-318-00-xxx	003	004	005	016	017	Fig. 8	22.8	7.62	10.1	
20	150-xx-320-00-001	151-xx-320-00-xxx	003	004	005	016	017	Fig. 9	25.3	7.62	10.1	
22	150-xx-322-00-001	151-xx-322-00-xxx	003	004	005	016	017	Fig. 10	27.8	7.62	10.1	
24	150-xx-324-00-001	151-xx-324-00-xxx	003	004	005	016	017	Fig. 11	30.4	7.62	10.1	
28	150-xx-328-00-001	151-xx-328-00-xxx	003	004	005	016	017	Fig. 12	35.5	7.62	10.1	
20	150-xx-420-00-001	151-xx-420-00-xxx	003	004	005	016	017	Fig. 12a	25.3	10.16	12.6	
22	150-xx-422-00-001	151-xx-422-00-xxx	003	004	005	016	017	Fig. 13	27.8	10.16	12.6	
24	150-xx-424-00-001	151-xx-424-00-xxx	003	004	005	016	017	Fig. 14	30.4	10.16	12.6	
28	150-xx-428-00-001	151-xx-428-00-xxx	003	004	005	016	017	Fig. 15	35.5	10.16	12.6	
32	150-xx-432-00-001	151-xx-432-00-xxx	003	004	005	016	017	Fig. 16	40.6	10.16	12.6	
10	150-xx-610-00-001	151-xx-610-00-xxx	003	004	005	016	017	Fig. 16a	12.6	15.24	17.7	
24	150-xx-624-00-001	151-xx-624-00-xxx	003	004	005	016	017	Fig. 17	30.4	15.24	17.7	
28	150-xx-628-00-001	151-xx-628-00-xxx	003	004	005	016	017	Fig. 18	35.5	15.24	17.7	
32	150-xx-632-00-001	151-xx-632-00-xxx	003	004	005	016	017	Fig. 19	40.6	15.24	17.7	
36	150-xx-636-00-001	151-xx-636-00-xxx	003	004	005	016	017	Fig. 20	45.7	15.24	17.7	
40	150-xx-640-00-001	151-xx-640-00-xxx	003	004	005	016	017	Fig. 21	50.6	15.24	17.7	
42	150-xx-642-00-001	151-xx-642-00-xxx	003	004	005	016	017	Fig. 22	53.2	15.24	17.7	
48	150-xx-648-00-001	151-xx-648-00-xxx	003	004	005	016	017	Fig. 23	60.9	15.24	17.7	
50	150-xx-650-00-001	151-xx-650-00-xxx	003	004	005	016	017	Fig. 24	63.4	15.24	17.7	
52	150-xx-652-00-001	151-xx-652-00-xxx	003	004	005	016	017	Fig. 25	65.9	15.24	17.7	
50	150-xx-950-00-001	151-xx-950-00-xxx	003	004	005	016	017	Fig. 26	63.4	22.86	25.3	
52	150-xx-952-00-001	151-xx-952-00-xxx	003	004	005	016	017	Fig. 27	65.9	22.86	25.3	
64	150-xx-964-00-001	151-xx-964-00-xxx	003	004	005	016	017	Fig. 28	81.1	22.86	25.3	



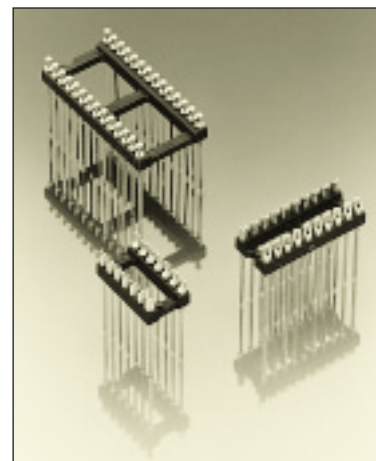Series 153 pin headers with 3 level wrappost (Pin headers with solder tail see page 72)

Series 160 / 163 with slotted heads to accept wires or component leads, series 170 / 173 with turret heads and series 180 / 183 with solder cups for wiring applications, are with solder tail or 3 level wrappost




Platings	Sleeve 	Clip 	Pin 
10 90			0.25 µm Au 5 µm Sn Pb

Ordering information

For standard versions see table (order codes)
Platings 10 and 90 available for all versions. Replace **xx** with required plating code


Option:

2 level wrapposts (please consult)

No. of poles	Order Codes								Insulator dimen- sions			
	Fig. 1 B	Fig. 2 B	Fig. 3 B	Fig. 4 B	Fig. 5 B	Fig. 6 B	Fig. 7 B			See page 50	A	B
10	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-210-00-001	Fig. 1	12.6	5.08	7.6
4	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-304-00-001	Fig. 2	5.0	7.62	10.1
6	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-306-00-001	Fig. 3	7.6	7.62	10.1
8	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-308-00-001	Fig. 4	10.1	7.62	10.1
10	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-310-00-001	Fig. 5	12.6	7.62	10.1
12	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-312-00-001	Fig. 5a	15.2	7.62	10.1
14	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-314-00-001	Fig. 6	17.7	7.62	10.1
16	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-316-00-001	Fig. 7	20.3	7.62	10.1
18	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-318-00-001	Fig. 8	22.8	7.62	10.1
20	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-320-00-001	Fig. 9	25.3	7.62	10.1
22	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-322-00-001	Fig. 10	27.8	7.62	10.1
24	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-324-00-001	Fig. 11	30.4	7.62	10.1
28	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-328-00-001	Fig. 12	35.5	7.62	10.1
20	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-420-00-001	Fig. 12a	25.3	10.16	12.6
22	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-422-00-001	Fig. 13	27.8	10.16	12.6
24	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-424-00-001	Fig. 14	30.4	10.16	12.6
28	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-428-00-001	Fig. 15	35.5	10.16	12.6
32	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-432-00-001	Fig. 16	40.6	10.16	12.6
10	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-610-00-001	Fig. 16a	12.6	15.24	17.7
24	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-624-00-001	Fig. 17	30.4	15.24	17.7
28	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-628-00-001	Fig. 18	35.5	15.24	17.7
32	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-632-00-001	Fig. 19	40.6	15.24	17.7
36	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-636-00-001	Fig. 20	45.7	15.24	17.7
40	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-640-00-001	Fig. 21	50.6	15.24	17.7
42	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-642-00-001	Fig. 22	53.2	15.24	17.7
48	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-648-00-001	Fig. 23	60.9	15.24	17.7
50	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-650-00-001	Fig. 24	63.4	15.24	17.7
52	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-652-00-001	Fig. 25	65.9	15.24	17.7
50	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-950-00-001	Fig. 26	63.4	22.86	25.3
52	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-952-00-001	Fig. 27	65.9	22.86	25.3
64	153-xx-	160-xx-	163-xx-	170-xx-	173-xx-	180-xx-	183-xx-	-964-00-001	Fig. 28	81.1	22.86	25.3

Series 353–383 / 453–483

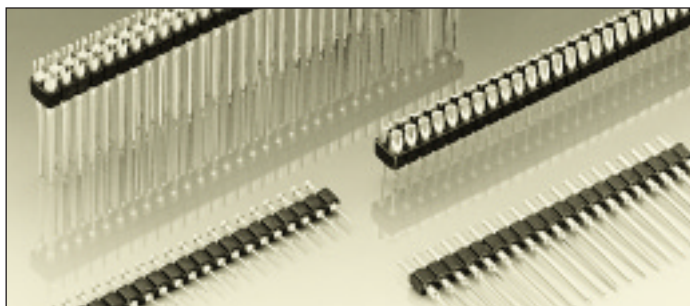PCB Header Strips
Single row / double row
Wire-wrap / solder tail






Headers

With pin / slotted / turret / solder cup head

Solder tail or wrapost


Solder tail pin \varnothing 0.53 mm

Wrapost termination \square 0.63 square

Platings	Sleeve 	Clip 	Pin 
10 90			0.25 μ m Au 5 μ m Sn Pb

Ordering information

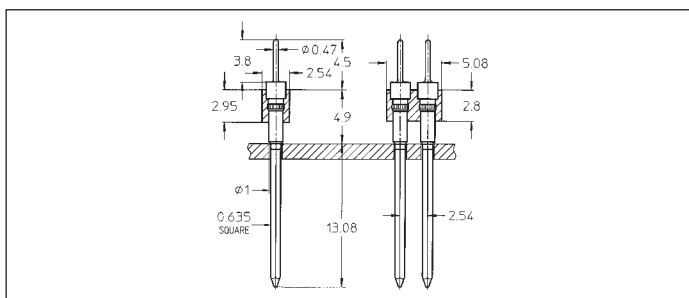Replace **xx** with the number of poles. e.g. 460-10-2**xx**-00-001
for a double row version with 8 pins per row becomes:
460-10-2**16**-00-001



353-10-1xx-00-001 **B**

353-90-1xx-00-001

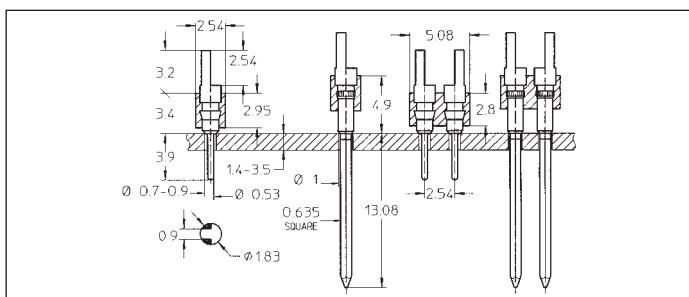
453-10-2xx-00-001 **B**

453-90-2xx-00-001

Pin header strip, wrapost, single row / double row. Solder tail see page 44

Single row, availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60 and 64

Double row, availability from 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64 and 72



360-10-1xx-00-001 **B**

360-90-1xx-00-001

363-10-1xx-00-001 **B**

363-90-1xx-00-001

460-10-2xx-00-001 **B**

460-90-2xx-00-001

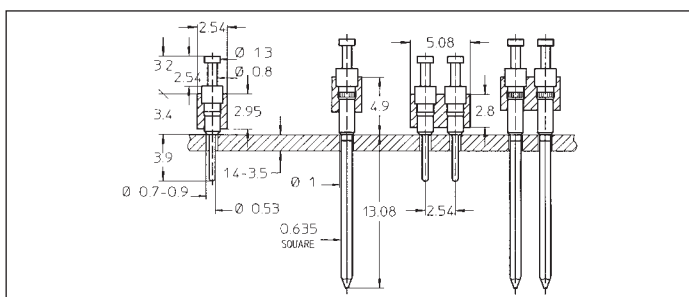
463-10-2xx-00-001 **B**

463-90-2xx-00-001

Slotted head strip, solder tail or wrapost, single row / double row

Single row, availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60 and 64

Double row, availability from 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64 and 72



370-10-1xx-00-001 **B**

370-90-1xx-00-001

373-10-1xx-00-001 **B**

373-90-1xx-00-001

470-10-2xx-00-001 **B**

470-90-2xx-00-001

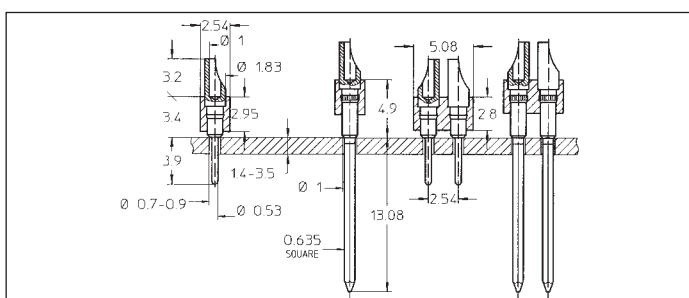
473-10-2xx-00-001 **B**

473-90-2xx-00-001

Turret head strip, solder tail or wrapost, single row / double row

Single row, availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60 and 64

Double row, availability from 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64 and 72



380-10-1xx-00-001 **B**

380-90-1xx-00-001

383-10-1xx-00-001 **B**

383-90-1xx-00-001

480-10-2xx-00-001 **B**

480-90-2xx-00-001

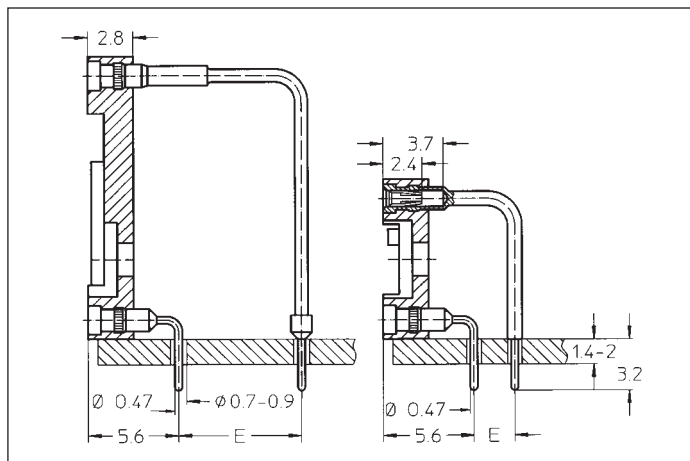
483-10-2xx-00-001 **B**

483-90-2xx-00-001

Solder cup strip, solder tail or wrapost, single row / double row

Single row, availability from: 1 to 64 contacts
Standard number of contacts 5, 6, 8, 10, 14, 16, 20, 21, 25, 30, 32, 48, 56, 60 and 64


Double row, availability from 4 to 72 contacts
Standard number of contacts 40, 44, 56, 64 and 72






Series 299 DIL sockets with closed frame insulator are designed for components to be mounted perpendicularly to the PCB, such as LED displays

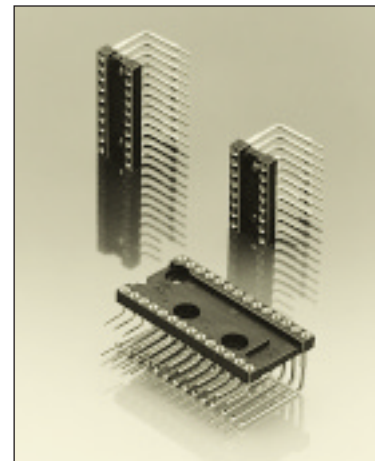Right angle solder-tails are available with either 7.62 mm (standard) or 2.54 mm row spacing


Insertion characteristics: 4-finger standard



Platings	Sleeve 	Clip 	Pin 
93 91	5 µm Sn Pb 5 µm Sn Pb	0.75 µm Au 0.25 µm Au	


Ordering information

For complete part number see Order Codes list below

No. of poles	Order Codes					Insulator dimensions			
	Plating 93 B	Plating 93 B	Plating 91 B	Plating 91 B			A	B	C
	E = 7.62	E = 2.54	E = 7.62	E = 2.54		See page 51			
6	299-93-306-10-001	299-93-306-11-001	299-91-306-10-001	299-91-306-11-001			7.6	7.62	10.1
8	299-93-308-10-001	299-93-308-11-001	299-91-308-10-001	299-91-308-11-001			10.1	7.62	10.1
10	299-93-310-10-001	299-93-310-11-001	299-91-310-10-001	299-91-310-11-001			12.6	7.62	10.1
12	299-93-312-10-001	299-93-312-11-001	299-91-312-10-001	299-91-312-11-001			15.2	7.62	10.1
14	299-93-314-10-001	299-93-314-11-001	299-91-314-10-001	299-91-314-11-001			17.7	7.62	10.1
16	299-93-316-10-001	299-93-316-11-001	299-91-316-10-001	299-91-316-11-001			20.3	7.62	10.1
18	299-93-318-10-001	299-93-318-11-001	299-91-318-10-001	299-91-318-11-001			22.8	7.62	10.1
20	299-93-320-10-001	299-93-320-11-001	299-91-320-10-001	299-91-320-11-001			25.3	7.62	10.1
24	299-93-324-10-001	299-93-324-11-001	299-91-324-10-001	299-91-324-11-001			30.4	7.62	10.1
8	299-93-608-10-002		299-91-608-10-002				10.1	15.24	17.7
10	299-93-610-10-002		299-91-610-10-002				12.6	15.24	17.7
12	299-93-612-10-002		299-91-612-10-002				15.2	15.24	17.7
14	299-93-614-10-002		299-91-614-10-002				17.7	15.24	17.7
16	299-93-616-10-002		299-91-616-10-002				20.1	15.24	17.7
18	299-93-618-10-002		299-91-618-10-002				22.8	15.24	17.7
20	299-93-620-10-002		299-91-620-10-002				25.3	15.24	17.7
22	299-93-622-10-002		299-91-622-10-002				27.8	15.24	17.7
24	299-93-624-10-002		299-91-624-10-002				30.4	15.24	17.7
26	299-93-626-10-002		299-91-626-10-002				33.0	15.24	17.7
28	299-93-628-10-002		299-91-628-10-002				35.5	15.24	17.7
30	299-93-630-10-002		299-91-630-10-002				38.0	15.24	17.7
32	299-93-632-10-002		299-91-632-10-002				40.6	15.24	17.7
36	299-93-636-10-002		299-91-636-10-002				45.7	15.24	17.7
40	299-93-640-10-002		299-91-640-10-002				50.6	15.24	17.7



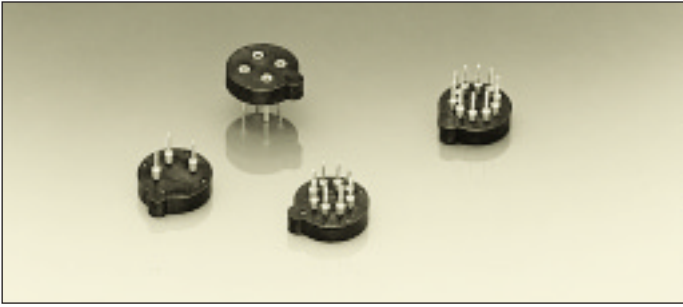
Series 917

TO sockets Solder tail




Series 917 TO package sockets exist with 3, 4, 8 and 10 contacts. Two 8 pin versions feature pin centers either on a 5.08 mm or a 5.84 mm circle

Insertion characteristics:
4-finger standard

Platings	Sleeve 	Clip 	Pin 
91 B	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
97 B	5 µm Sn Pb	Goldflash	
99 B	5 µm Sn Pb	5 µm Sn Pb	

Ordering information

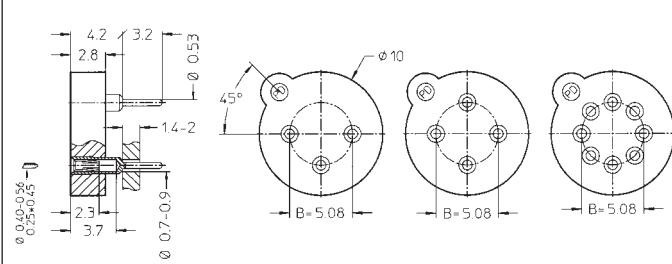
Replace **xx** with code of required plating, e.g.
917-xx-103-41-005 becomes: 917-**99**-103-41-005 with 5 µm tin on sleeve and clip



917-xx-103-41-005
917-xx-104-41-005
917-xx-108-41-005

Series 917 sockets for TO 5 package

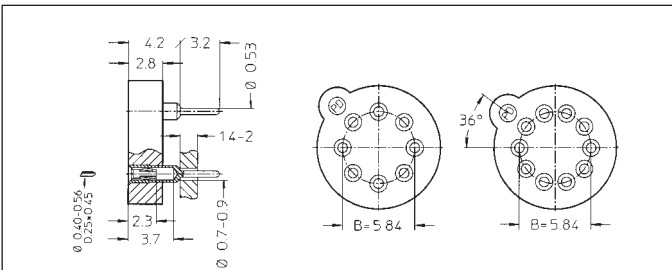Contacts arranged on 5.08 mm circle diameter



917-xx-208-41-005
917-xx-210-41-005

Series 917 sockets for TO 100 package

Contacts arranged on 5.84 mm circle diameter

Series 999

Jumpers Male or female



Series 999 jumpers are available

With insulators in various colors for easier identification




Male version will fit standard receptacles; female version with open or closed body fits square pin headers


Ordering information

Replace **xx** with required plating code
Applies to jumpers for square pin headers only

Option:

Wire dia 0.50 mm instead of 0.56 mm. Change second group of figures into 51. Example: 999-11-113-10 becomes 999-**51**-113-10. (Applies only to jumpers for receptacle connectors without insulator)


Platings	Sleeve 	Clip 	Pin 
19 39 90			0.25 µm Au* 0.75 µm Au* 5 µm Sn Pb * selective

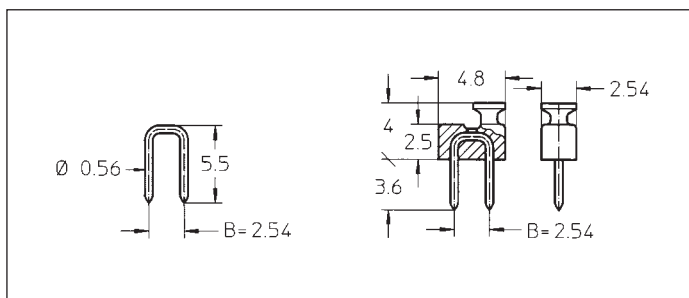

Platings:	
0.25 µm Au	5 µm Sn Pb
999-11-110-10	999-11-110-90
999-11-210-10	999-11-210-90
999-11-210-11	999-11-210-91

Jumpers for receptacle connectors. B = 2.54 mm

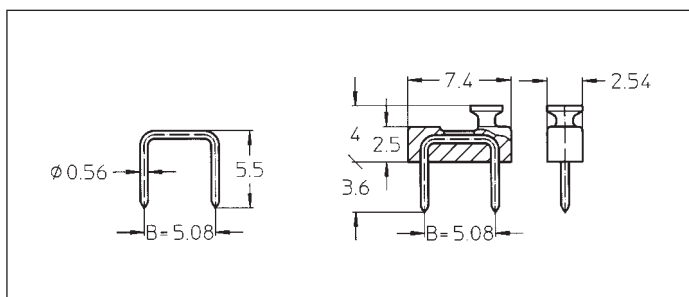
Insulator:
none
black
red



Platings:	
0.25 µm Au	5 µm Sn Pb
999-11-112-10	999-11-112-90
999-11-220-10	999-11-220-90
999-11-220-11	999-11-220-91

Jumpers for receptacle connectors. B = 5.08 mm

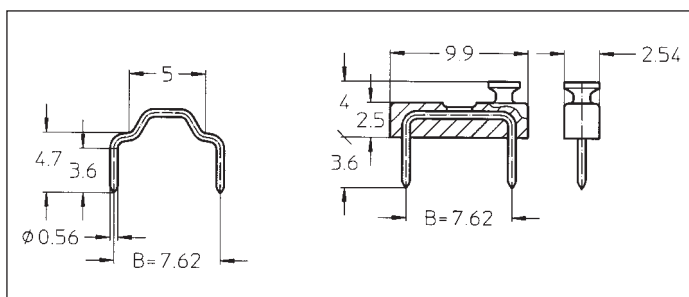
Insulator:
none
black
red



Platings:	
0.25 µm Au	5 µm Sn Pb
999-11-113-10	999-11-113-90
999-11-230-10	999-11-230-90
999-11-230-11	999-11-230-91

Jumpers for receptacle connectors. B = 7.62 mm

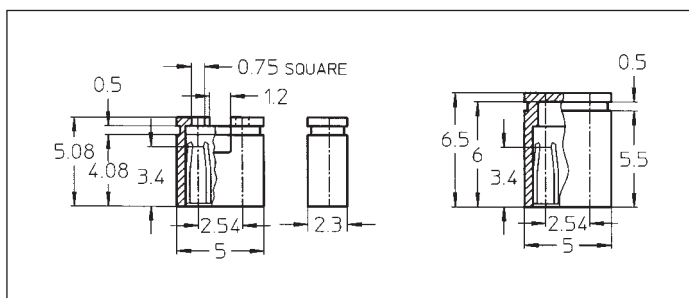Insulator:
none
black
red



Body style	
Open body	Closed body
999-xx-310-00	999-xx-210-00
999-xx-310-02	999-xx-210-02
999-xx-310-06	999-xx-210-06

Female jumpers for 2.54 mm square pin headers:

black
red
blue

NEW ADAPTER SOCKET FOR BGA COMPONENTS

The new BGA (Ball Grid Array) technology was designed for high pin count packages and direct SMT assembly on the PCB. BGA components have small tin balls instead of soldering pins and are thus suitable for direct reflow soldering on SMT circuit boards.

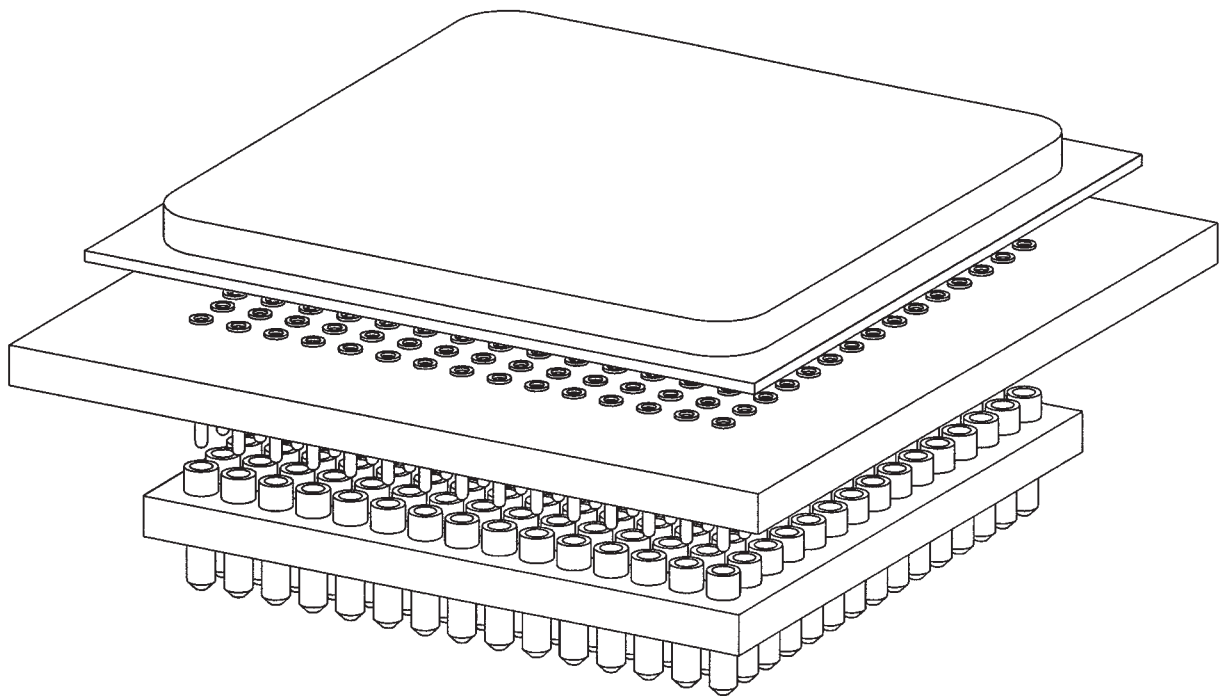
The contacts are arranged in a grid pattern with a pitch of 1.5 mm or 1.27 mm.

This type of package allows cost and dimensional reductions, but there is a soldering problem as connections in the center of the array cannot be inspected visually.

The new adapter under design at Preci-Dip consists of two parts:

1. the socket: standard type PGA socket with female contacts for soldering or SMT connections.
2. the carrier: has metal pad on one side for SMT soldering of the BGA component. On the other side male contacts allow plugging in the socket.

The design of the insulator body is adapted to the use of automatic or manual insertion/extraction equipment. Orientation and/or position marks required by automatic equipment available on request.



Technical specifications

Materials

- Insulator: Glass filled thermoplastic polyester, self extinguishing UL 94 V-0, colour black, resistant to mineral acids, solvents, greases, oils (short time).
- Receptacle contact:
 - Sleeve: Screw-machined brass (QQ-B-626), gold or tin-lead plated (90/10) over 2–3 μm nickel
 - Clip: Stamped beryllium-copper (QQ-C-533), gold or tin-lead (90/10) plated over 2–3 μm nickel
- Pin contact: Screw-machined brass (QQ-B-626) or phosphor bronze (QQ-B-750), gold or tin-lead plated (90/10) over 2–3 μm nickel

Mechanical data

- Insertion characteristics (measured with a polished steel gauge, typical values):
- Type of clip (finger): 6 6 6 3*
- Insertion characteristics: low very low ultra low low
- Gauge diameter (mm): 0.46 0.46 0.46 0.46
- Insertion force (N): 0.6 0.35 0.20 0.7
- Withdrawal force (N): 0.3 0.20 0.10 0.3
- Mechanical life: min. 100 cycles

* Series 614 only

Electrical data

- Rated current: 1 A
- Rated voltage: 100 V_{RMS} / 150 V_{DC}
- Contact resistance: 10 $\text{m}\Omega$ max.
- Insulation resistance: 10 000 $\text{M}\Omega$ min.
- Dielectric strength: 1000 V_{RMS} min. (700 for Series 517 Interstitial PGA)
- Air and creepage distances: 0.6 mm (0.3 for Series 517)
- Capacitance: 0.3 pF max. (1 for series 517)

Environmental data

- Operating temperature: –55/+125 $^{\circ}\text{C}$
- Vibration (10–2000 Hz, 15 g): no electrical discontinuity > 1 μs
- Shock: (50 g): no electrical discontinuity > 1 μs
- Solderability (IEC 68-2-54 Ta): 235 $^{\circ}\text{C}$, 5 s
- Resistance to soldering heat: 260 $^{\circ}\text{C}$, 10 s (IEC 68-2-20 Tb)
- Atmospheric corrosion: IEC 68-2-42 and 43
- Climatic category (IEC): 55/125/21

Dimensional data

Calculate with n_1 = number of contacts in one line ($5 \leq n_1 \leq 21$) and n_2 = characteristic size of the window ($3 \leq n_2 \leq 10$)

for polyester bodies

$$A = n_1 \times 2.54$$

$$B = (n_1 - 1) \times 2.54$$

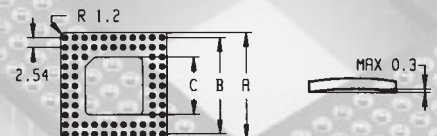
$$C = (n_2 \times 2.54) - 0.40$$

for glass-epoxy bodies

$$A = n_1 \times 2.54 + 1.27$$

$$B = (n_1 - 1) \times 2.54$$

$$C = (n_2 \times 2.54) - 0.40$$




PRECI-DIP

DURTAL

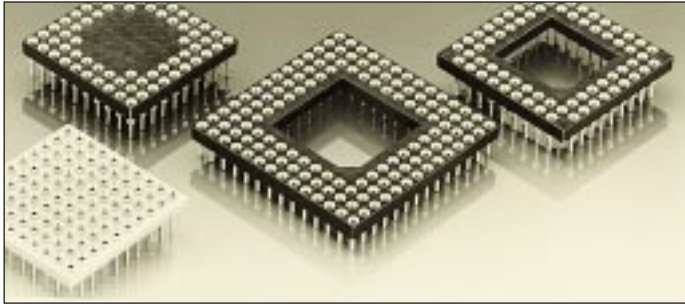Series 510 / 511 / 515




Pin grid array sockets Solder tail



Pin grid array sockets, standard solder version

PGA sockets are high density connecting devices equipped with machined precision contacts with soft contact clips assuring low insertion/withdrawal forces. Over 200 standard pinouts are available; inquiries for custom varieties are welcome


Insertion characteristics: 6-finger low, very low or ultra low force

Platings	Sleeve 	Clip 	Pin 
13	0.25 µm Au	0.75 µm Au	
91	5.0 µm Sn	0.25 µm Au	
93	5.0 µm Sn	0.75 µm Au	
97	5.0 µm Sn	Goldflash	
99	5.0 µm Sn	5.0 µm Sn	

Ordering information

Replace **xxx-xx-xxx** with the number of poles, body size and layout numbers as indicated on pages 88 to 92. For example, a 12x12 pin configuration with window and 108 standard soldering contacts as shown on page 88 becomes: 510-93-**108-12-051**-001

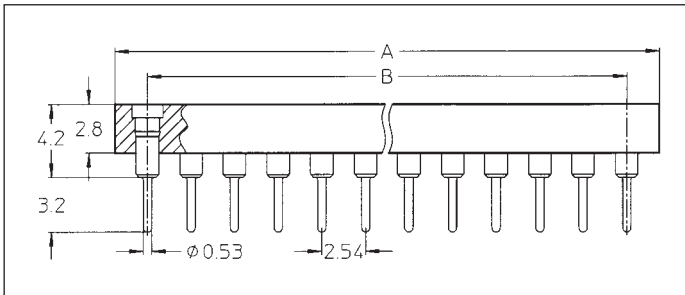Machined epoxy insulator for extra sturdiness and low profile applications; solder and wire-wrap terminations only; please consult for availability and specifications



510-13-xxx-xx-xxx-001 **B**
 510-91-xxx-xx-xxx-001
 510-93-xxx-xx-xxx-001
 510-97-xxx-xx-xxx-001
 510-99-xxx-xx-xxx-001

510-93Bxxx-xx-xxx-001 **B**
 510-97Bxxx-xx-xxx-001 **B**
 510-93Cxxx-xx-xxx-001 **B**
 510-97Cxxx-xx-xxx-001 **B**

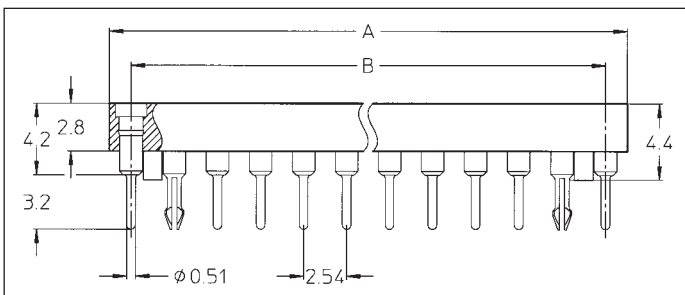
PGA sockets with standard solder tails, length 3.2 mm

Option: **B**

PGA sockets with optional stand-offs, please consult for availability

Option: **B**

PGA sockets with standard solder tail length 3.2 mm and very low force (B) or ultra low force (C) clips




510-13-xxx-xx-xxx-001 **B**
 510-91-xxx-xx-xxx-001 **B**
 510-93-xxx-xx-xxx-001 **B**
 510-97-xxx-xx-xxx-001 **B**
 510-99-xxx-xx-xxx-001 **B**

Option: **B**


PGA sockets with standard solder tails, length 3.2 mm, four optional self-clinching snap-in pins, and four optional stand-offs.

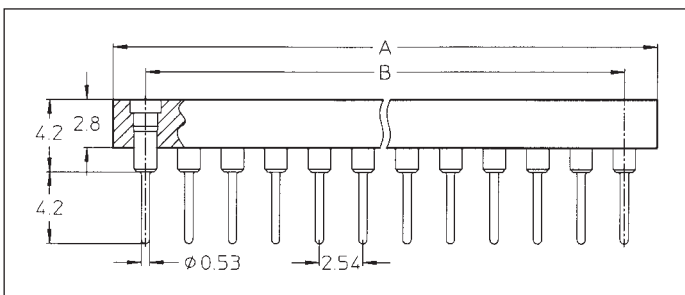Add **70** to fourth group of figures in standard reference number, e.g. 510-93-108-12-051-001 becomes: 510-93-108-**82**-051-001



511-13-xxx-xx-xxx-001 **B**
 511-91-xxx-xx-xxx-001 **B**
 511-93-xxx-xx-xxx-001 **B**
 511-97-xxx-xx-xxx-001 **B**
 511-99-xxx-xx-xxx-001 **B**

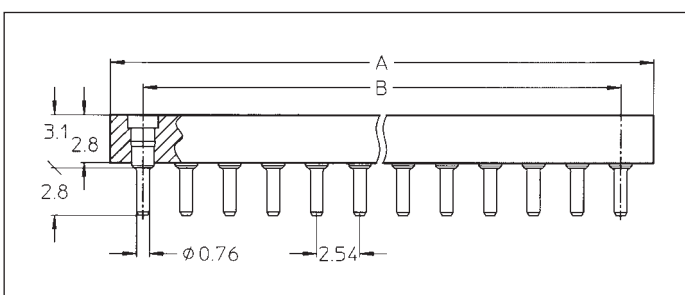
PGA sockets with standard solder tails, length 4.2 mm



515-13-xxx-xx-xxx-001 **B**
 515-91-xxx-xx-xxx-001
 515-93-xxx-xx-xxx-001
 515-97-xxx-xx-xxx-001
 515-99-xxx-xx-xxx-001

PGA sockets with low profile contacts and solder tails of 2.8 mm length

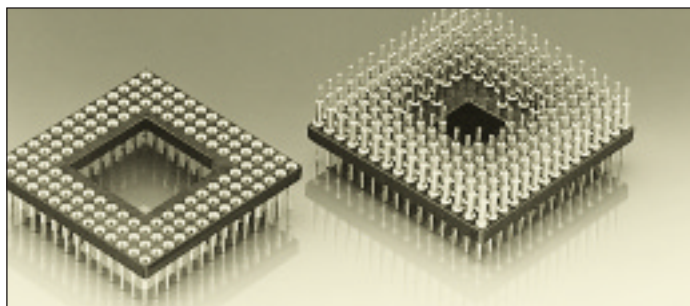PGA sockets with ultra low profile contacts please consult






Pin grid array sockets, interconnect receptacle and pin, solder tail, receptacle with wire-wrap posts

Series 516, 521, 522, 523, 550 and 551 PGA sockets are high density connecting devices equipped with machined precision male or female contacts.


Receptacles have soft contact clips assuring low insertion/withdrawal forces. Over 200 standard pinouts are available; inquiries for custom varieties are welcome

Insertion characteristics: receptacle 6-finger low force

Platings	Sleeve 	Clip 	Pin 
10 13 90 91 93 97 99	0.25 µm Au	0.75 µm Au	0.25 µm Au
	5.0 µm Sn Pb	0.25 µm Au	5.0 µm Sn Pb
	5.0 µm Sn Pb	0.75 µm Au	
	5.0 µm Sn Pb	Goldflash	
	5.0 µm Sn Pb	5.0 µm Sn Pb	


Ordering information

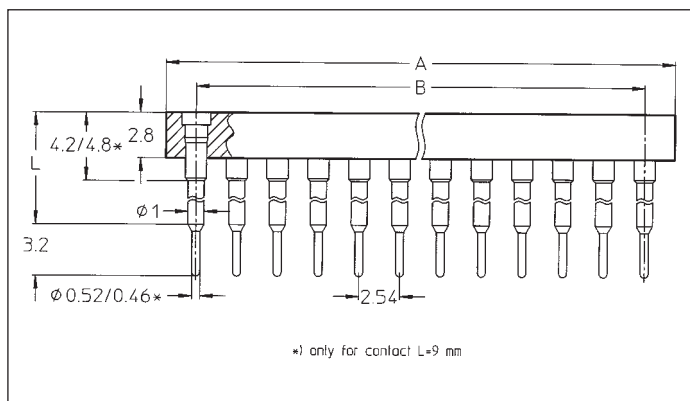Replace **xxx-xx-xxx** with the number of poles, body size and layout numbers as indicated on pages 88 to 92. For example, a 12x12 pin configuration with window and 108 interconnect contacts as shown on page 88 becomes: 516-93-**108-12-051**-003 or 551-90-**108-12-051**-003




	L =
516-93-xxx-xx-xxx-006	6 B
516-93-xxx-xx-xxx-003	8 B
516-93-xxx-xx-xxx-012	9 B
516-93-xxx-xx-xxx-007	10 B
516-93-xxx-xx-xxx-008	12 B
516-93-xxx-xx-xxx-009	13 B
516-93-xxx-xx-xxx-001	15 B
516-93-xxx-xx-xxx-011	18 B
516-93-xxx-xx-xxx-004	22 B
516-93-xxx-xx-xxx-013	33 B

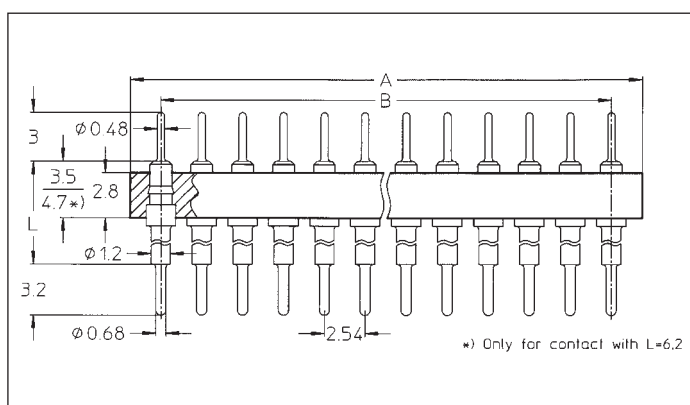PGA interconnect sockets; solder tail



	L =
550-10-xxx-xx-xxx-001	4.0 mm
550-90-xxx-xx-xxx-001	
551-10-xxx-xx-xxx-003	6.2 mm B
551-90-xxx-xx-xxx-003	
551-10-xxx-xx-xxx-004	8.4 mm B
551-90-xxx-xx-xxx-004	
551-10-xxx-xx-xxx-005	15.3 mm B
551-90-xxx-xx-xxx-005	
551-10-xxx-xx-xxx-016	21.2 mm B
551-90-xxx-xx-xxx-016	
551-10-xxx-xx-xxx-017	27.4 mm B
551-90-xxx-xx-xxx-017	

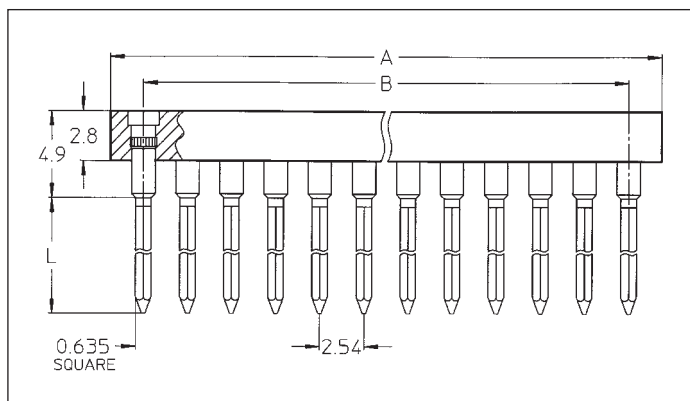PGA interconnect sockets; solder tail



52x-13-xxx-xx-xxx-001	B
52x-91-xxx-xx-xxx-001	B
52x-93-xxx-xx-xxx-001	B
52x-97-xxx-xx-xxx-001	B
52x-99-xxx-xx-xxx-001	B

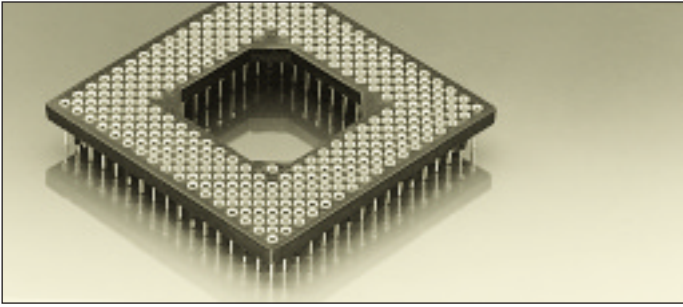
1 level L = 6.60 mm = 521-..
2 level L = 9.40 mm = 522-..
3 level L = 12.95 mm = 523-..

PGA sockets with wire-wrap terminations

Dimensions of wrapost 0.635 square

Series 517 / 614

Pin grid array sockets and carrier
with interstitial contact rows
Solder tail



Pin grid array sockets with interstitial contact rows

These sockets of a very compact design have interstitial contact rows with a staggered contact arrangement and row distances of 1.27 mm. Their contact density is nearly double as compared to PGAs based on a standard 2.54 mm grid pattern

They are equipped with machined precision contacts with extra-soft contact clips assuring low insertion/withdrawal forces




Insertion characteristics: 6-finger very low


Ordering information

Replace **xxx-xx-xxx** with number of poles, body size and layout numbers as indicated on pages 91 and 92. For example, a 18x18 pin configuration with 17x17 interstitial rows and standard soldering tails becomes: 517-93-**391-18-101**111

Options:

For other sizes and layouts please consult

Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn	0.25 µm Au	
93	5 µm Sn	0.75 µm Au	
97	5 µm Sn	Goldflash	

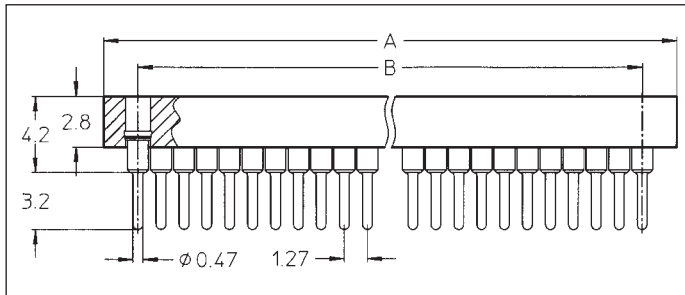


517-91-xxx-xx-xxx-111

517-93-xxx-xx-xxx-111

517-97-xxx-xx-xxx-111 **B**

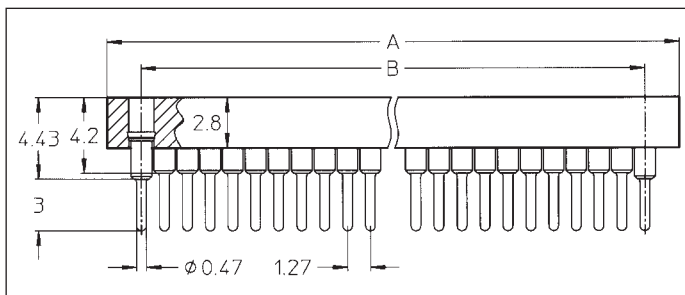PGA sockets with interstitial rows
and standard solder tails, length
3.2 mm




517-91-xxx-xx-xxx-111 **B**

517-93-xxx-xx-xxx-111 **B**

517-97-xxx-xx-xxx-111 **B**

Interstitial PGA socket with
standard solder tails and 4 ele-
vating contacts located at the
corners for better soldering and
cleaning

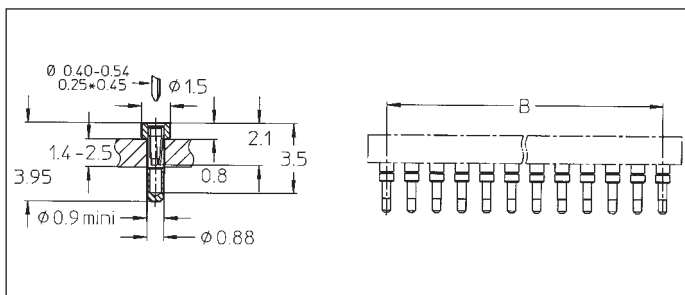Add 50 to the fourth group of
figures in standard reference
number, e.g.
517-93-391-18-101111 becomes
517-93-391-68-101111



614-91-xxx-xx-xxx-144 **B**

614-93-xxx-xx-xxx-144 **B**

614-97-xxx-xx-xxx-144 **B**

PGA carrier socket with dispos-
able plastic body and carrier pins.
Low profile ultra thin contacts are
plugged-on


Solder terminations Ø 0.88 mm
total length of contact 3.9 mm
Requires Ø min. 0.9 mm holes in
PCB

Series 546

Pin Grid Array sockets

Press-fit terminations

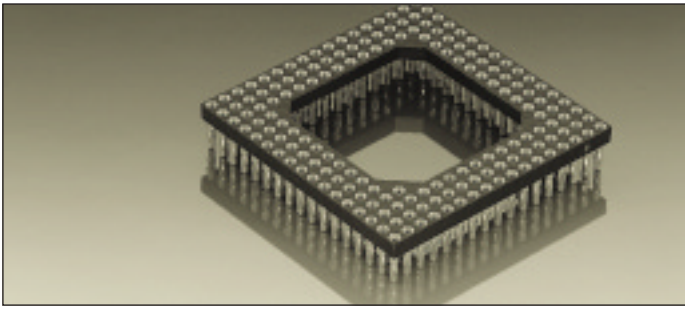83






Pin Grid Array sockets with press-fit terminations

PGA sockets are high density connecting devices equipped with machined precision contacts with soft contact clips assuring low insertion/withdrawal forces. Over 200 standard pinouts are available; inquiries for custom varieties are welcome


New compliant press-fit terminations with modified eye of the needle for solderless mount into PCBs with through plated holes guarantee gas-tight contact zones

Insertion characteristics: 6 finger low force

Platings	Sleeve 	Clip 	Pin 
91	5 µm Sn Pb	0.25 µm Au	
93	5 µm Sn Pb	0.75 µm Au	
99	5 µm Sn Pb	5 µm Sn Pb	


Ordering information

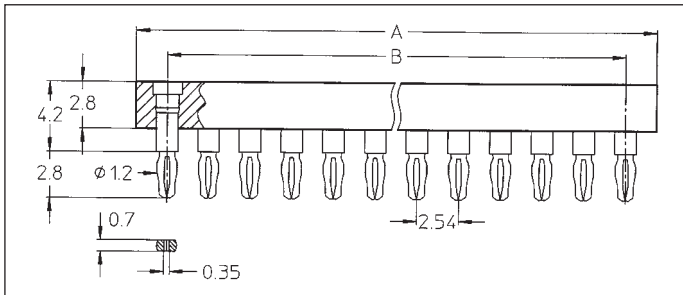Replace **xxx-xx-xxx** with the number of poles, body size and layout numbers as indicated on pages 88 to 92. For example, a 12x12 pin configuration with window and 108 standard soldering contacts as shown on page 88 becomes:
546-93-**108-12-101**-028



546-91-xxx-xx-xxx-036
546-93-xxx-xx-xxx-036
546-99-xxx-xx-xxx-036

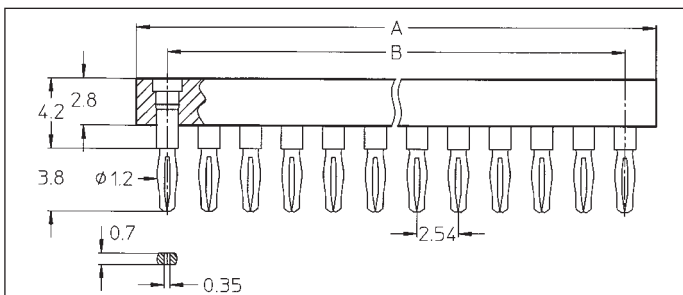PGA sockets with press-fit terminations for 1.5 to 2.0 mm PCB thickness. Hole diameter 1 (+0.09/-0.06) mm



546-91-xxx-xx-xxx-035
546-93-xxx-xx-xxx-035
546-99-xxx-xx-xxx-035

PGA sockets with press-fit terminations for 2.1 to 3.2 mm PCB thickness. Hole diameter 1 (+0.09/-0.06) mm

NEW!

Series 546 PGA sockets with press-fit terminations are now available in all standard **interstitial pinouts**.

For more details consult:

Page 68:

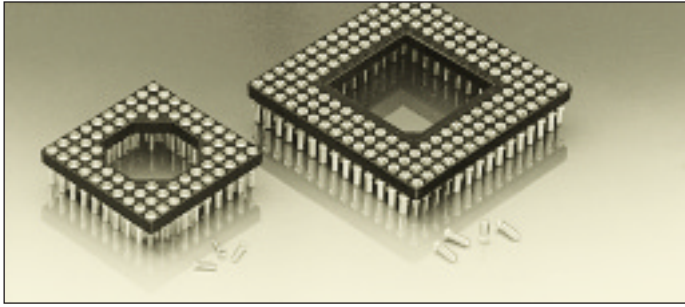
Pages 79 & 83:

Pages 91/92:

product info on press-fit technology
dimensional data
interstitial socket layouts

Series 612 / 614

Pin grid array sockets Carrier types






Pin grid array sockets, carrier types


PGA carrier sockets are high density connecting devices having a disposable plastic body equipped with carrier pins. Machined precision contacts with soft contact clips assuring low insertion/withdrawal forces are plugged-on. Over 200 standard pinouts are available; inquiries for custom varieties are welcome

Insertion characteristics: 6 finger low force or 3 finger low force for part number termination 012

Ordering information

Replace **xxx-xx-xxx** with the number of poles, body size and layout numbers as indicated on pages 88 to 92. For example, a 12x12 pin configuration with window and 108 standard soldering contacts as shown on page 88 becomes: 612-93-**108-12-051**-001.

Platings	Sleeve 	Clip 	Pin 
13	0.25 µm Au	0.75 µm Au	
91	5.0 µm Sn Pb	0.25 µm Au	
93	5.0 µm Sn Pb	0.75 µm Au	
97	5.0 µm Sn Pb	Goldflash	
99	5.0 µm Sn Pb	5.0 µm Sn Pb	

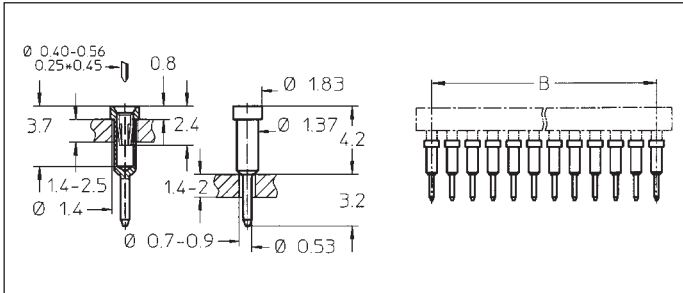

612-13-xxx-xx-xxx-101 **B**

612-91-xxx-xx-xxx-101

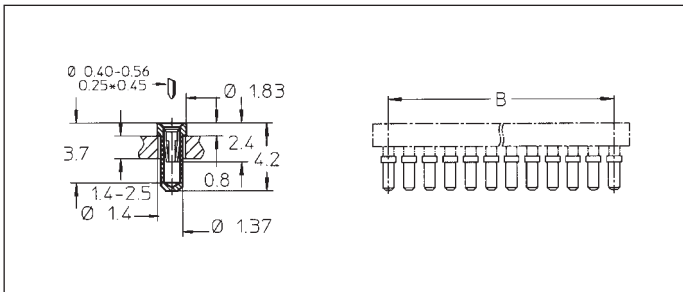
612-93-xxx-xx-xxx-101

612-97-xxx-xx-xxx-101

612-99-xxx-xx-xxx-101

PGA carrier sockets with disposable plastic body and carrier pins. Standard contacts are plugged-on

Solder terminations Ø 0.53 mm, length 3.2 mm



614-13-xxx-xx-xxx-101 **B**

614-91-xxx-xx-xxx-101

614-93-xxx-xx-xxx-101

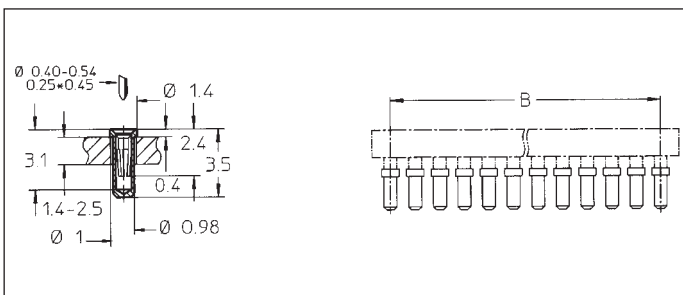
614-97-xxx-xx-xxx-101

614-99-xxx-xx-xxx-101

PGA carrier sockets with disposable plastic body and carrier pins. Low profile contacts are plugged-on

Solder terminations Ø 1.37 mm, total length of contact 4.2 mm

Requires Ø 1.4 mm holes in PCB



614-13-xxx-xx-xxx-112 **B**

614-91-xxx-xx-xxx-112

614-93-xxx-xx-xxx-112

614-97-xxx-xx-xxx-112

614-99-xxx-xx-xxx-112

PGA carrier sockets with disposable plastic body and carrier pins. Low profile ultra thin contacts are plugged-on

Solder terminations Ø 0.98 mm, total length of contact 3.5 mm

Requires Ø 1 mm holes in PCB

10	01	Solder	80
11	01	Solder	80
12	01	Carrier	84
14	01	Carrier	84
14	12	Carrier	84
15	01	Solder	80
15	03	Solder	80
16	..	Interconnect	81
17	11	Interstitial	82
2x	.1	Wire-wrap	81
46	..	Press-Fit	83
5.	..	Interconnect	81

XX XX

page:

X XX - XX X XXX - XX - XXX - 0 XX

5 Standard PGA
6 Carrier PGA

Insertion
characteristics:
– standard
B very low
C ultra low

size of window:
see pages 88 to 92
for most popular
footprints.

plating:	sleeve (pin)	clips
10	0.25 µm Au	–
13	0.25 µm Au	0.75 µm Au
90	5 µm Sn	–
91	5 µm Sn	0.25 µm Au
93	5 µm Sn	0.75 µm Au
97	5 µm Sn	Goldflash
99	5 µm Sn	5 µm Sn

total number
of pins

Size of body:

Polyester	05 5x5	06 6x6	07 7x7	08 8x8	09 9x9	10 10x10	11 11x11	12 12x12	13 13x13
	14 14x14	15 15x15	16 16x16	17 17x17	18 18x18	19 19x19	20 20x20	21 21x21	
Epoxy	35 5x5	36 6x6	37 7x7	38 8x8	39 9x9	40 10x10	41 11x11	42 12x12	43 13x13
	44 14x14	45 15x15	46 16x16	47 17x17	48 18x18	49 19x19	50 20x20	51 21x21	
Polyester and stand offs	55 5x5	56 6x6	57 7x7	58 8x8	59 9x9	60 10x10	61 11x11	62 12x12	63 13x13
	64 14x14	65 15x15	66 16x16	67 17x17	68 18x18	69 19x19	70 20x20	71 21x21	
Polyester and self clenching snap-in pins	75 5x5	76 6x6	77 7x7	78 8x8	79 9x9	80 10x10	81 11x11	82 12x12	83 13x13
	84 14x14	85 15x15	86 16x16	87 17x17	88 18x18	89 19x19	90 20x20	91 21x21	

If the desired footprint does not exist in this catalogue,
please photocopy this page, complete it and send it to your
PRECI-DIP agent.

Your address ►

Ordering information

1 Type of PGA

2 Type of pin

See opposite page

3 Plating

☐

Sleeve

☐

Contact (clips)

4 Size of body

×

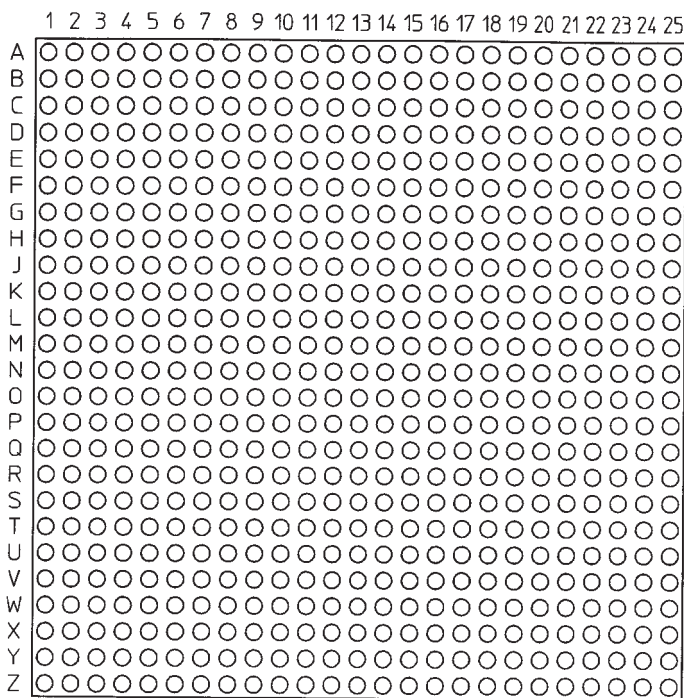
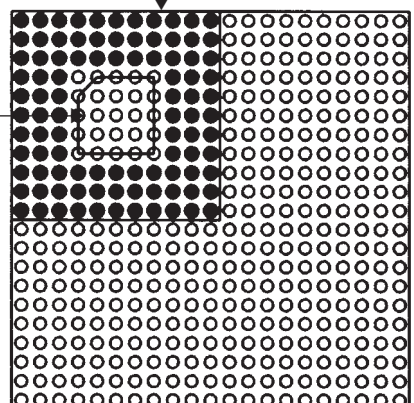
5 Semiconductor device used

6 Quantity


Example:




Fill in the
position of pins



Mark of the window

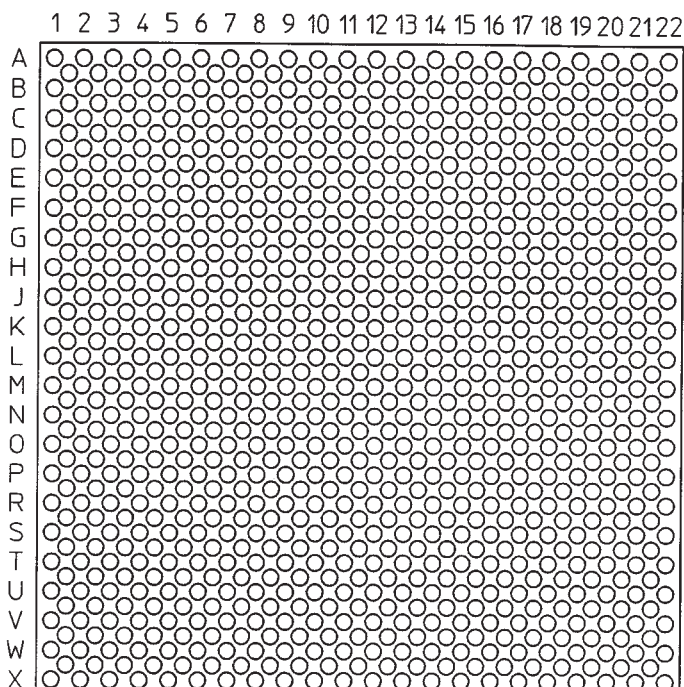













Top view












					TOP VIEW
5x5		6x6		7x7	
xxx-xx-022-05-001		xxx-xx-036-06-000		xxx-xx-049-07-000	







					
8x8		9x9			
xxx-xx-064-08-000		xxx-xx-081-09-000			



					
10x10	10x10	10x10	10x10	10x10	10x10
xxx-xx-037-10-061	xxx-xx-064-10-051	xxx-xx-068-10-061	xxx-xx-084-10-031	xxx-xx-085-10-031	xxx-xx-100-10-000





					
11x11	11x11	11x11	11x11	11x11	11x11
xxx-xx-068-11-061	xxx-xx-069-11-061	xxx-xx-084-11-042	xxx-xx-085-11-041	xxx-xx-085-11-045	xxx-xx-121-11-000







					
12x12	12x12	12x12			
xxx-xx-089-12-051	xxx-xx-108-12-051	xxx-xx-144-12-000			


					
13x13	13x13	13x13	13x13	13x13	13x13
xxx-xx-084-13-081	xxx-xx-088-13-062	xxx-xx-088-13-081	xxx-xx-100-13-063	xxx-xx-101-13-061	xxx-xx-114-13-061





					
13×13	13×13	13×13	13×13	13×13	13×13
xxx-xx-114-13-062	xxx-xx-120-13-061	xxx-xx-121-13-061	xxx-xx-124-13-041	xxx-xx-128-13-041	xxx-xx-132-13-041







					TOP VIEW
13×13	13×13				
xxx-xx-133-13-041	xxx-xx-169-13-000				


					
14×14	14×14	14×14	14×14		
xxx-xx-132-14-071	xxx-xx-133-14-071	xxx-xx-135-14-051	xxx-xx-196-14-000		







					
15×15	15×15	15×15	15×15	15×15	15×15
xxx-xx-144-15-081	xxx-xx-145-15-081	xxx-xx-149-15-063	xxx-xx-160-15-061	xxx-xx-176-15-061	xxx-xx-181-15-051


					
15×15					
xxx-xx-225-15-000					





					
16×16	16×16	16×16	16×16		
xxx-xx-156-16-091	xxx-xx-160-16-071	xxx-xx-175-16-072	xxx-xx-256-16-000		






					
17×17	17×17	17×17	17×17	17×17	17×17
xxx-xx-168-17-101	xxx-xx-169-17-101	xxx-xx-192-17-081	xxx-xx-207-17-081	xxx-xx-207-17-082	xxx-xx-209-17-081




					TOP VIEW
17×17					
xxx-xx-289-17-000					





					
18×18	18×18	18×18	18×18	18×18	18×18
xxx-xx-179-18-111	xxx-xx-179-18-112	xxx-xx-191-18-091	xxx-xx-223-18-091	xxx-xx-225-18-091	xxx-xx-241-18-071







					
18×18					
xxx-xx-324-18-000					



					
19×19	19×19	19×19	19×19		
xxx-xx-238-19-101	xxx-xx-280-19-081	xxx-xx-281-19-081	xxx-xx-361-19-000		







					
20×20	20×20	20×20		21×21	21×21
xxx-xx-257-20-111	xxx-xx-299-20-091	xxx-xx-400-20-000		xxx-xx-273-21-121	xxx-xx-441-21-000






					TOP VIEW
14x14	14x14	14x14			
517-xx-183-14-091-111	517-xx-304-14-051-111	517-xx-365-14-000-111			









					
17x17	17x17	17x17	17x17		
517-xx-321-17-101-111	517-xx-364-17-091-111	517-xx-365-17-091-111	517-xx-545-17-000-111		

					
18x18	18x18	18x18	18x18	18x18	18x18
517-xx-280-18-101-111	517-xx-293-18-101-111	517-xx-305-18-101-111	517-xx-325-18-111-111	517-xx-361-18-101-111	517-xx-369-18-091-111

					
18x18	18x18				
517-xx-391-18-101-111	517-xx-431-18-091-111				

					
19x19	19x19	19x19	19x19	19x19	19x19
517-xx-296-19-131-111	517-xx-320-19-131-111	517-xx-321-19-121-111	517-xx-372-19-111-111	517-xx-401-19-101-111	517-xx-403-19-111-111

					
19x19	19x19	19x19	19x19	19x19	
517-xx-419-19-111-111	517-xx-420-19-111-111	517-xx-428-19-101-111	517-xx-429-19-101-111	517-xx-463-19-101-111	

					TOP VIEW
20x20	20x20				
517-xx-447-20-121-111	517-xx-557-20-091-111				
					
21x21	21x21				
517-xx-528-21-121-111	517-xx-529-21-121-111				
					
22x22	22x22				
517-xx-503-22-131-111	517-xx-559-22-131-111				
					
24x24					
517-xx-599-54-131-111					
					
rectangular					
517-xx-387-01-016-119					

Chip carrier sockets for PLCC

93

Technical specifications

Series

540

504

Materials

- Insulator: Glass filled thermoplastic, self extinguishing UL 94 V-0,
- Contact: Plated Copper alloy overall nickel underplating, finish:

active contact area	tin/lead	tin/lead
termination area	tin/lead	tin/lead

Mechanical data

- Contact pressure (per contact) (N min.):

1.5	1.2
-----	-----
- Mechanical life (cycles):

50	25
----	----

Electrical data

- Rated current (A):

SMD types	1	–
Thru-hole types	2	1
- Contact resistance: 20 m Ω max.
- Insulation resistance: 5000 M Ω min.
- Dielectric strength: 600 V_{RMS} min.
- Capacitance: 2 pF max.

Environmental data


- Operating temperature: –55/+125 °C
- Vibration (10–2000 Hz, 15 g): no electrical discontinuity > 1 μ s
- Climatic category (IEC): 55/85/21

PRECI-DIP

DURTAL

Series 540

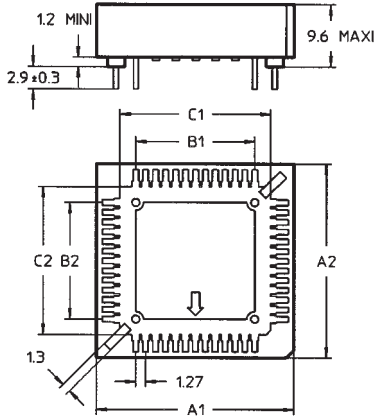
Sockets for Plastic Leaded Chip Carriers
(PLCC)
Solder tail



Series 540 PLCC sockets are designed to accept JEDEC type leaded plastic substrates

The insulator body has polarizing features for both substrate and PCB insertion

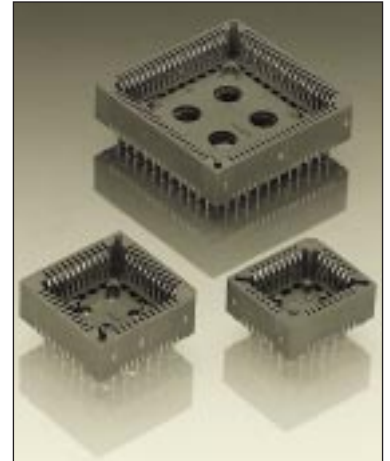Contacts of highly reliable design guarantee safe component retention thanks to positive spring action



Plating	Stamped contacts
99	tin-lead over nickel Please note: 99 is only plating available for this product.


Ordering information

For standard part numbers, please refer to table "Order Codes"

For PCB hole patterns see below


No. of poles	Order Codes	Dimensions					
		A ₁	A ₂	B ₁	B ₂	C ₁	C ₂
20	540-99-020-24-000-1	14.98	14.98	5.08	5.08	9.14	9.14
28	540-99-028-24-000-1	17.52	17.52	7.62	7.62	11.68	11.68
32*	540-99-032-24-000-1	17.52	20.06	7.62	10.16	11.78	14.32
44	540-99-044-24-000-1	22.60	22.60	12.70	12.70	16.76	16.76
52	540-99-052-24-000-1	25.15	25.15	15.24	15.24	19.30	19.30
68	540-99-068-24-000-1	30.22	30.22	20.32	20.32	24.38	24.38
84	540-99-084-24-000-1	35.31	35.31	25.40	25.40	29.46	29.46
	* rectangular						

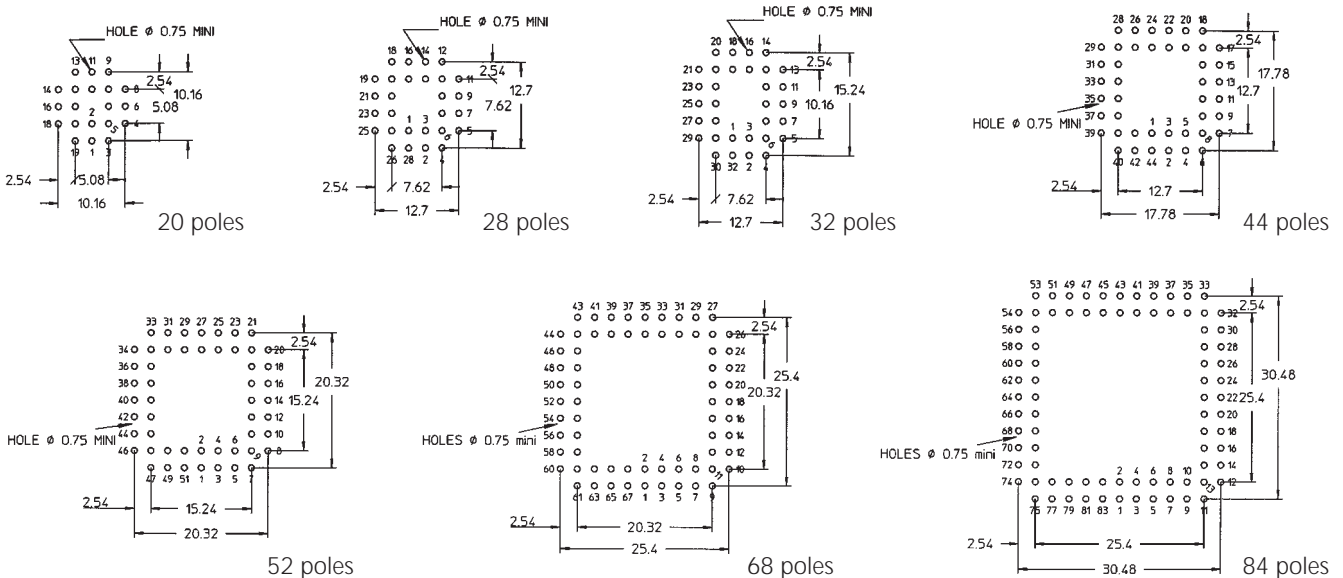PCB hole patterns thru-hole types Series 540 / 504



Series 540

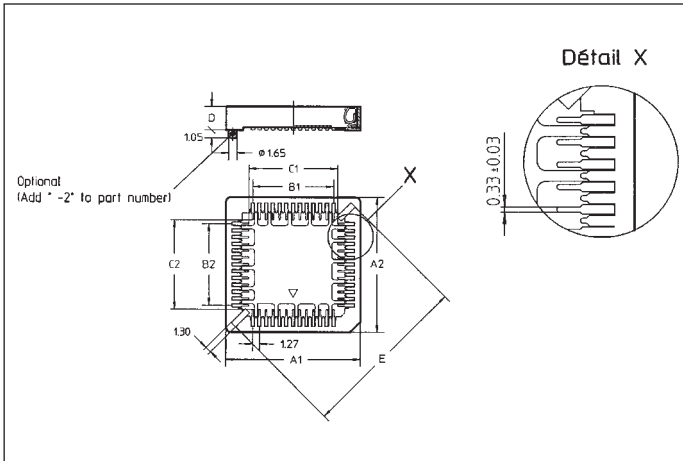
Sockets for Plastic Leaded Chip Carriers
(PLCC)
SMT terminations



Series 540 PLCC sockets with SMT terminations come with square sizes for IC-packages according to JEDEC MO-047, rectangular size (32) according to JEDEC MO-052 = low profile

Solder tail width 0.33 mm

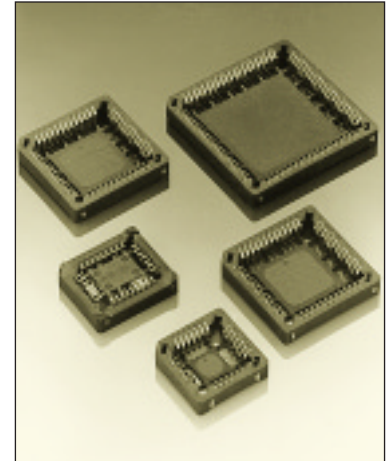Guaranteed coplanarity tolerance of SMT terminations max. 0.10 mm



Plating	Stamped contacts
99	tin-lead over nickel Please note: 99 is only plating available for this product.

Ordering information

Please refer to table Order Codes

Standard packaging: tube


Packaging options:


Tape on reel (add suffix TR, ex 540-99-020-17-400-TR)

For PCB layout see below

No. of poles	Order Codes		Dimensions							
	Standard parts:	Parts with 2 positioning pegs:	A ₁	A ₂	B ₁	B ₂	C ₁	C ₂	D	E
20	540-99-020-17-400	540-99-020-17-400-2	14.86	14.86	5.08	5.08	7.26	7.26	4.60	16.00
28	540-99-028-17-400	540-99-028-17-400-2	17.40	17.40	7.62	7.62	9.80	9.80	4.60	19.70
32*	540-99-032-17-400	540-99-032-17-400-2	16.90	19.45	7.62	10.16	9.61	12.16	3.90	22.00
44	540-99-044-17-400	540-99-044-17-400-2	22.48	22.48	12.70	12.70	14.88	14.88	4.60	27.00
52	540-99-052-17-400	540-99-052-17-400-2	25.40	25.40	15.24	15.24	17.50	17.50	4.60	30.80
68	540-99-068-17-400	540-99-068-17-400-2	30.54	30.54	20.32	20.32	22.50	22.50	4.60	37.65
84	540-99-084-17-400	540-99-084-17-400-2	35.56	35.56	25.40	25.40	27.62	27.62	4.60	45.10
	* rectangular									

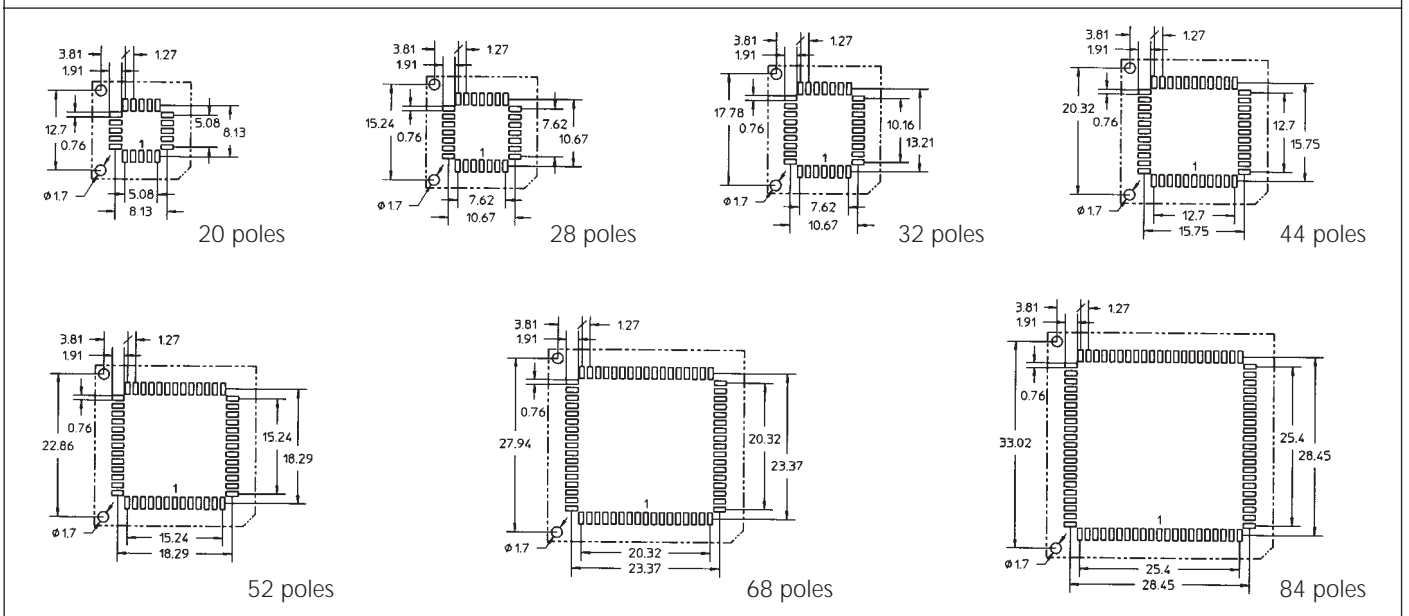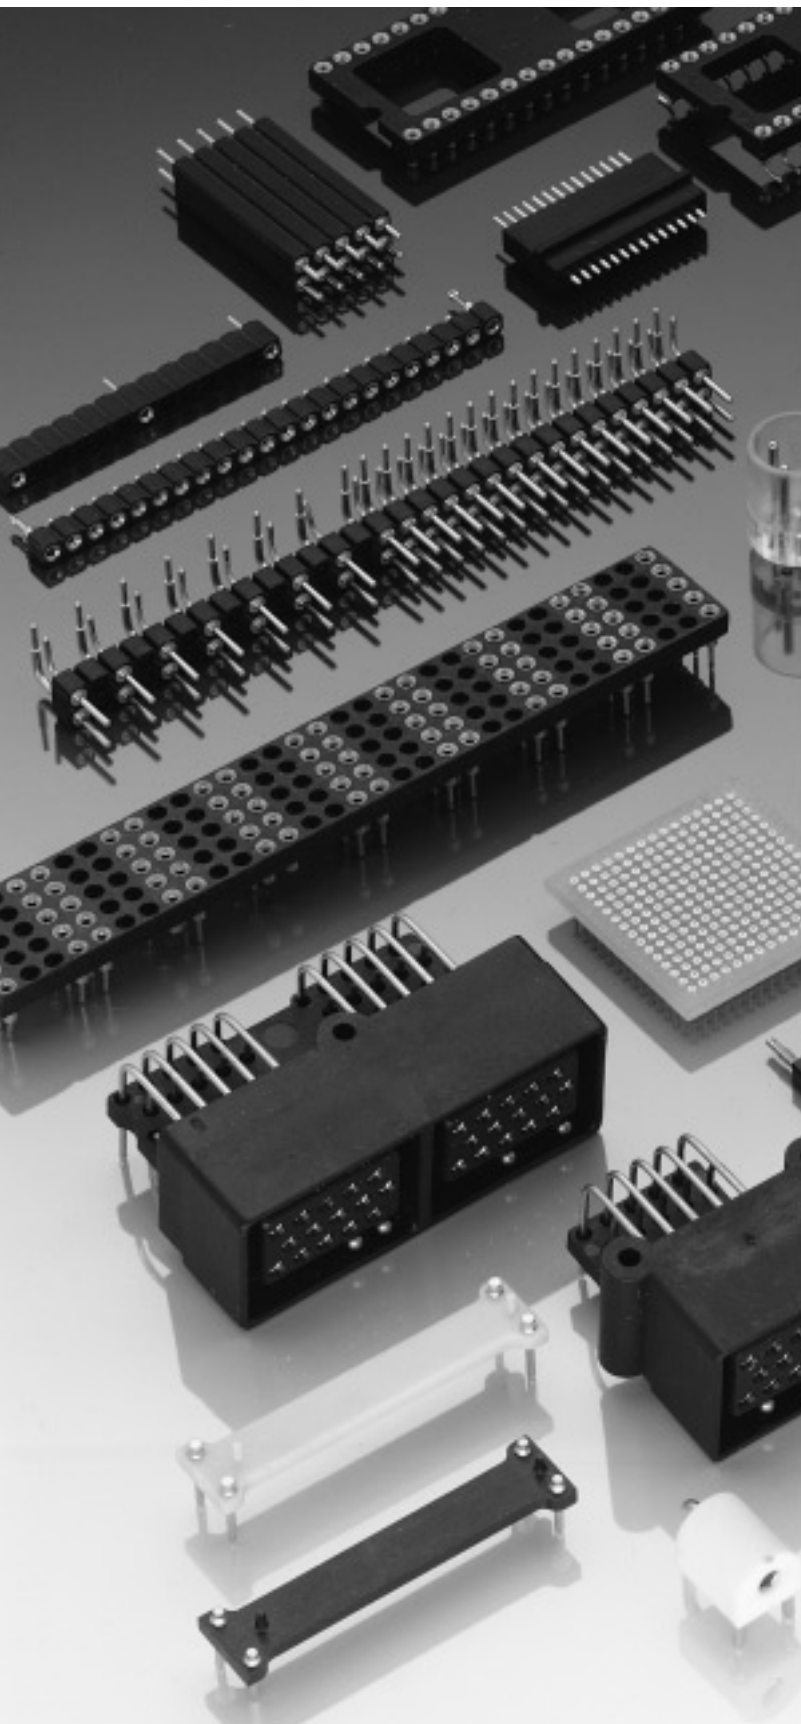PCB layout SMD types Series 540...





Know-how and flexibility

Manufacturing customized product requires above average knowledge and experience. Excellent design capabilities are necessary and a powerful production unit, capable of fulfilling high quality standards. Professionals with an open mind to new design ideas and the ability to turn these ideas into reality quickly at reasonable cost – that is the Preci-Dip crew.

In-house production

Preci-Dip's in-house production capability is practically total, from the raw material to the finished part. It includes precision machining, clip stamping and electroplating of the contact as well as injection molding of the insulator body and automatic assembly.

High quality level

Total control over all important steps of production and a fully integrated Q.A. system allow to guarantee a constantly high quality level. Raw products coming from external sources undergo stringent inspections before they are accepted at Preci-Dip's manufacturing.

Reliability

One of our main goals is reliability. Reliability of the product. Reliability in serving our customers. Reliability in assuring fair prices and delivery times. You may find out for yourself the day you try us.

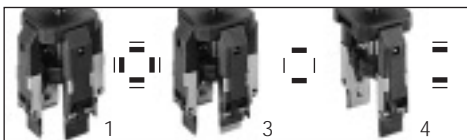
PRECİ-DİP – people who care

PRECİ-DİP

DURTAL

Tools

Cutter / strip saw / PLCC extractor / PGA inserter and extractor



Professional header cutter

Cutting of straight and right angle pin headers and strips

Adjustable plate locator accepts 2.54–10 mm headers.
Blade height adjustable with adjustment screw, replacement blades, blade straight action of 12 mm.
Application range: Cutting of straight and right angle headers without contact loss. Capability to cut one, two and three row headers with 1.0–10 mm height.

Order No. 0200-0108

Strip saw

Please consult

Universal PLCC Extractor Tool

All parts are electrically conductive in order to avoid damage due to electrostatic discharges.

Order No. 9946

Insertion tool for PGA devices from 13×13 to 24×24.

Easy to use, safe and accurate

This tool does not require any prior adjustment and the device can be easily inserted into the socket without damage. The fine adjustment to the size of the socket and insertion are done in one simple operation. In order to avoid electrostatic damage, all materials used are electrically conductive.

Two pressing dies are supplied with the tool.

Type 1 suitable for PGAs 13×13 to 24×24

Type 2 suitable for PGAs 17×17 to 24×24

Operation of tool

Place PGA device correctly aligned on socket. By turning the knob towards the "closed" marker, the claws will grip under the socket and the pressing die will gently insert the device into the socket. To remove tool turn the knob towards the "open" mark, the claws expand and the tool can be removed from the socket.

Order No. 8980200

Extraction tool for PGA devices from 10×10 to 24×24.

Easy to use, safe and accurate

This tool does not require prior adjustment and the PGA device can be extracted easily from its socket without damage. The fine adjustment to the size of the device and the extraction are done in one simple operation. In order to avoid electrostatic damage all material used are electrically conductive.

During the extraction process, the jaws of the tool grip the device firmly. There is no danger of slipping off and damaging the component.

Minimum space requirements between two adjacent components is 2 to 4 mm (.78" to 1.57").

Operation of tool

By turning the knob towards the "closed" marker, the claws grip under the device and extract it from the socket without damage. To remove the device from tool, the claws are expanded by turning the knob towards the "open" mark: the device can now be removed.

Order No. 8980101 tool 1: 4 jaws, 4 rests

8980103 tool 3: 2 jaws, 2 rests

8980104 tool 4: 2 jaws, 2 rests

Index

Part numbers versus catalog page


Reference	page
110...01-505	70
110...10-00	70
110...41-001	53
110...41-005	55
110...41-105	59
110...41-105161	60
110...41-605	56
110...41-801	67
111...41-001	54
114...41-117	59
114...41-1...161	60
115...41-00	57
116...41-0..	58
117...41-005	61
121...41-001	62
122...41-001	62
123...41-001	62
124...41-002	62
126...41-00	71
146...41-0..	64
150...00-001	72
150...00-106	59
150...00-106161	60
151...00-0..	72
153...00-001	73
160...00-001	73
163...00-001	73
170...00-001	73
173...00-001	73
180...00-001	73
183...00-001	73
210...41-001	63
217...41-005	61
299...10-00	75
299...11-001	75
310...01-640	36
310...01-666	36
310...41-001	36
310...41-105	40
310...41-205	40
311...41-001	37
315...41-001	37
315...41-003	37
316...41-0..	38
317...01-687	17
317...41-005	17
321...41-001	42
322...41-001	42
323...41-001	42
324...41-002	42
326...41-00	42
346...41-0..	41

Reference	page
350...00-001	44
350...00-006	43
350...00-012	17
350...00-106	46
350...00-206	46
350...01-666	43
351...00-0	44
353...00-001	74
360...00-001	74
363...00-001	74
370...00-001	74
373...00-001	74
380...00-001	74
383...00-001	74
399...10-003	39
399...10-009	45
410...10-00	70
410...41-001	36
410...41-105	40
411...41-001	37
415...41-001	37
416...41-0..	38
421...41-001	42
422...41-001	42
423...41-001	42
424...41-002	42
426...41-00	42
446...41-0..	41
450...00-001	44
450...00-006	43
450...00-106	46
451...00-0..	44
453...00-001	74
460...00-001	74
463...00-001	74
470...00-001	74
473...00-001	74
480...00-001	74
483...00-001	74
499...10-003	39
499...10-009	45
504...24-000	95
507...	85
510...	80
511...	80
515...	80
516...	81
517...	82
521...	81
522...	81
523...	81
540...17-400	96
540...24-000	94


Reference	page
546...	83
550...	81
551...	81
612...PGA	84
612...41-001	65
614...PGA	84
614...144 PGA	82
614...31-012	66
614...41-001	66
712...41-001	47
714...31-0..	48
714...41-0..	47
800...10-001	30
800...10-002	30
800...20-001	31
800...30-001	32
800...40-001	32
800...65-001	33
800...66-001	33
801...10-001	22
801...10-002	23
801...10-003	24
801...10-004	29
801...10-005	24
801...10-012	23
801...20-001	25
801...20-002	25
801...30-001	26
801...30-002	26
801...40-001	27
801...40-002	27
801...53-001	29
801...65-001	28
801...66-001	28
802...10-001	30
802...10-002	30
802...20-001	31
802...30-001	32
802...65-001	33
802...66-001	33
803...10-001	22
803...10-002	23
803...10-003	24
803...10-004	29
803...10-005	24
803...10-012	23
803...10-227	27
803...20-001	25
803...30-001	26
803...30-002	26
803...53-001	29
803...65-001	28
803...66-001	28
805...10-001	22
805...10-012	23
830...10-001	19
830...20-001	19
830...30-001	20

Reference	page
831...10-001	18
831...20-001	18
831...30-001	20
831...64-001	21
832...10-001	19
832...20-001	19
832...30-001	20
833...10-001	18
833...20-001	18
833...30-001	20
833...64-001	21
850...10-001	13
850...20-001	14
850...30-001	15
850...40-001	15
851...10-001	10
851...20-001	11
851...30-001	12
851...40-001	12
852...10-001	13
852...10-002	13
852...20-001	14
852...20-002	14
852...30-001	15
853...10-001	10
853...10-002	10
853...20-001	11
853...20-002	11
853...30-001	12
854...10-001	13
854...20-001	14
854...30-001	15
855...10-001	10
855...20-001	11
855...30-001	12
890...10-...	34
890...20-...	35
892...10-...	34
892...20-...	35
917...41-005	76
999...	77
Tools	98

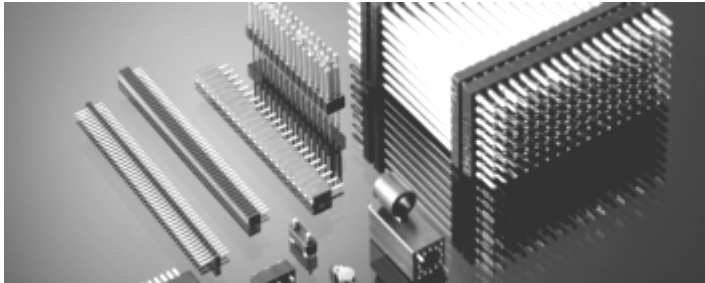
New products for:




- Telecommunications

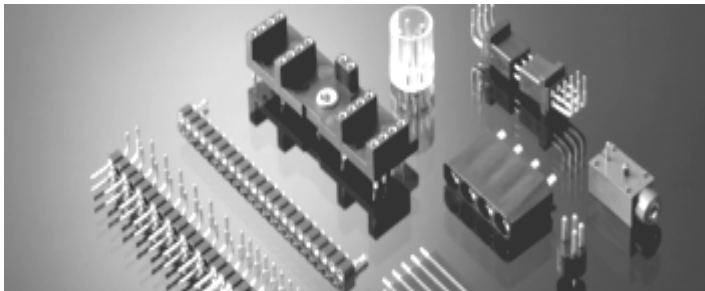

- Industrial electronics

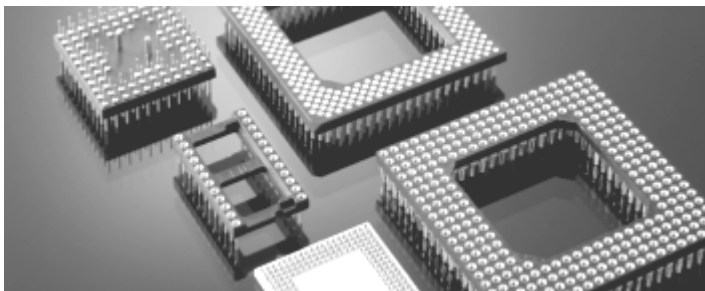

- Computer industry

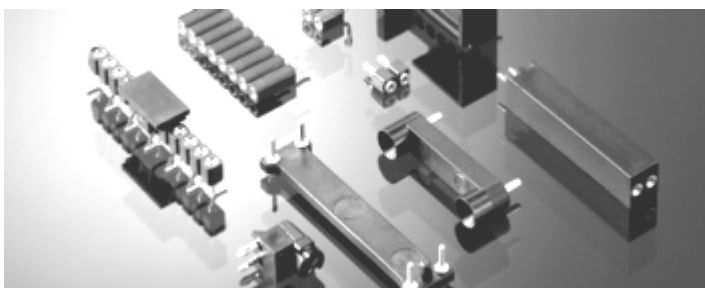


- Automotive industry

Product Description	File Nbr	Page
PCB Connectors		
1 mm PCB Socket Connector Series 861	IP9901.01	101
1 mm PCB Pin Connector Series 860	IP9901.04	103
PCB Connector 1.27 mm SMD, automatic assembly Series 850, 851	IP0001.04	105
PCB Socket Connector 2 mm SMD, automatic assembly Series 831	IP0001.03	107
2 mm polarised PCB Socket Connector Series 831 / 833	IP0003.01	109
2 mm shrouded PCB Pin Connector Series 830 / 832	IP0003.02	113
PCB Socket Connector 2.54 mm SMD, automatic assembly Series 310, 410	IP0001.01	117
PCB Socket Connector 2.54 mm SMD, automatic assembly Series 801, 803	IP0001.02	119
PCB Pin Connector 2.54 mm SMD, automatic assembly Series 350	IP0003.04	121
Shrouded Pin Connector 2.54 mm, machined contacts Series 800 to 804	IP0000.01	123
DIL Sockets		
DIL Socket SMD, automatic assembly Series 110 / 114	IP0001.05	127
PGA, BGA Sockets		
Interstitial PGA Socket SMD Series 514	IP9901.02	130
Interstitial PGA Socket solderless Press-Fit Series 546	IP9901.03	132
BGA Adapter Socket SMD Series 514 / 550	IP9901.05	134
Spring loaded Contacts and Connectors		
Springloaded Contact low profile	IP0002.01	136
Springloaded Contact ultra thin	IP0002.02	138
Modular low profile Springloaded Connector Series 811 and 813	IP0000.02	140
Springloaded Chip Card Connector	IP0000.03	142
Spring Manufacturing		144

1 mm Socket Connector with precision machined Contacts Series 861

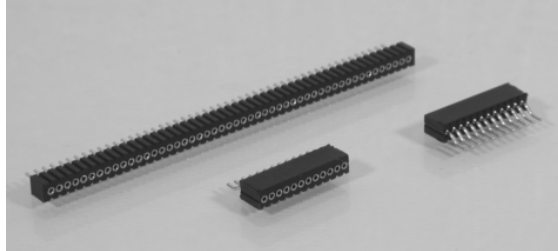1. Description and general features



1.1 General description

Series 860 connectors, introduced exclusively by Preci-Dip to its metric product line, are equipped with machined contacts in a pitch of 1 mm.

They come in a single row version with 50 poles maximum and have a very low profile insulator withstanding reflow soldering temperatures. The connector is suitable for through hole or SMD soldering to the PCB.

The female contacts have a screw-machined outer contact sleeve equipped with an inserted four finger contact clip. This clip is a new design and was optimised by FEM "Finite Elements Modelling".

1.2 Advantages

Metric 1 mm pitch saves approximately 30% of

space per surface unit when compared with 1.27mm pitch.

Very low profile insulator allows interconnection of PCBs with a stacking distance of only 4 mm when used with trough-hole soldering tails.

Thanks to the new clip design, male contacts with 0.4 mm diameter can be used and guarantee mechanical strength, combined with low insertion/extraction forces (specially important with high pin counts).

1.3 Applications

Specially recommended for applications with extremely little space in surface and/or height, and high requirements in electrical quality and mechanical strength, such as:

- Industrial sensors, remote control transceivers
- Medical equipment, systems with embedded microprocessors
- Portable terminals, mobile phones, professional mobile radios

1.4 Optional versions

Currently none

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 125°C
Climatic Category (IEC)	55 / 125 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact body	Machined brass, tin plating 5 µm SnPb over 2.5 µm Ni
Contact spring	BeCu, gold plated (0.25 or 0.75 µm) over Ni
Insulator	Glass fibre reinforced liquid crystal polymer LCP, self-extinguishing UL94V-0, colour black

2.3 Mechanical Characteristics

Accepts pins	Diameter 0.40 to 0.46 mm
Solder tail	Cylindrical, diameter 0.40 mm
Mechanical life	min.500 cycles
Coplanarity SMD terminations	0.1 mm

2.4 Electrical Characteristics

Operating voltage	50 V _{RMS} / 60 V _{DC}
Continuous operating current	max. 1 A per terminal
Contact resistance	max 10 mΩ
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	500 V _{RMS}
Air and creepage distances	0.20 mm
Capacitance	1 pF max.

3. Ordering Information


3.1 Dimensions, Order Code Numbers and Packaging Information

Contact Plating Code -PP-:	-91-	Body: tin, Clip: gold 0.25 um
	-93-	Body: tin, Clip: gold 0.75 um

Code for number of contacts –0NN-: (example for a 26 poles connector: -026-)


Packaging: version with straight solder pins: in box
SMD versions: Tape & Reel packaging

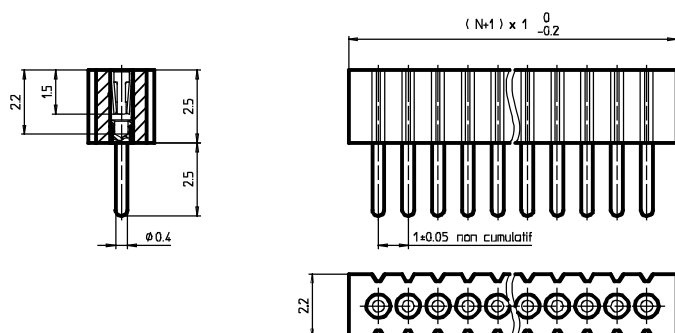3.1.1 Socket Connector, single row, straight solder pin, PN 861-PP-0NN-10-001101



Available number of pins: 2 to 50

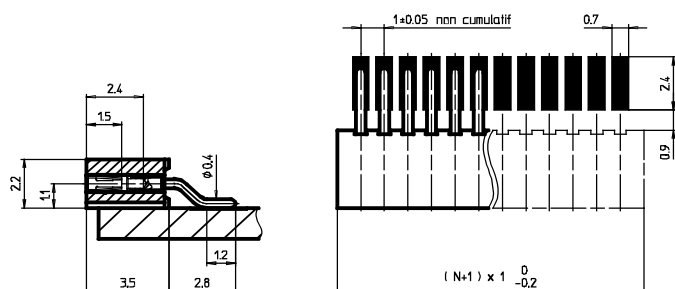3.1.2 Socket Connector, single row, SMD horizontal mount, PN 861-PP-0NN-40-001191



Available number of pins: 6 to 12


Packaging:	6 to 8 poles	10 to 12 poles
Tape width	16 mm	24 mm
Pitch on tape	12 mm	12 mm
Reel diameter	330 mm	330 mm
Number of pcs per reel:	2000	2000
Number of pcs per box:	10'000	6000

3.2 Availability

Now

1 mm Pin Connector with Precision machined Contacts Series 860

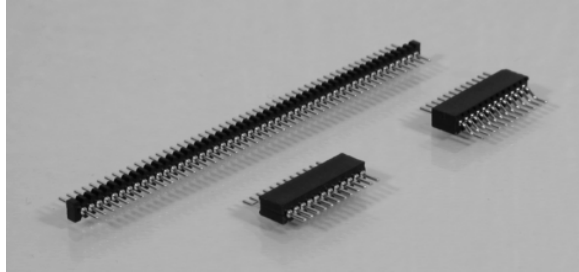1. Description and general features



1.1 General description

Series 860 connectors, introduced exclusively by Preci-Dip to its metric product line, are equipped with machined contacts in a pitch of 1 mm.

They come in a single row version with 50 poles maximum and have a very low profile insulator withstanding reflow soldering temperatures. The connector is suitable for through hole or SMD soldering to the PCB

1.2 Advantages

Metric 1 mm pitch saves approximately 30% of space per surface unit when compared with 1.27mm pitch.

Very low profile insulator allows interconnection of PCBs with a stacking distance of only 4 mm when used with trough-hole soldering tails.

1.3 Applications

Specially recommended for applications with extremely little space in surface and/or height, and high requirements in electrical quality and mechanical strength, such as:

- Industrial sensors, remote control transceivers
- Medical equipment, systems with embedded microprocessors
- Portable terminals, mobile phones, professional mobile radios

1.4 Optional versions

Currently none

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 125°C
Climatic Category (IEC)	55 / 125 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact	Machined brass, gold plated 0.25 µm Au or tin plated 5 µm SnPb over 2.5 µm Ni
Insulator	Glass fibre reinforced liquid crystal polymere LCP, self-extinguishing UL94V-0, colour black

2.3 Mechanical Characteristics

Contact pin	Cylindrical, diameter 0.40 mm
Solder tail	Cylindrical, diameter 0.40 mm
Mechanical life	min.500 cycles
Coplanarity SMD terminations	0.1 mm

2.4 Electrical Characteristics

Operating voltage	50 V _{RMS} / 60 V _{DC}
Continuous operating current	max. 1 A per terminal
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	500 V _{RMS}
Air and creepage distances	min. 0.20 mm
Capacitance	max. 1 pF

3. Ordering Information

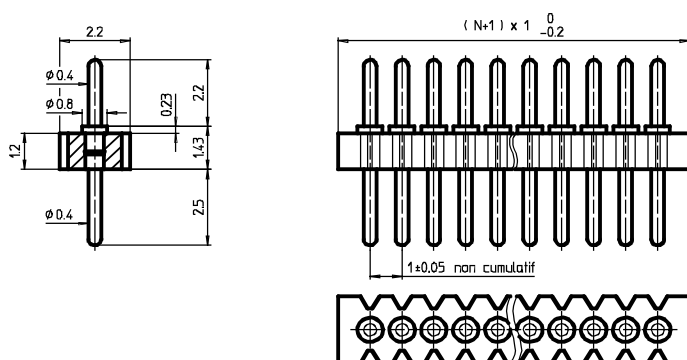
3.1 Dimensions, Order Code Numbers and Packaging Information

Contact Plating Code -PP-: -10- Gold 0.25 um
 -90- Tin

Code for number of contacts -ONN-: (example for a 26 poles connector: -026-)


Packaging: version with straight solder pins: in box
 SMD versions: Tape & Reel packaging

3.1.1 Pin Connector, single row, straight solder pin, PN 860-PP-0NN-10-001101



Available number of pins: 2 to 50

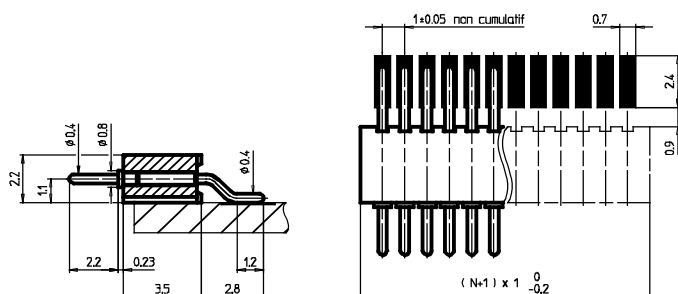3.1.2 Pin Connector, single row, SMD horizontal mount, PN 860-PP-0NN-40-001191



Available number of pins: 6 to 12


Packaging:	6 to 8 poles	10 to 12 poles
Tape width	16 mm	24 mm
Pitch on tape	12 mm	12 mm
Reel diameter	330 mm	330 mm
Number of pcs per reel:	2000	2000
Number of pcs per box:	10'000	6000

3.2 Availability

Now

PCB Connector Strip 1.27 mm SMD for automatic assembly Series 850/851

1. Description and general feature



1.1 General description

The 1.27 mm connectors for SMD mount Series 850-...- 40.251191 (pin) and Series 851-...-40-252191 (receptacle) are now available from PRECI-DIP with Tape & Reel packaging acc. to EIA 481 Standard and with modified plastic body for automatic assembly on the PCB.

They come in single row version with min. 6 and max. 12 poles.

The max. number of poles is given by the coplanarity limitations and the tape width of the existing tapes.

1.2 Advantages

The modified plastic body with enlarged width makes automatic assembly with standard vacuum nozzle possible.

1.3 Applications

Specially recommended for high volume applications on automatic PCB assembly lines.

1.4 Optional versions

Same connector strips also available without Tape & Reel packaging and plastic cap, please see PRECI-DIP catalogue 10.

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 125°C
Climatic Category (IEC)	55 / 125 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact body and contact pin	Machined brass, plating 5 µm SnPb or 025 µm gold over 2.5 µm Ni
Contact spring	BeCu, plated 5 µm SnPb or gold (0.25 or 0.75 µm) over Ni
Insulator	Glass fibre reinforced high temperature polyester PCT, self-extinguishing UL94V-0, colour black

2.3 Mechanical Characteristics

Pin diameter	Diameter 0.43 mm
SMD solder tail	Cylindrical 0.53 mm diameter
Coplanarity SMD Terminations	0.1 mm
Mechanical life	min. 500 cycles

2.4 Electrical Characteristics

Operating voltage	50 V _{RMS} / 75 V _{DC}
Continuous operating current	max. 1 A per terminal
Contact resistance	max. 20 mΩ
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	500 V _{RMS}
Air and creepage distances	min. 0.5 mm
Capacitance	max. 1 pF

3. Ordering Information

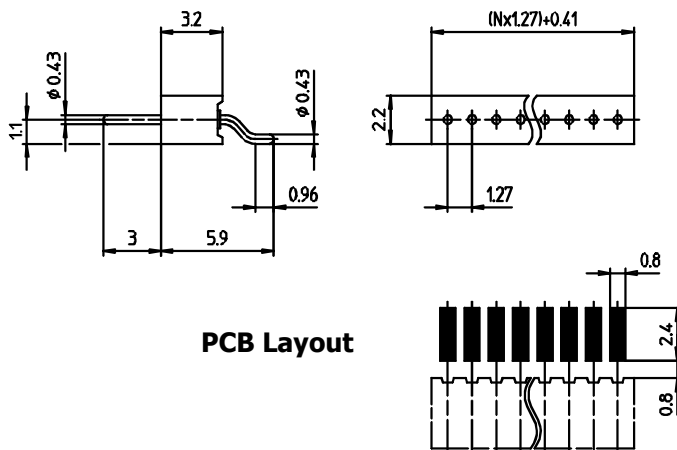
3.1 Dimensions, Order Number Codes and Packaging Information

Code for number of contacts –0NN– (Example for a 12 poles connector: -012-)

3.1.1 Connector PN 850-PP-0NN-40-251191,

Contact Plating Code –PP–:

- 10- Gold 0.25 um
- 90- SnPb




Available number of pins: 6 to 12

Packaging:	6 to 8 poles	10 to 12 poles
Tape width	16 mm	24 mm
Pitch on tape	12 mm	12 mm
Reel diameter	330 mm	330 mm
Number of pcs per reel:	2000	2000
Number of pcs per box:	10'000	6000

3.1.2 Receptacle Connector PN 851-PP-0NN-40-252191

Contact Plating Code –PP–:

- | | body | spring |
|------|-------------|---------------|
| -91- | SnPb | Gold 0.25 um |
| -93- | SnPb | Gold 0.75 um |
| -99- | SnPb | SnPb |

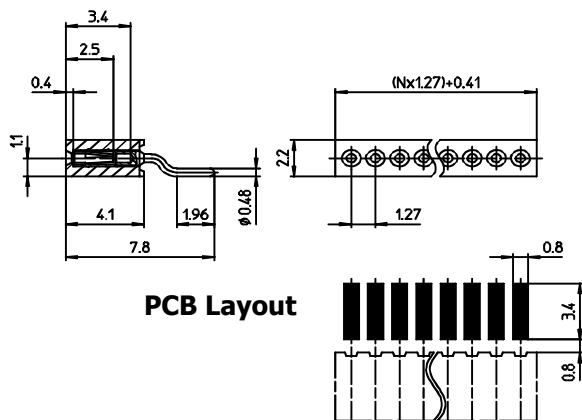

Available number of pins: 6 to 12


Packaging:	6 to 8 poles	10 to 12 poles
Tape width	16 mm	24 mm
Pitch on tape	12 mm	12 mm
Reel diameter	330 mm	330 mm
Number of pcs per reel:	2000	2000
Number of pcs per box:	10'000	6000

3.2 Availability

Now

PCB Connector Strip 2 mm SMD for automatic assembly Series 831

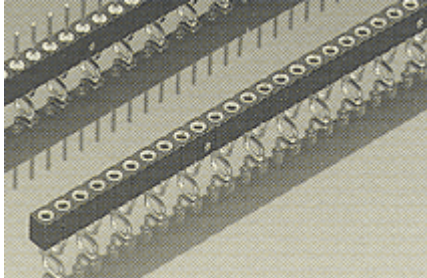1. Description and general features



1.1 General description

The 2 mm receptacle connectors for SMD mount Series 831-...-30-001191 are now available from PRECI-DIP with Tape & Reel packaging acc. to EIA 481 Standard and with removable plastic cap for automatic assembly on the PCB.

They come in single row version with min. 3 and max. 16 poles.

The max. number of poles is given by the coplanarity limitations and the width of the existing tape 44 mm.

1.2 Advantages

With the additional plastic cap, automatic assembly with standard vacuum nozzle is made possible.

1.3 Applications

Specially recommended for high volume applications on automatic PCB assembly lines.

1.4 Optional versions

Same connector strips also available without Tape & Reel packaging and plastic cap, please see PRECI-DIP catalogue 10.

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 125°C
Climatic Category (IEC)	55 / 125 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact body	Machined brass, plating 5 µm SnPb over 2.5 µm Ni
Contact spring	BeCu, plated 5 µm SnPb or gold (0.25 or 0.75 µm) over Ni
Insulator	Glass fibre reinforced high temperature polyester PCT, self-extinguishing UL94V-0, colour black

2.3 Mechanical Characteristics

Accepts pins	Diameter 0.40 to 0.56 mm and 0.50 mm square
SMD solder tail	Cylindrical 0.53 mm diameter
Coplanarity SMD Terminations	0.1 mm (0.15 mm for connectors with more than 25 mm total length)
Mechanical life	min. 500 cycles

2.4 Electrical Characteristics

Operating voltage	100 V _{RMS} / 150 V _{DC}
Continuous operating current	max. 1 A per terminal
Contact resistance	max. 10 mΩ
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	1000 V _{RMS}
Air and creepage distances	min. 0.5 mm
Capacitance	max. 1 pF


3. Ordering Information

3.1 Dimensions, Order Number Codes and Packaging Information

Contact Plating Code –PP–:	body	spring
-91-	SnPb	Gold 0.25 um
-93-	SnPb	Gold 0.75 um
-99-	SnPb	SnPb

Code for number of contacts –ONN– or (Example for 12 poles connector: -012-)

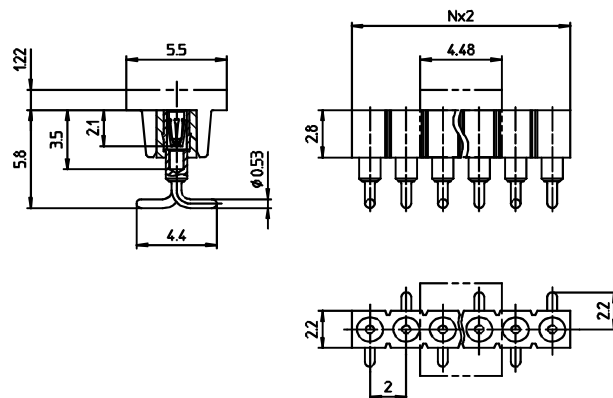3.1.1 Connector PN 831-PP-0NN-30-001191,




Available number of pins: 3 to 16

Packaging:

Tape width 44 mm
Pitch on tape 12 mm
Reel diameter 330 mm
Number of pcs per reel: 750
Number of pcs per box: 3000

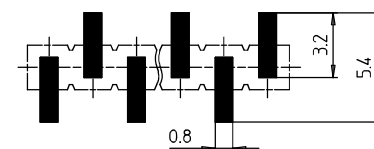PCB Layout




3.2 Availability

Now

2 mm polarised Socket Connector with precision machined Contacts Series 831 and 833

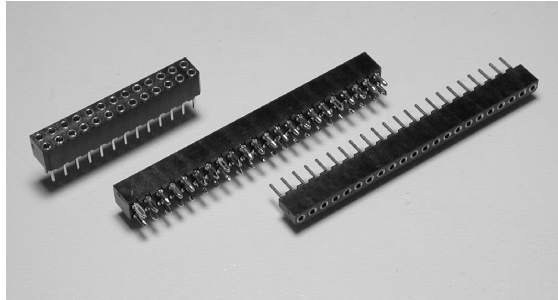1. Description and general features



1.1 General description

The series 831 and 833 polarised metric socket connectors, introduced by PRECI-DIP to complete its comprehensive range of PCB connectors with 2 mm pitch, are equipped with machined pins. Polarisation is given, when mated with the corresponding shrouded pin connector Series 830 and 832, by the asymmetric form of the insulator body.

They are available today in single row version with 22 poles and in double row version with 26 and 44 poles.

The terminations are straight through hole solder pins, SMD pads, and solderless compliant press-fit pins.

1.2 Advantages

This socket connectors have same characteristics as the standard metric ones presented in Preci-Dip catalog No 10 with additional advantages of polarisation and easier mating.

1.3 Applications

Specially recommended for miniature applications with limited available space and demanding mechanical requirements. Design helps connector mating in place with no direct sight on the connector, such as:

- Equipment for industrial and process control
- Medical equipment
- Automotive electronics

1.4 Optional versions

For other pin count, between min. 2 and max. 22 per row, please consult.

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 125°C
Climatic Category (IEC)	55 / 125 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact body	Machined brass, tin plating 5 µm SnPb over 2.5 µm Ni
Press-Fit contact	Machined bronze, 1-2 µm SnPb over 2.5 µm Ni
Contact spring	BeCu, plated 5 µm SnPb or gold (0.25 or 0.75 µm) over Ni
Insulator	Glass fibre reinforced liquid crystal polymer LCP, self-extinguishing UL94V-0, colour black

2.3 Mechanical Characteristics

Accepts pins	Diameter 0.40 to 0.56 mm, or square pins 0.5 x 0.5 mm
Solder tail	Cylindrical, diameter 0.53 mm
Mechanical life	min.500 cycles
Coplanarity SMD terminations	0.1 mm (0.15 mm for connectors with more than 25 mm total length)

2.4 Electrical Characteristics

Operating voltage	100 V _{RMS} / 150 V _{DC}
Continuous operating current	max. 3 A per terminal
Contact resistance	max 10 mΩ
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	700 V _{RMS}
Air and creepage distances	0.50 mm
Capacitance	1 pF max.

3. Ordering Information


3.1 Dimensions, Order Code Numbers and Packaging Information

Contact Plating Code -PP-:	-91-	Body: tin, Clip: gold 0.25 um
	-93-	Body: tin, Clip: gold 0.75 um
	-99-	Body and Clip: tin

Code for number of contacts –0NN-: (example for a 26 poles connector: -026-)


Packaging: **Standard packaging:** in box: replace xxx by suffix 101 to part number
Tape & Reel packaging: with plastic cap for automatic assembly with vacuum nozzle available on request for SMD mount version only (min. quantity 10'000 pcs): replace xxx by suffix 191 to part number

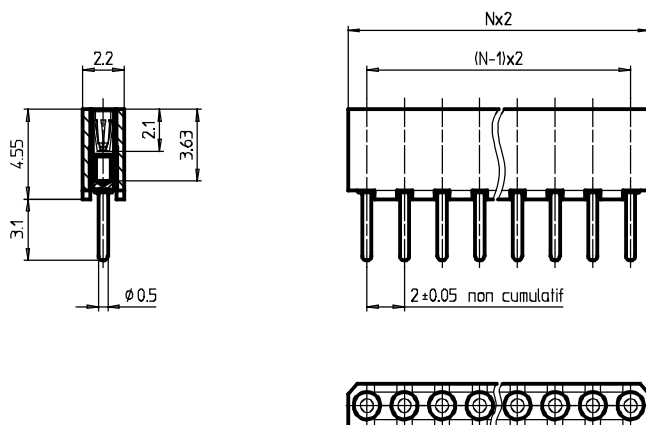3.1.1 Socket Connector, single row, straight solder pin, PN 831-PP-0NN-10-242xxx




Available number of pins: 22

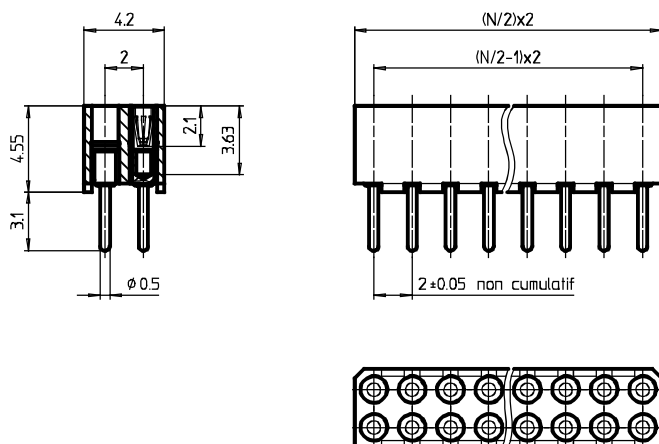3.1.2 Socket Connector, double row, straight solder pin, PN 833-PP-0NN-10-245xxx



Available number of pins: 26 and 44

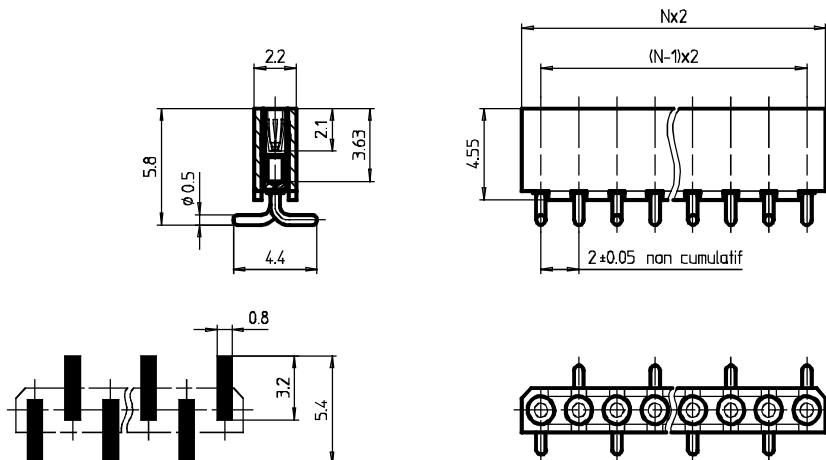
3.1.3 Socket Connector, single row, SMD vertical mount, PN 831-PP-0NN-30-242xxx



Available number of pins: 22

PCB layout

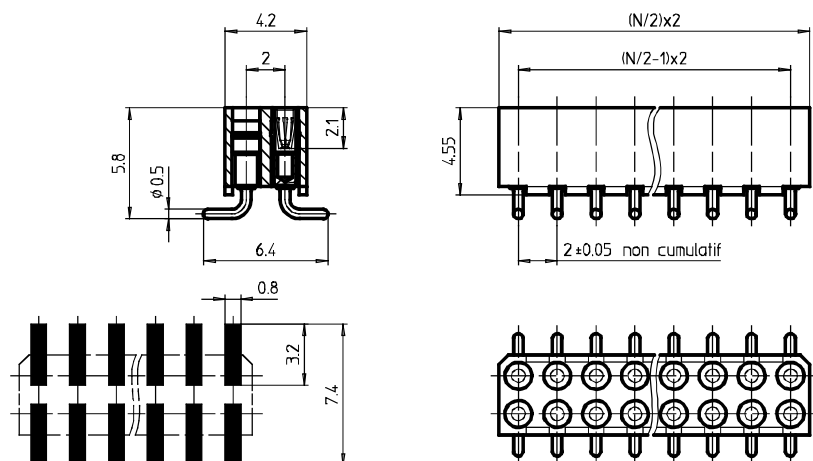
3.1.4 Socket connector, double row, SMD mount, PN 833-PP-0NN-30-245xxx



**Available number of pins: 26
and 44**

PCB layout

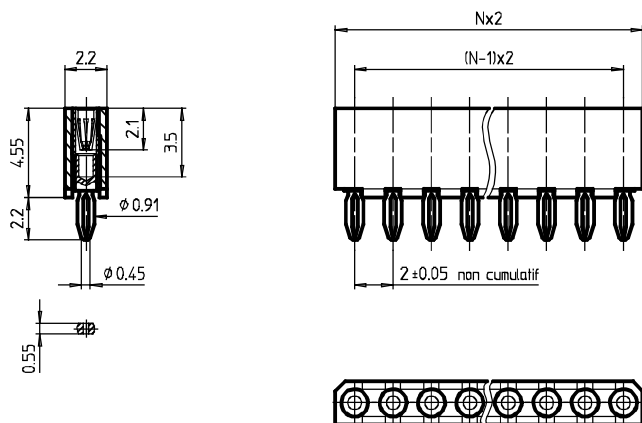3.1.5 Socket Connector, single row, press-fit mount, PN 831-PP-0NN-64-242xxx




PCB and plated-through hole requirements:

- PCB material Epoxy glass laminate
FR4 or equivalent
- Thickness 1.5 to 2 mm
- Hole diameter 0.71 mm +/- 0.06 mm
- Hole metallisation min. 5 µm SnPb over
min. 25 µm Cu

Available number of pins: 22

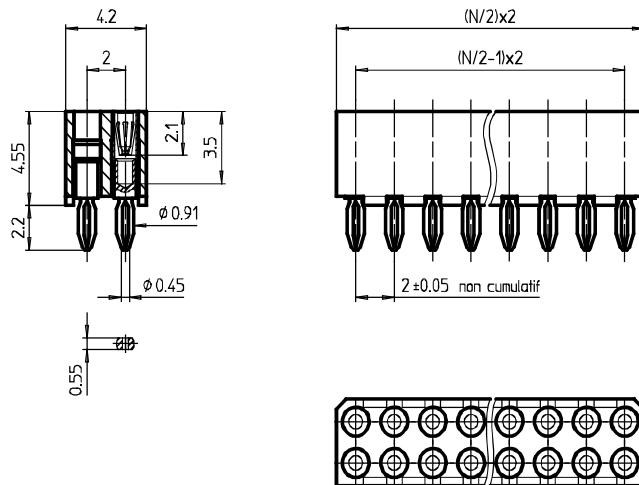3.1.6 Socket Connector, double row, press-fit mount, PN 833-PP-0NN-64-245xxx



PCB and plated-through hole requirements:

- PCB material Epoxy glass laminate FR4 or equivalent
- Thickness 1.5 to 2 mm
- Hole diameter 0.71 mm +/- 0.06 mm
- Hole metallisation min. 5 um SnPb over min. 25 um Cu

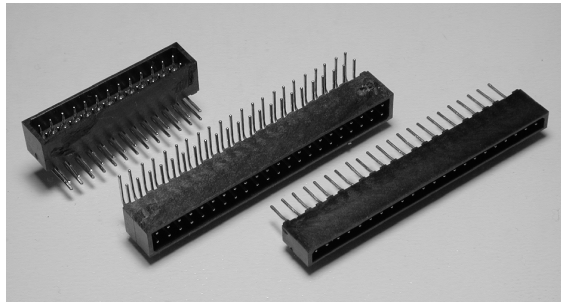
Available number of pins: 26 and 44

3.2 Availability

Samples: Second quarter 2001
Volume quantities: Second quarter 2001

2 mm shrouded Pin Connector with Precision machined Contacts Series 830 and 832

1. Description and general features



1.1 General description

The series 830 and 832 shrouded metric pin connectors, introduced by PRECI-DIP to complete its comprehensive range of PCB connectors with 2 mm pitch, are equipped with machined pins. Polarisation is given, when mated with corresponding receptacle connectors Series 831-...-242 and 833-...-245 with asymmetric form of the insulator body.

They are available today in single row version with 22 poles and in double row version with 26 and 44 poles.

The terminations are straight and right angle through hole solder pins and SMD solder pads.

1.2 Advantages

This pin connectors have all advantages of the machined pins that show a smooth surface in the contact area allowing a high mechanical life, combined with the improved mechanical characteristics of shrouded connector body.

The contacts are available with gold or tin (SnPb 90/10) plating.

1.3 Applications

Specially recommended for miniature applications with limited available space and demanding mechanical requirements. Design helps connector mating in place with no direct sight on the connector, such as:

- Equipment for industrial and process control
- Medical equipment
- Automotive electronics

1.4 Optional versions

For other pin count, between min. 2 and max. 22 per row, please consult.

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 125°C
Climatic Category (IEC)	55 / 125 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact	Machined brass, gold plated 0.25 µm Au or tin plated 5 µm SnPb over 2.5 µm Ni
Insulator	Glass fibre reinforced liquid crystal polymere LCP, self-extinguishing UL94V-0, colour black

2.3 Mechanical Characteristics

Contact pin	Cylindrical, diameter 0.47 mm
Solder tail	Cylindrical, diameter 0.50 mm
Mechanical life	min.500 cycles
Coplanarity SMD terminations	0.1 mm (0.15 mm for connectors with more than 25 mm total length)

2.4 Electrical Characteristics

Operating voltage	100 V _{RMS} / 150 V _{DC}
Continuous operating current	max. 3 A per terminal
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	700 V _{RMS}
Air and creepage distances	min. 0.50 mm
Capacitance	max. 1 pF

3. Ordering Information

3.1 Dimensions, Order Code Numbers and Packaging Information

Contact Plating Code -PP-: -10- Gold 0.25 um
 -90- Tin

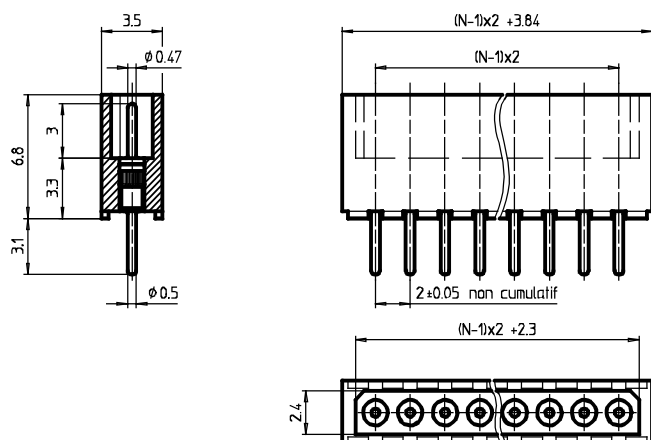
Code for number of contacts -0NN-: (example for a 26 poles connector: -026-)

Packaging:

Standard packaging: in box: replace xxx by suffix 101 to part number


Tape & Reel packaging: with plastic cap for automatic assembly with vacuum nozzle available on request for SMD mount version only (min. quantity 10'000 pcs): replace xxx by suffix 191 to part number

3.1.1 Pin Connector, single row, straight solder pin, PN 830-PP-0NN-12-002xxx




Available number of pins: 22

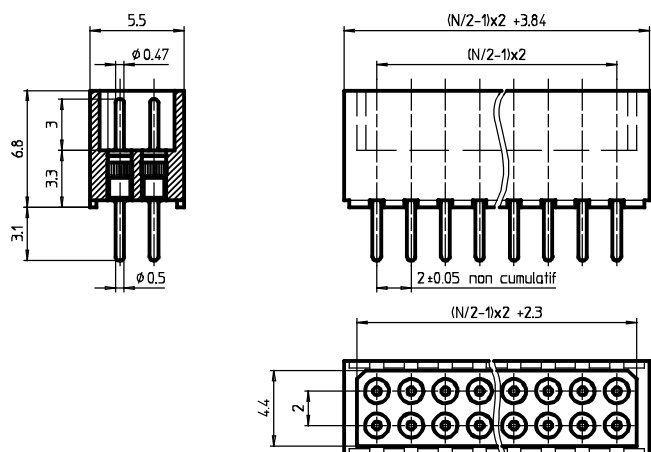3.1.2 Pin Connector, double row, straight solder pin, PN 832-PP-0NN-12-002xxx




Available number of pins: 26 and 44

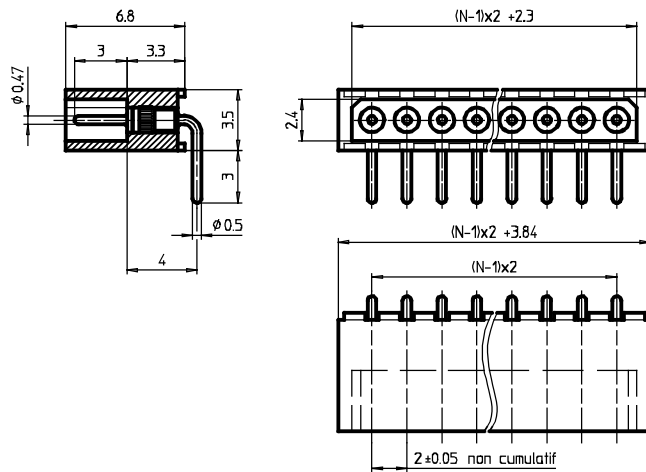3.1.3 Pin Connector, single row, right angle solder pin, PN 830-PP-0NN-22-002xxx




Available number of pins: 22

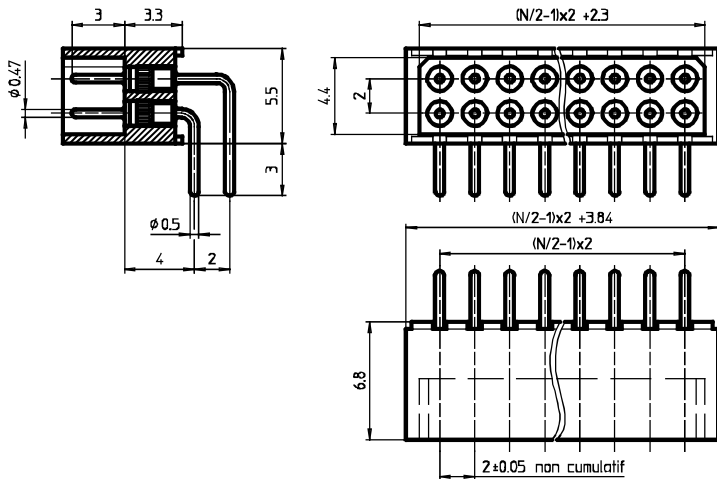3.1.4 Pin Connector, double row, right angle solder pin, PN 832-PP-0NN-22-002xxx



Available number of pins: 26 and 44

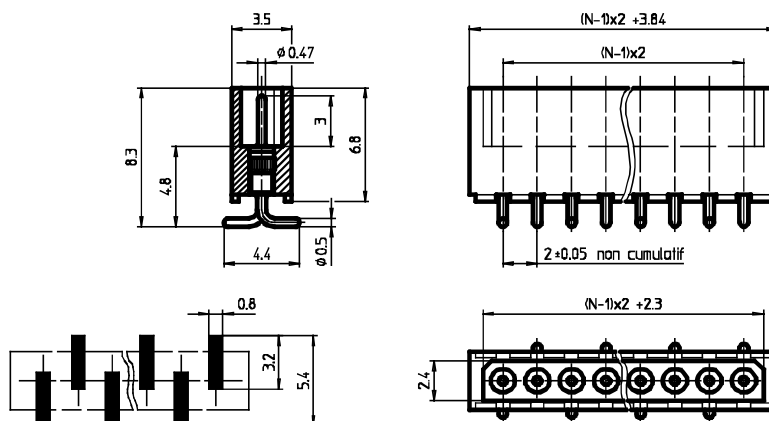
3.1.5 Pin Connector, single row, SMD vertical mount, PN 830-PP-0NN-32-002xxx



Available number of pins: 22

PCB layout

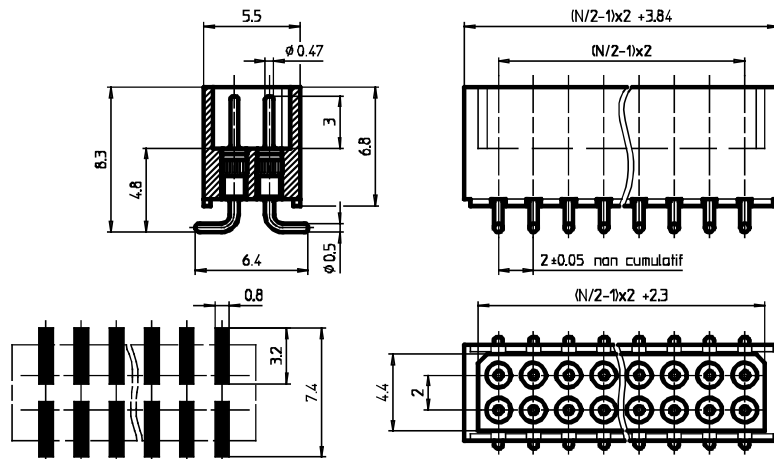3.1.6 Pin Connector, double row, SMD vertical mount, PN 832-PP-0NN-32-002xxx



Available number of pins: 26 and 44

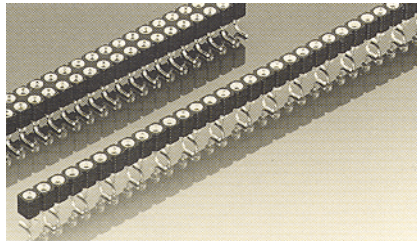
PCB layout

3.2 Availability

Samples: Second quarter 2001
Volume quantities: Second quarter 2001

PCB Connector Strip 2.54 mm SMD for automatic assembly Series 310 and 410

1. Description and general features



1.1 General description

The Series 310-... , 410-...-105191 and 310-...-205191 receptacle connectors for SMD mount are now available from PRECI-DIP with Tape & Reel packaging acc. to EIA 481 Standard. The vertical mount series with PN ending with -105191 are with removable plastic cap for automatic assembly on the PCB. The horizontal mount series, with PN ending with -205191, are with a specific insulator without notch on the upper side.

They come in single row version with min 2 (min 3 poles for vertical mount version) to max 12 poles, and in double row version (only vertical mount) with min 10 and max 34 poles.

The max. possible number of poles is given by the coplanarity limitations and the tape width of 56 mm, maximum size that PRECI-DIP can process.

1.2 Advantages

With the specific insulator or the additional plastic cap, automatic assembly with standard vacuum nozzle is made possible.

1.3 Applications

Specially recommended for high volume applications on automatic PCB assembly lines.

1.4 Optional versions

Same connector strips also available without Tape & Reel packaging and plastic cap, please see PRECI-DIP catalogue 10.

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 125°C
Climatic Category (IEC)	55 / 125 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact body	Machined brass, plating 5 µm SnPb over 2.5 µm Ni
Contact spring	BeCu, plated 5 µm SnPb or gold (0.1, 0.25 or 0.75 µm) over Ni
Insulator	Glass fibre reinforced high temperature polyester PCT, self-extinguishing UL94V-0, colour black

2.3 Mechanical Characteristics

Accepts pins	Diameter 0.45 to 0.56 mm
SMD solder tail	Cylindrical 0.52 mm diameter
Coplanarity SMD Terminations	0.1 mm (0.15 mm for connectors with more than 25 mm total length)
Mechanical life	min. 500 cycles

2.4 Electrical Characteristics

Operating voltage	100 V _{RMS} / 150 V _{DC}
Continuous operating current	max. 1 A per terminal
Contact resistance	max. 10 mΩ
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	1000 V _{RMS}
Air and creepage distances	min. 0.7 mm
Capacitance	max. 0.3 pF


3. Ordering Information

3.1 Dimensions, Order Number Codes and Packaging Information

Contact Plating Code –PP–:	body	spring
-91-	SnPb	Gold 0.25 um
-93-	SnPb	Gold 0.75 um
-97-	SnPb	Flash gold
-99-	SnPb	SnPb


Code for number of contacts –1NN- or –2NN- (Example for a single row 12 poles connector: -112-)

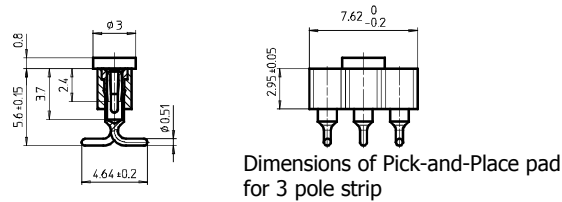3.1.1 Connector PN 310-PP-1NN-01-105191




Available number of pins: 3 to 12
Packaging:

	3 poles	4 to 9 poles	10 to 17 poles
Tape width	16 mm	32 mm	56 mm
Pitch on tape	12 mm	12 mm	12 mm
Reel diameter	330 mm	330 mm	330 mm
Number of pcs per reel:	850	650	650
Number of pcs per box:	4250	1950	1950

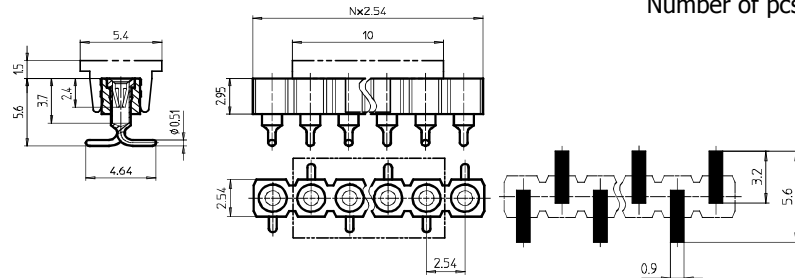

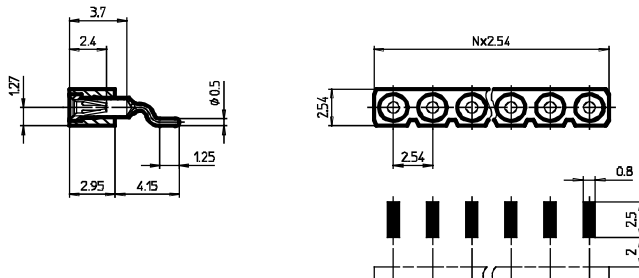3.1.2 Connector PN 310-PP-1NN-41-205191




Available number of pins: 2 to 8
Packaging:

Tape width	32 mm
Pitch on tape	16 mm
Reel diameter	330 mm
Number of pcs per reel:	1500
Number of pcs per box:	4500

PCB Layout

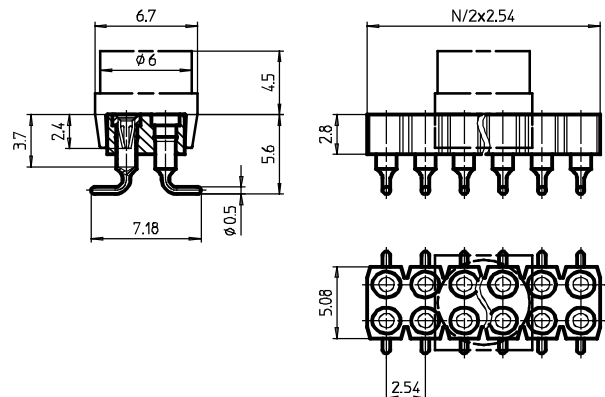3.1.3 Connector PN 410-PP-2NN-41-105191



Available number of pins: 10 to 34
Packaging:

Tape width	56 mm
Pitch on tape	16 mm
Reel diameter	330 mm
Number of pcs per reel:	350
Number of pcs per box:	1050

PCB Layout

3.2 Availability


Now

Preci-Dip Durtal SA

CH-2800 Delémont / Switzerland
 phone +41 (32) 421 04 00 - fax +41 (32) 421 04 01
 mail:sales@precidip.com – www.precidip.com

PCB Connector Strip 2.54 mm SMD for automatic assembly Series 801 and 803

1. Description and general features



1.1 General description

The SMD receptacle connectors Series 801 / 803 are now available from PRECI-DIP with Tape & Reel packaging acc. to EIA 481 Standard.

The horizontal mount Series 801-...-40-001191 are with a specific insulator without notch on the upper side, and the vertical mount Series 803-...-30-001191 (height over PCB = 8.6 mm) and 803-...-30-002191 (height over PCB = 5.6 mm) are with removable plastic cap for automatic assembly on the PCB.

They come in single row version from min. 2 to max. 8 poles and in double row version with min. 10 and max. 34 poles.

The max. possible number of poles is given by the coplanarity limitations and the tape width of 56 mm, maximum size that PRECI-DIP can process.

1.2 Advantages

With the specific insulator body or the additional plastic cap, automatic assembly with standard vacuum nozzle is made possible.

1.3 Applications

Specially recommended for high volume applications on automatic PCB assembly lines.

1.4 Optional versions

Same connector strips also available without Tape & Reel packaging and plastic cap, please see PRECI-DIP catalogue 10.

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 125°C
Climatic Category (IEC)	55 / 125 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact body	Machined brass, plating 5 µm SnPb over 2.5 µm Ni
Contact spring	BeCu, plated 5 µm SnPb or gold (0.25 or 0.75 µm) over Ni
Insulator	Glass fibre reinforced high temperature polyester PCT, self-extinguishing UL94V-0, colour black

2.3 Mechanical Characteristics

Accepts pins	Diameter 0.70 to 0.80 mm and 0.635 mm square
SMD solder tail	Cylindrical 0.60 mm diameter
Coplanarity SMD Terminations	0.1 mm (0.15 mm for connectors with more than 25 mm total length)
Mechanical life	min. 500 cycles

2.4 Electrical Characteristics

Operating voltage	100 V _{RMS} / 150 V _{DC}
Continuous operating current	max. 3 A per terminal
Contact resistance	max. 10 mΩ
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	1000 V _{RMS}
Air and creepage distances	min. 0.7 mm
Capacitance	max. 0.3 pF

3. Ordering Information


3.1 Dimensions, Order Number Codes and Packaging Information

Contact Plating Code –PP-:

	body	spring
-91-	SnPb	Gold 0.25 um
-93-	SnPb	Gold 0.75 um
-99-	SnPb	SnPb

Code for number of contacts –ONN- (Example for 12 poles connector: -012-)

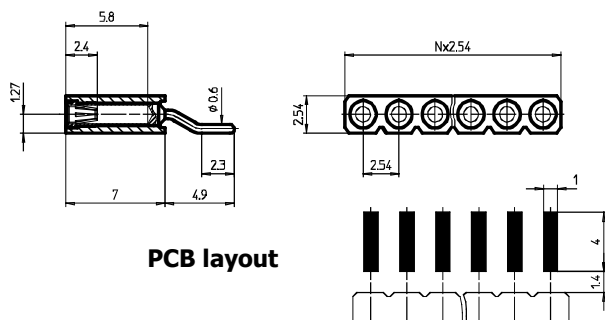3.1.1 Connector PN 801-PP-ONN-40-001191




PCB layout

Available number of pins: 2 to 8

Packaging:

Tape width 32 mm
Pitch on tape 16 mm
Reel diameter 330 mm
Number of pcs per reel: 1300
Number of pcs per box: 3900

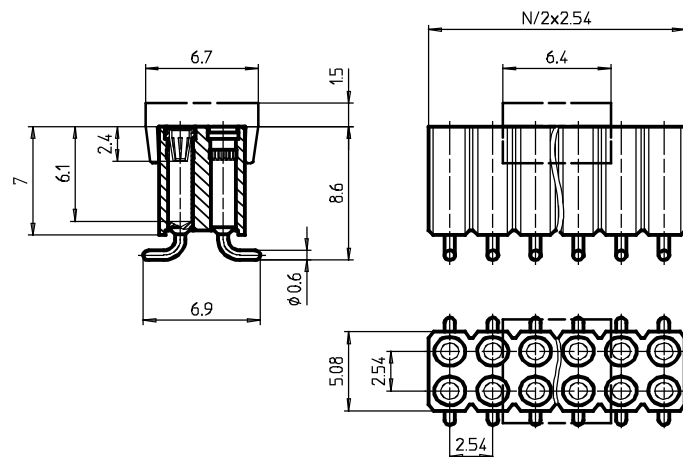3.1.2 Connector PN 803-PP-ONN-30-001191




PCB layout

Available number of pins: 10 to 34

Packaging:

Tape width 56 mm
Pitch on tape 16 mm
Reel diameter 330 mm
Number of pcs per reel: 350
Number of pcs per box: 1050

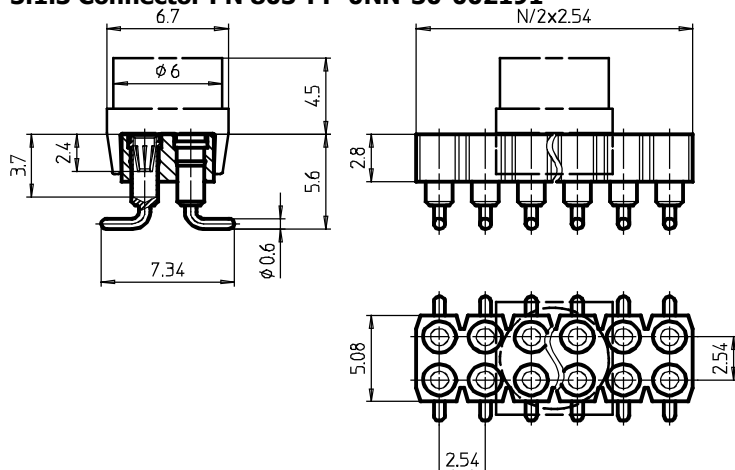3.1.3 Connector PN 803-PP-ONN-30-002191



PCB layout

Available number of pins: 10 to 34

Packaging:

Tape width 56 mm
Pitch on tape 16 mm
Reel diameter 330 mm
Number of pcs per reel: 350
Number of pcs per box: 1050

3.2 Availability

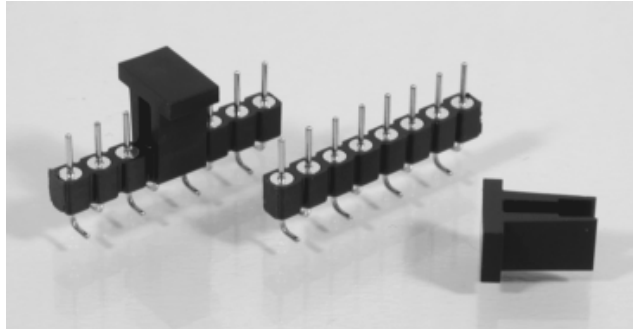
Now

Preci-Dip Durtal SA

CH-2800 Delémont / Switzerland
phone +41 (32) 421 04 00 - fax +41 (32) 421 04 01
mail:sales@precidip.com – www.precidip.com

Pin Connector with Precision machined Contacts for SMD mount Series 350

1. Description and general features



1.1 General description

The Series 350-...-106191 receptacle connectors for vertical SMD mount are now available from PRECI-DIP with Tape & Reel packaging acc. to EIA 481 Standard, and with removable plastic cap for automatic assembly on the PCB.

They come with min 3 poles to max 10 poles. The max. possible number of poles is given by the coplanarity limitations and the tape width of 56 mm, maximum size that PRECI-DIP can process. Further to gold and tin plated version, the connectors are available with Preci-Dip original Bi-Bloc selective plated contacts.

1.2 Advantages

With the additional plastic cap, automatic assembly with standard vacuum nozzle is made possible.

1.3 Applications

Specially recommended for high volume applications on automatic PCB assembly lines.

1.4 Optional versions

Same connector strips also available without Tape & Reel packaging and plastic cap, please see PRECI-DIP catalogue 10.

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 125°C
Climatic Category (IEC)	55 / 125 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact	Machined brass, gold plated 0.25 µm Au or tin plated 5 µm SnPb over 2.5 µm Ni
Insulator	Glass fibre reinforced high temperature polyester PCT, self-extinguishing UL94V-0, colour black

2.3 Mechanical Characteristics

Contact pin	Cylindrical, diameter 0.47 mm
Solder tail	Cylindrical, diameter 0.47 mm
Mechanical life	min.500 cycles
Coplanarity SMD terminations	0.1 mm

2.4 Electrical Characteristics

Operating voltage	100 V _{RMS} / 150 V _{DC}
Continuous operating current	max. 3 A per terminal
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	10'00 V _{RMS}
Air and creepage distances	min. 0.70 mm
Capacitance	max. 0.3 pF


3. Ordering Information

3.1 Dimensions, Order Code Numbers and Packaging Information

Contact Plating Code -PP-:	-10-	Gold 0.25 um	
	-90-	Tin	
	-Z1-	Selective plating:	contacting area gold 0.25 um solder pin, body: tin

Code for number of contacts **-1NN-**: (example for a 6 poles connector: -106-)

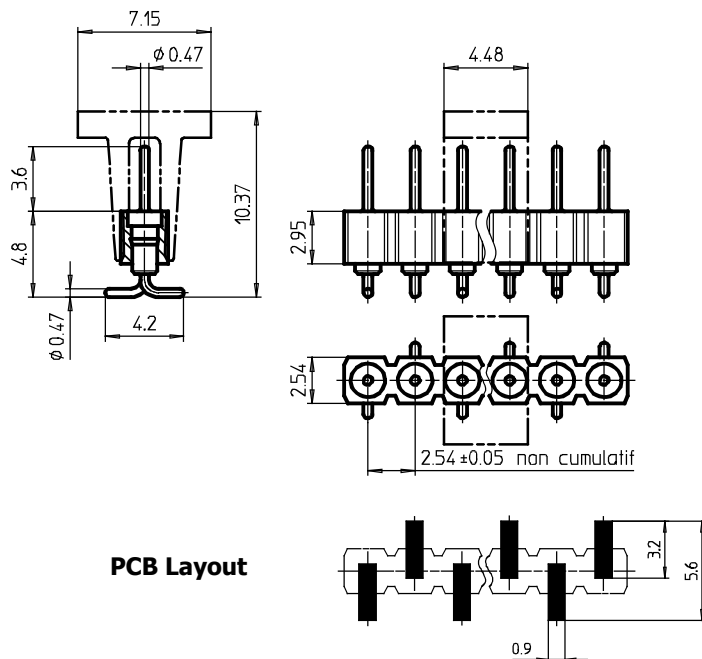3.1.1 Pin Connector, single row, straight solder pin, PN 350-PP-1NN-00-106191



Available number of pins: 3 to 10

Packaging:

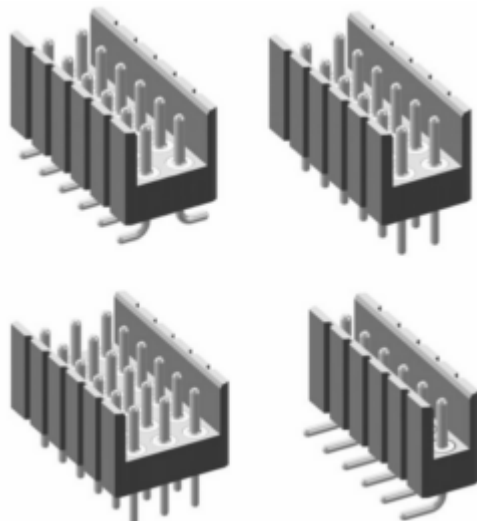
Tape width 44 mm
Pitch on tape 12 mm
Reel diameter 330 mm
Number of pcs per reel: 550
Number of pcs per box: 1100

3.2 Availability

Now

Shrouded Pin Header/Connector with Precision Machined Contacts Series 800 to 804

1. Description and general features



1.1 General description

The series 800 to 804 shrouded pin connectors, introduced by PRECI-DIP to complete its comprehensive range of PCB connectors with 2.54 mm pitch, are equipped with machined pins.

They come in single, double and triple row version with max 32 poles per row.

The available terminations are straight and right angle solder pins, SMD and press-fit solderless.

1.2 Advantages

This pin connectors have all advantages of the machined pins that show a smooth surface in the contact area allowing a high mechanical life, combined with the improved mechanical characteristics of shrouded connector body.

The contacts are available with the original PRECI-DIP selective plating system for machined contacts.

1.3 Applications

Specially recommended for applications with higher mechanical requirements and to help connector mating in places with no direct sight on the connector, such as:

- Equipment for industrial and process control
- Medical equipment
- Automotive electronics

1.4 Optional versions

Currently none

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 125°C
Climatic Category (IEC)	55 / 125 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s (280 °c, 10 S for SMD versions)

2.2 Materials

Contact	Machined brass, 4-5 µm SnPb or 0.25 µm Au over 2.5 µm Ni
Press-Fit contact	Machined bronze, 1-2µm SnPb or 0.25 µm Au over 2.5 µm Ni
Insulator	Glass fibre reinforced high temperature polyester PCT, self-extinguishing UL94V-0, black

2.3 Mechanical Characteristics

Contact pin	Cylindrical, diameter 0.75 mm
Solder tail	Cylindrical, diameter 0.60 mm
Mechanical life	min.500 cycles
Press-Fit compliant pin	Modified "eye of the needle" for PCB holes 1 + 0.09 / - 0.04 mm

2.4 Electrical Characteristics

Operating voltage	100 V _{RMS} / 150 V _{DC}
Continuous operating current	max. 3 A per terminal
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	1000 V _{RMS}
Air and creepage distances	min. 0.70 / 0.85 mm
Capacitance	max. 1 pF

3. Ordering Information

3.1 Dimensions, Order Number Codes and Packaging Information

Contact plating code –PP–:

-10- Gold 0.25 µm

-90- SnPb



-Z1- selective "Bi-bloc" Gold 0.25 µm contacting pin / SnPb termination

Code for number of contacts: -NNN- (example for a 50 poles connector –050–)

Packaging: Standard in box

for SMD connectors, Tape & Reel Packaging on request (min. quantity per order 10'000 pcs)



3.1.1 Pin connector, solder tail



Single row PN 800-PP-NNN-12-002101

Available from 2 to 32 pins



Standard number of pins: 32



Double row PN 802-PP-NNN-12-002101

Available from 4 to 64 pins

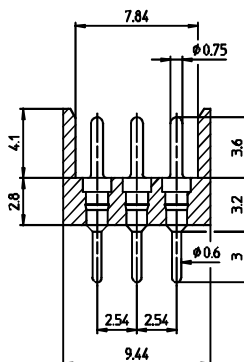Standard number of pins: 64





Triple row PN 804-PP-NNN-12-002101

Available from 9 to 96 pins



Standard number of pins: 96

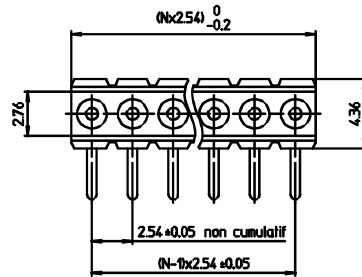3.1.2 Pin connector right angle solder tail





Single row PN 800-PP-NNN-22-002101

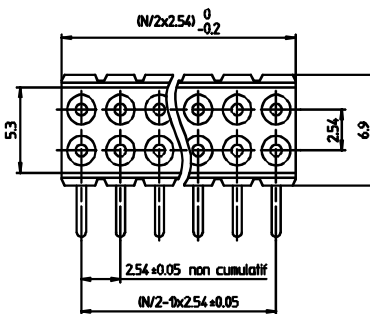Available from 2 to 32 pins
Standard number of pins: 32



Double row PN 802-PP-NNN-22-002101

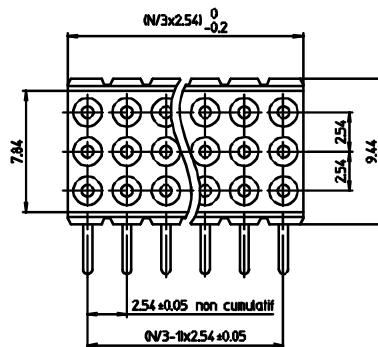

Available from 4 to 64 pins
Standard number of pins: 64



Triple row PN 804-PP-NNN-22-002101

Available from 9 to 96 pins
Standard number of pins: 96


3.1.3 Pin connector SMD vertical mount





Single row PN 800-PP-NNN-32-002101

Available from 3 to 32 pins
Standard number of pins: 32

PCB Layout








Double row PN 802-PP-NNN-32-002101

Available from 4 to 64 pins
Standard number of pins 64

PCB Layout



3.1.4 Pin connector Press-Fit compliant pin





PCB and plated-through hole requirements:

- PCB Material Epoxy-glass laminate FR4 or equivalent
- Thickness 1.5 to 2 mm
- Hole diameter 1 mm + 0.09/-0.06 mm
- Hole metallisation min. 5 µm SnPb over min. 25 µm Cu



Single row PN 800-PP-NNN-6B-002101

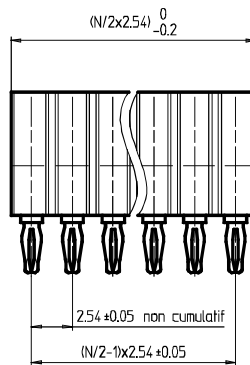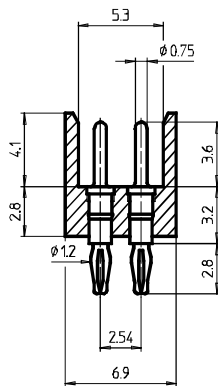Available from 2 to 32 pins
Standard number of pins 32



Double row PN 802-PP-NNN-6B-002101

Available from 4 to 64 pins
Standard number of pins 64



Triple row PN 804-PP-NNN-6B-002101

Available from 9 to 96 pins
Standard number of pins 96

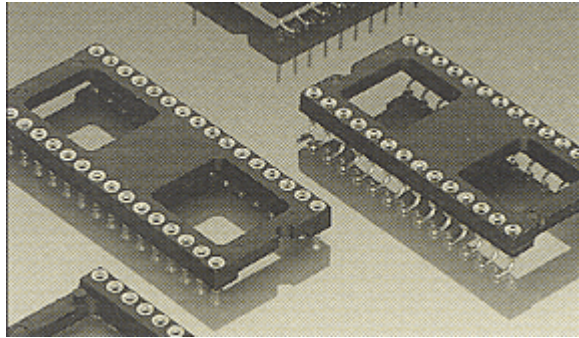
3.2 Availability Now

Preci-Dip Durtal SA

CH-2800 Delémont / Switzerland
phone +41 (32) 421 04 00 - fax +41 (32) 421 04 01
mail:sales@precidip.com – www.precidip.com

DIL socket SMD for automatic assembly Series 110 and 114

1. Description and general features



1.1 General description

The DIL sockets for SMD mount Series 110-...-105191 (with "gull wing" terminations) and 114-...-134191 (with floating pin design) are now available from PRECI-DIP with Tape & Reel packaging acc. to EIA 481 Standard for automatic assembly on the PCB.

The Series 110 come with min. 8 and max. 20 poles and row distance .3" (7.62 mm). The Series 114 come with 8 to 28 poles for row distance .3" (7.62 mm) and 28 poles for row distance .6" (15.24 mm).

The max. possible number of poles is given, for the Series 110 by the coplanarity limitations, and for the Series 114 by the tape width of 56 mm, maximum size that PRECI-DIP can process.

1.2 Advantages

The plastic body with the wide center bar, placed at the top of the socket, is optimised for automatic assembly with standard vacuum nozzle.

1.3 Applications

Specially recommended for high volume applications on automatic PCB assembly lines.

1.4 Optional versions

Same sockets also available without Tape & Reel packaging, please see PRECI-DIP catalogue 10.

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 125°C
Climatic Category (IEC)	55 / 125 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact body	Machined brass, plating 5 µm SnPb over 2.5 µm Ni
Contact spring	BeCu, plated 5 µm SnPb or gold (0.1, 0.25 or 0.75 µm) over Ni
Insulator	Glass fibre reinforced high temperature polyester PCT, self-extinguishing UL94V-0, colour black

2.3 Mechanical Characteristics

Accepts pins	Diameter 0.40 to 0.56 mm
SMD solder tail	Gull wing: cylindrical 0.52 mm diameter Floating pin: diameter 1 mm
Coplanarity SMD Terminations	Gull wing: 0.1 mm The floating pins are self-aligning within 0.3 mm to the surface of the PCB
Mechanical life	min. 500 cycles

2.4 Electrical Characteristics

Operating voltage	100 V _{RMS} / 150 V _{DC}
Continuous operating current	max. 1 A per terminal
Contact resistance	max. 10 mΩ
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	1000 V _{RMS}
Air and creepage distances	min. 0.6 mm
Capacitance	max. 0.3 pF


3. Ordering Information

3.1 Dimensions, Order Number Codes and Packaging Information

Contact Plating Code –PP–:

	body	spring
-91-	SnPb	Gold 0.25 um
-93-	SnPb	Gold 0.75 um
-99-	SnPb	SnPb

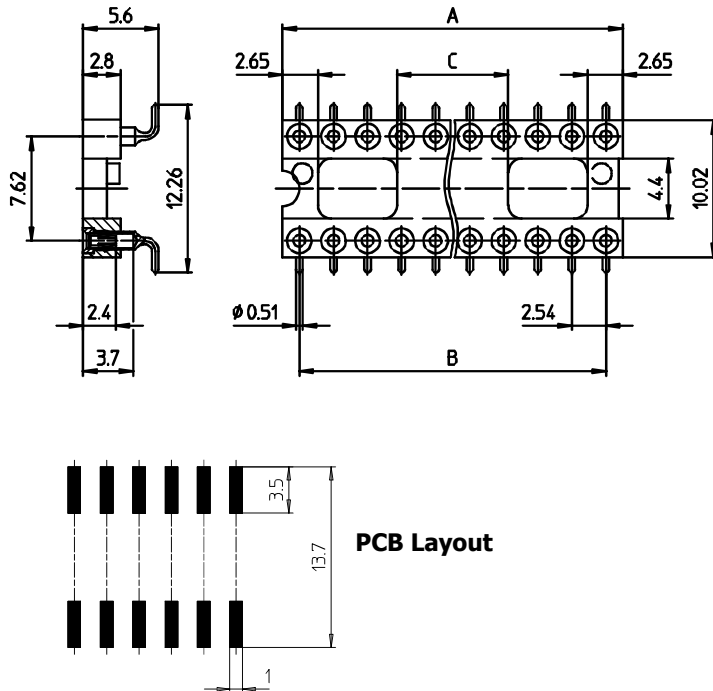3.1.1 SMD socket Gull-wing PN 110-PP-3NN-41-105191



Available number of pins: 8, 14, 16, 18 and 20

Code Number of Contacts –3NN–


Dimensions[mm]:

Number of pins	A	B	C
308	10.1	3 x 2.54	10.1
314	17.8	6 x 2.54	5.3
316	20.3	7 x 2.54	5.3
318	22.9	8 x 2.54	5.3
320	25.4	9 x 2.54	8.3

Packaging:

	308	314 to 320
Tape width	24 mm	44 mm
Pitch on tape	16 mm	20 mm
Reel diameter	330 mm	330 mm
Number of pcs per reel:	700	550
Number of pcs per box:	2100	2200

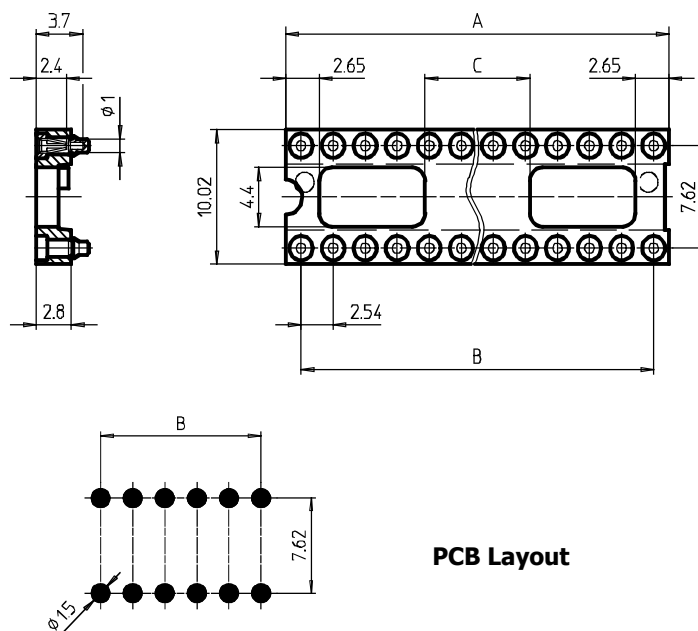3.1.2 SMD socket floating-pin PN 114-PP-3NN-41-134191



Available number of pins: 8, 14, 16, 18, 20, 24 and 28

Code Number of Contacts –3NN–


Dimensions[mm]:

Number of pins	A	B	C
308	10.1	3 x 2.54	10.1
314	17.8	6 x 2.54	5.3
316	20.3	7 x 2.54	5.3
318	22.9	8 x 2.54	5.3
320	25.4	9 x 2.54	8.3
324	30.4	11 x 2.54	8.3
328	35.6	13 x 2.54	8.3

Packaging:

	308 to 328
Tape width	56 mm
Pitch on tape	16 mm
Reel diameter	330 mm
Number of pcs per reel:	800
Number of pcs per box:	2400

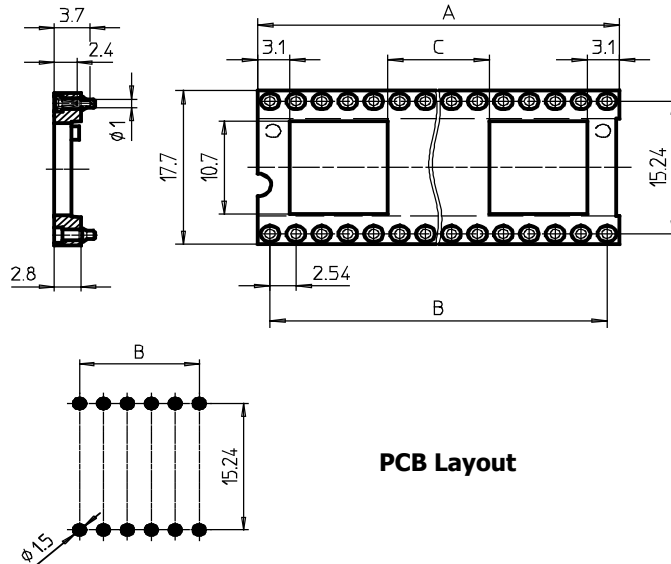3.13 SMD socket floating pin PN 114-PP-6NN-41-134191



Available number of pins: 28

Code Number of Contacts –6NN–

Dimensions[mm]:

Number of pins	A	B	C
628	35.5	13 x 2.54	10

Packaging:

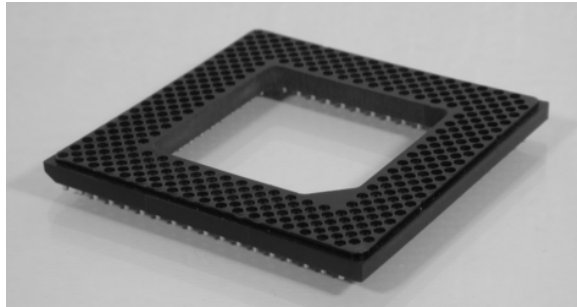
Tape width 56 mm
Pitch on tape 24 mm
Reel diameter 330 mm
Number of pcs per reel: 400
Number of pcs per box: 1200

3.2 Availability

Now

SMD Sockets for interstitial Pin Grid Arrays Series 514-...154

1. Description and general features



1.1 General description

Interstitial PGA sockets come with floating SMD contacts which are self-adjusting with the solder pads, even with slightly distorted PCBs.

The contact diameter at the soldering end is 0.8 mm, allowing solder pads of 0.9 mm diameter which leaves sufficient space between the connections for the conductive paths of the circuit.

1.2 Advantages

Interstitial PGA sockets are adapted to new Pin Grid Array microcircuit packages with high contact density and make an optimal interface connection to SMD PCBs, avoiding the combination of SMD components with parts requiring through hole connections on the same circuit. This greatly improves the efficiency of the assembling and soldering processes.

1.3 Applications

SMD printed circuit assemblies of all kinds requiring integration of components having PGA packages. Specially recommended for manufacturing equipment with high production rates.

1.4 Optional versions

Optional version with positioning pins available on request

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 125°C
Climatic Category (IEC)	55 / 125 / 21
Solderability	235°C, 10s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact body	Machined brass, plating 5 µm SnPb over 2.5 µm Ni
Contact spring	BeCu, gold plated (0.1, 0.25 or 0.75 µm) over Ni
Insulator	Glass fibre reinforced high temperature polyester PCT, self-extinguishing UL94V-0, colour black

2.3 Mechanical Characteristics

Insertion force (initial)	0.6 N max. / 0.35 N typical, with polished steel gauge Ø 0.46 mm
Withdrawal force (initial)	0.15 N min / 0.2 N typical with polished steel gauge Ø 0.46 mm
Contact spring (clip) retention	40 N minimum
Mechanical life	100 cycles

2.4 Electrical Characteristics

Operating voltage	100 V _{RMS} / 150 V _{DC}
Continuous operating current	max. 1 A per terminal
Contact resistance	max. 10 mΩ
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	700 V _{RMS}
Air and creepage distances	min. 0.3 mm
Capacitance	max. 1 pF
Self inductance	2 nH max.

3. Ordering Information

3.1 Dimensions, Order Code Numbers and Packaging Information


Contact Plating Code –PP-:	body	spring
-91-	SnPb	Gold 0.25 um
-93-	SnPb	Gold 0.75 um
-97-	SnPb	Flash gold

Code for number of contacts –NNN- = total number of contacts

Code for wafer size –XX-: available for 14 and from 17 to 22

Code for contact arrangement and window size –YYY-: see Preci-Dip catalog

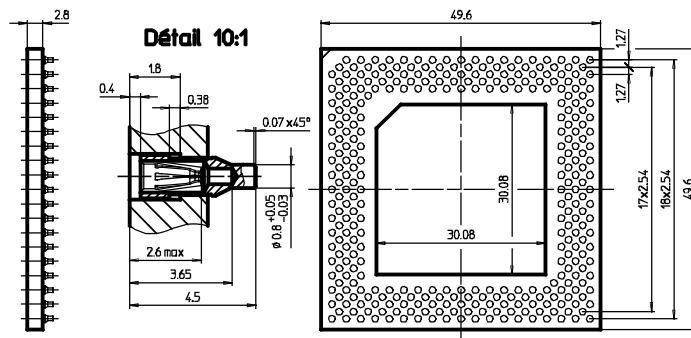3.1.1 PGA socket PN 514-PP-NNN-XX-YYY154




3.3 Availability

Now

Press-fit Mount Sockets for Interstitial Pin Grid Arrays Series 546-...147

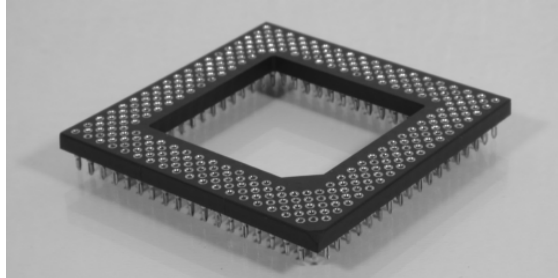1. Description and general features



1.1 General description

Press-fit mount interstitial PGA sockets come with solderless press-fit terminations. This product line is based on the standard press-fit PGA sockets.

The press-fit terminations are a modified version of the «eye of the needle» technology, but adapted to PCB plated through holes with 0.7 mm diameter after metallisation.

1.2 Advantages

With only 0.85 mm drill dia. the space available for the conductive paths passing between contacts increases by 30% which greatly facilitates the PCB layout.

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 125°C
Climatic Category (IEC)	55 / 125 / 21
Solderability	NA
Resistance to soldering heat	NA

2.2 Materials

Contact body	Machined bronze, plating 5 µm SnPb over 2.5 µm Ni
Contact spring	BeCu, gold plated (0.1, 0.25 or 0.75 µm) over Ni
Insulator	Glass fibre reinforced high temperature polyester PCT, self-extinguishing UL94V-0, colour black

Assembly of this new PGA is as easy as with the other press-fit versions and the tooling requirements are quite simple: a tool head of the flat rock type, and a support plate with the same hole configuration as the PCB.

Solderless press-fit technology eliminates the second soldering process normally necessary on PCBs with mixed technology which means that thermal stress on the components is cut to half.

Press-fit connections have excellent long term stability and are recommended for use under difficult environmental conditions.

1.3 Applications

Most benefits when used in SMD electronic assemblies and sub-assemblies where components in PGA packages cannot be replaced.

Covers all of the currently used interstitial PGA configurations, particularly those of the Pentium microprocessor family and the most common ASICs

1.4 Optional versions

Sockets with press-fit terminations for PCB holes of 0.9 +0.07/-0.05 mm diameter are available on request.

2.3 Mechanical Characteristics

Insertion force (initial)	0.6 N max. / 0.35 N typical, with polished steel gauge Ø 0.46 mm
Withdrawal force (initial)	0.15 N min / 0.2 N typical with polished steel gauge Ø 0.46 mm
Contact spring (clip) retention	40 N minimum
Mechanical life	100 cycles

2.4 Electrical Characteristics

Operating voltage	100 V _{RMS} / 150 V _{DC}
Continuous operating current	max. 1 A per terminal
Contact resistance	max. 10 mΩ
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	700 V _{RMS}
Air and creepage distances	min. 0.3 mm
Capacitance	max. 1 pF

3. Ordering Information

3.1 Dimensions, Order Code Numbers and Packaging Information


Contact Plating Code –PP–:	body	spring
-91-	SnPb	Gold 0.25 µm
-93-	SnPb	Gold 0.75 µm
-97-	SnPb	Flash gold

Code for number of contacts –NNN– = total number of contacts

Code for wafer size –XX–: available for 14 and from 17 to 22

Code for contact arrangement and window size –YYY–: see Preci-Dip catalog

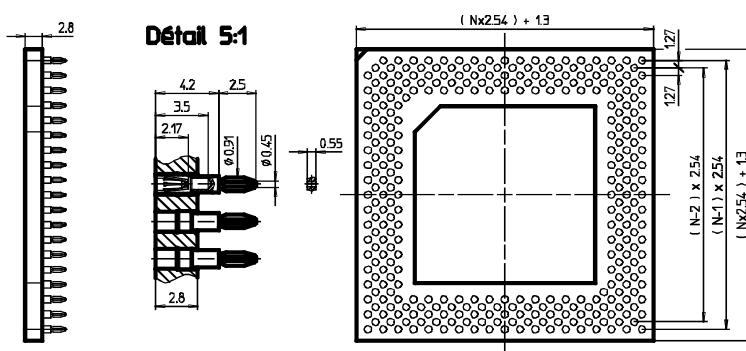3.1.1 PGA socket PN 546-PP-NNN-XX-YYY147



Press-fit characteristics

(PCB and plated trough-hole specification)

PCB material: Epoxy-glass laminate FR4 or equivalent

Board thickness 1.2 – 2.5 mm

Drill diameter 0.85 +/-0.025 mm

Hole diameter 0.7 +0.07/-0.05 mm after metallisation

Hole metallisation 5 µm min. SnPb over 25 µm Cu

Push-in force 50 N average with 0.7 mm diameter hole; 80 N max. with min. diameter hole

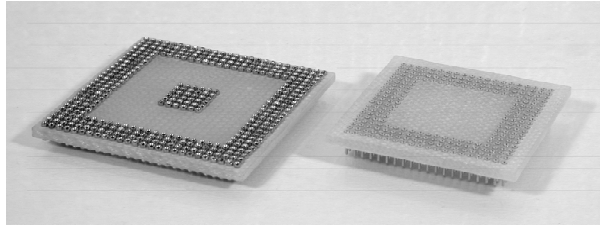
Push-out force 25 N average with 0.7 mm diameter hole; 10 N min. with max diameter hole

3.2 Availability

Now

Sockets and adapter for 1.27 mm Ball Grid Array Series 514, 550 and 558

1. Description and general features



1.1 General description

The BGA adapter is a two part socket design for applications where direct soldering of the device cannot be accepted. The two components are:

- a SMD socket with floating contacts with the same footprint as the BGA device.
- an adapter with solder pads for the balls on the top side and pins on the bottom side.

The BGA is soldered on the adapter and then can be plugged into the sockets attached to the PCB.

For interconnect applications, the SMD PCB adapter is soldered to the daughter board, making it pluggable into the socket soldered to the mother board

1.2 Advantages

The best way to make BGA pluggable on PCB without layout design change.

The socket and PCB adapter provide a high density and low profile board interconnect system.

1.3 Applications

For testing, debugging and pre-productions runs of boards with BGA devices, and for PCB interconnection.

1.4 Optional versions

BGA socket and adapter with 1.50 mm grid.

PCB adapter with through hole terminations and 1.27 mm grid Series 558-...-101.

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 125°C
Climatic Category (IEC)	55 / 125 / 21
Solderability	235°C, 10s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Socket contact body	Machined brass, plating 5 µm SnPb over 2.5 µm Ni
Contact spring	BeCu, gold plated gold (0.25 or 0.75 µm) over Ni
Adapter pin	Machined brass, plating 0.25 µm gold over 2.5 µm Ni
Insulator	Glass-epoxy laminate FR4, self-extinguishing UL94V-0

2.3 Mechanical Characteristics

Insertion force (initial)	0.3 N max. / 0.2 N typical, with polished steel gauge Ø 0.43 mm
Withdrawal force (initial)	0.07 N min / 0.1 N typical with polished steel gauge Ø 0.43 mm
Contact spring (clip) retention	20 N minimum
Mechanical life	100 cycles
Coplanarity	0.1 mm

2.4 Electrical Characteristics

Operating voltage	50 V _{RMS} / 60 V _{DC}
Cont. operating current	max. 1 A per terminal
Contact resistance	max. 10 mΩ
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	500 V _{RMS}
Air and creepage distances	min. 0.17 mm
Capacitance	max. 1 pF
Self inductance	2 nH max.

3. Ordering Information

3.1 Dimensions, Order Code Numbers and Packaging Information

Code for number of contacts –NNN- = total number of contacts

Code for wafer size –XX-: available from 16 to 35

Code for contact arrangement –YYY-: please consult

3.1.1 BGA socket PN 514-PP-NNNMXX-YYY148

Contact Plating Code –PP-:

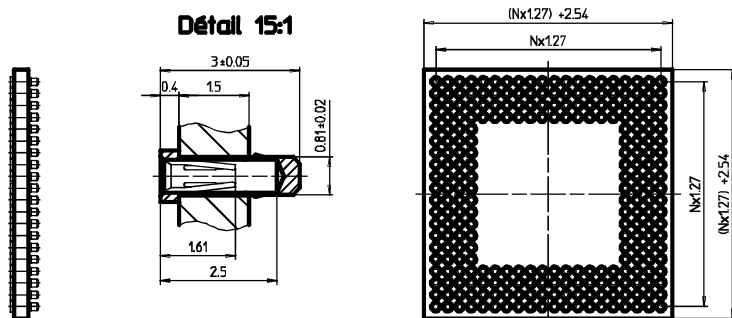
-91-

-93-

body spring

SnPb Gold 0.25 um

SnPb Gold 0.75 um




3.1.2 BGA adapter PN 550-PP-NNNMXX-YYY166

Contact Plating Code –PP-:

-10-

pin

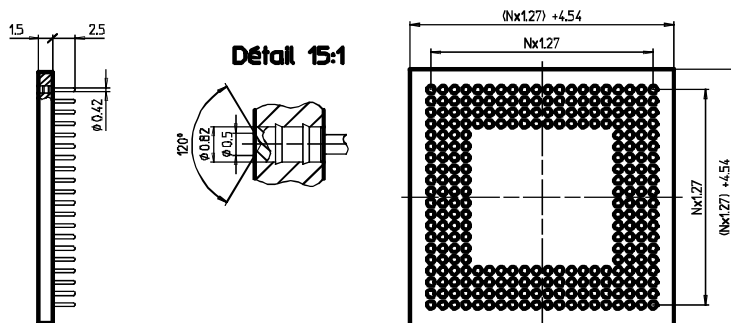Gold 0.25 um




3.1.3 PCB adapter PN 558-PP-NNNMXX-YYY104

Contact plating code –PP-:

-10-

pin

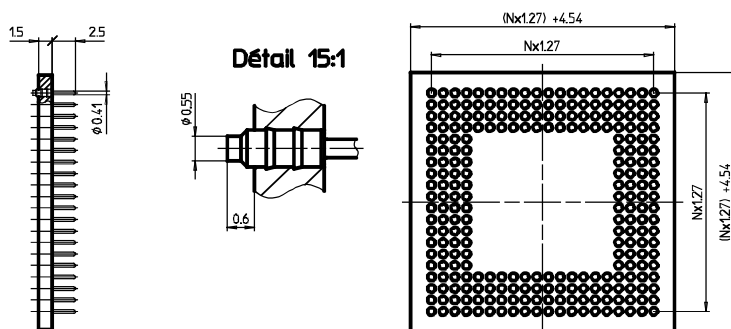Gold 0.25 um



3.2 Availability

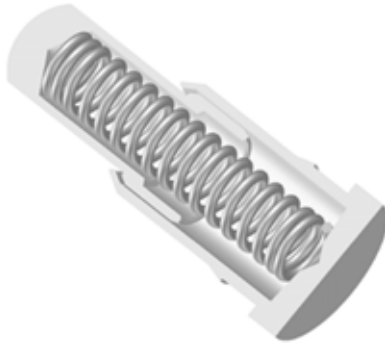
Now

Preci-Dip Durtal SA

CH-2800 Delémont / Switzerland
 phone +41 (32) 421 04 00 - fax +41 (32) 421 04 01
 mail:sales@precidip.com – www.precidip.com

Low Profile Spring Loaded Contact

1. Description and general features



1.1 General description

Miniature, low profile, spring loaded SMD contact for applications demanding high current capacity, low electrical contact resistance and high cycle count.

Contact height available from 3.50 to 7.5 mm at initial position.

1.2 Advantages

Screw-machined pogo contact design optimised for low electrical contact resistance and high current capacity.

SMD contact with min. PCB space requirements.

Long working stroke (1.4 mm) despite of low profile.

1.3 Applications

Best solution for battery or battery loader connector for:

- mobile telephone and radio
- portable data processing and data acquisition equipment
- medical equipment
- test and measurement equipment
-

1.4 Optional versions

Currently none

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 85°C
Climatic Category (IEC)	55 / 85 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact piston	Machined brass, plating 0.5 µm Au over 2.5 µm Ni
Contact termination	Machined brass, plating 0.5 µm Au over 2.5 µm Ni
Spring	Music wire, plating Flash Au

2.3 Mechanical Characteristics

Total working travel	1.4 mm 1.15 mm for initial height 4.5 mm
Spring force (initial)	0.25 N
Spring force (at nominal position)	0.60 N at 0.7 mm stroke
Mechanical life	min. 40'000 cycles

2.4 Electrical Characteristics

Operating voltage	100 V _{RMS} / 150 V _{DC}
Operating current (per terminal)	max. 2 A continuous max. 3 A peak
Contact resistance	max. 20 mΩ

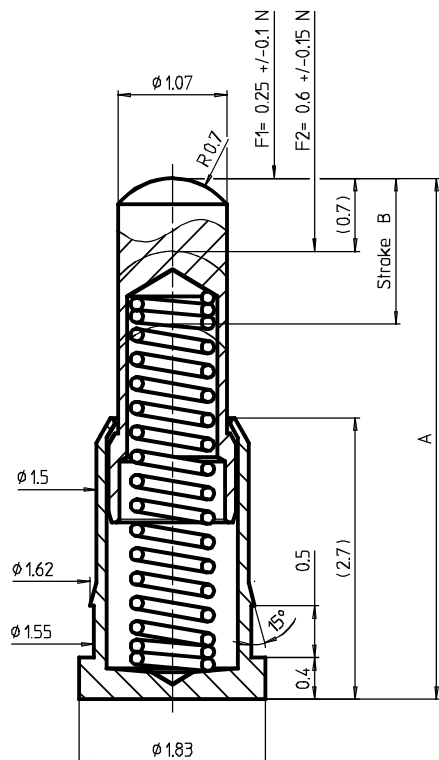
3. Ordering Information

3.1 Dimensions, Order Code Numbers and Packaging Information

Contact Plating Code: only available in the above given combination as standard

Packaging: Standard packaging: in box

3.1.1 Low profile SMD spring loaded Contact PN 900xx-AS



Initial height A [mm]	Stroke B [mm]	Part Number
3.50	1.00	90041-AS
4.25	1.40	90022-AS
4.5	1.40	90023-AS
5	1.40	90024-AS
5.5	1.40	90025-AS
6	1.40	90026-AS
6.5	1.40	90027-AS
7	1.40	90028-AS
7.5	1.40	90029-AS

3.2 Availability

Now

Spring Loaded Contact

1. Description and general features



1.1 General description

Miniature spring loaded contact with minimum diameter for applications demanding high current capacity, low electrical contact resistance and high cycle count.

Outside diameter smaller than 1 mm allowing contact arrangement on pitch as small as 1.25 mm for multiway connector.

1.2 Advantages

Screw-machined pogo contact design with internal sliding contact spring, optimised for low electrical contact resistance and high current capacity.

Contact termination PCB solder pin and solder cup for wire attachment.

Long working stroke: 1.4 mm.

1.3 Applications

Best solution for miniature high cycle count connectors in mobile and portable applications:

- mobile telephone and radio
- portable data processing and data acquisition equipment
- medical equipment
- test and measurement equipment
-

1.4 Optional versions

Currently none

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 85°C
Climatic Category (IEC)	55 / 85 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact piston	Machined brass, plating 0.5 µm Au over 2.5 µm Ni
Contact termination	Machined brass, plating 5 µm SnPb over 2.5 µm Ni
Spring	Stainless steel

2.3 Mechanical Characteristics

Total working travel	1.4 mm
Spring force (initial)	0.25 N
Spring force (at nominal position)	min. 0.80 N at 1 mm stroke
Mechanical life	min. 40'000 cycles

2.4 Electrical Characteristics

Operating voltage	100 V _{RMS} / 150 V _{DC}
Operating current (per terminal)	max. 1 A continuous max. 2 A peak
Contact resistance	max. 20 mΩ

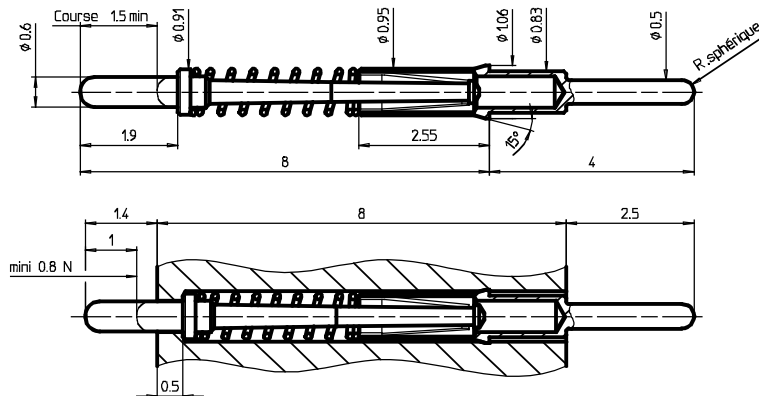
3. Ordering Information

3.1 Dimensions, Order Code Numbers and Packaging Information

Contact Plating Code: only available in the above given combination as standard

Packaging: Standard packaging: box


3.1.1 Spring loaded Contact, ultra thin with straight solder pin termination PN 90014-AS



Main dimensions

Recommendation for contact cavity

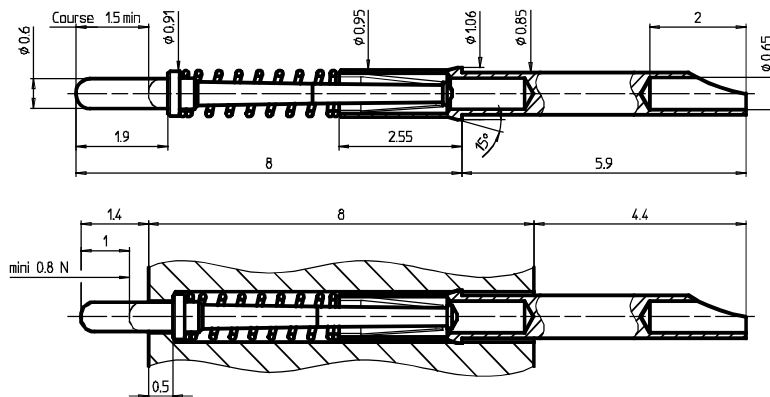3.1.2 Spring loaded Contact, ultra thin with solder cup termination PN 90049-AS



Main dimensions

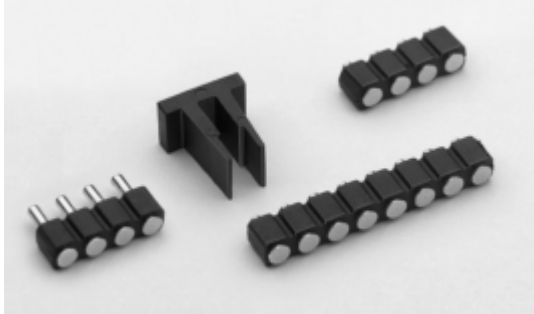
Recommendation for contact cavity

3.2 Availability

Now

Modular Low Profile Spring Loaded Connector Series 811 and 813

1. Description and general features



1.1 General description

Miniature spring loaded connector for applications demanding high current capacity, low electrical contact resistance and high cycle count.

Protected pogo contacts with high mechanical strength.

Modular systems with a contact pitch of 2.54 mm, with max. 10 contacts on one row or max. 20 contacts on a double row arrangement.

Connector height available from 4.5 to 7.5 mm at initial position.

Available with Tape & Reel packaging and plastic cap for automatic assembly with vacuum nozzle.

1.2 Advantages

Screw-machined pogo contact design optimised for low electrical contact resistance and high current capacity.

SMD connector with min. PCB space requirements.

Long working stroke (1.4 mm) despite of low profile.

1.3 Applications

The modular design makes these connectors the ideal solution for low to medium volume applications.

Best solution for battery or battery loader connector for:

- mobile telephone and radio
- portable data processing and data acquisition equipment
- medical equipment
- test and measurement equipment

1.4 Optional versions

Currently none

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 85°C
Climatic Category (IEC)	55 / 85 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact piston	Machined brass, plating 0.5 µm Au over 2.5 µm Ni
Contact termination	Machined brass, plating 0.5 µm Au over 2.5 µm Ni
Spring	Music wire, plating Flash Au
Insulator	Glass fibre reinforced high temperature polyester PCT, self-extinguishing UL94V-0, colour black

2.3 Mechanical Characteristics

Total working travel	1.4 mm 1.15 mm for initial height 4.5 mm
Spring force (initial)	0.25 N
Spring force (at nominal position)	0.60 N at 0.7 mm stroke
Coplanarity SMD terminations	0.1 mm
Mechanical life	min. 40'000 cycles

2.4 Electrical Characteristics

Operating voltage	100 V _{RMS} / 150 V _{DC}
Operating current (per terminal)	max. 2 A continuous max. 3 A peak
Contact resistance	max. 20 mΩ
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	700 V _{RMS}
Air and creepage distances	min. 0.7 mm
Capacitance	max. 1 pF

3. Ordering Information

3.1 Dimensions, Order Code Numbers and Packaging Information

Contact Plating Code: only available in the above given combination as standard

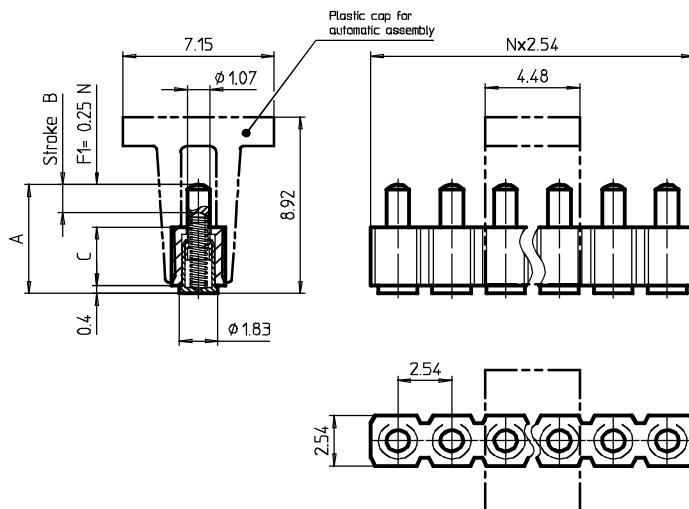
Code for number of contacts: -0NN- (example for an 8 poles connector: -008-)

Packaging:

Standard packaging: in box: replace xxx by suffix 101 to part number

Tape & Reel packaging: with plastic cap for automatic assembly with vacuum nozzle: replace xxx by suffix 191 to part number. Available number of pins see below. Other number of pins on request (min. quantity 10'000pcs)

3.1.1 Single row SMD mount Connector 811-SS-0NN-30-00xxx




Available Number of Pins: 2 to 10

Initial height A [mm]	Plastic Body C [mm]	Part Number
4.5	2.95	811-SS-0NN-30-001xxx
5	2.95	811-SS-0NN-30-002xxx
5.5	2.95	811-SS-0NN-30-003xxx
6	4	811-SS-0NN-30-004xxx
6.5	4	811-SS-0NN-30-005xxx
7	4	811-SS-0NN-30-006xxx
7.5	4	811-SS-0NN-30-007xxx

T&R Packaging:	-001191	-002191 to -007191
Avail. Number of pins	2 to 4	2 to 10
Tape width	16 mm	44 mm
Pitch on tape	8 mm	12 mm
Reel diameter	330 mm	330 mm
Number of pcs per reel:	1300	600
Number of pcs per box:	7500	2400

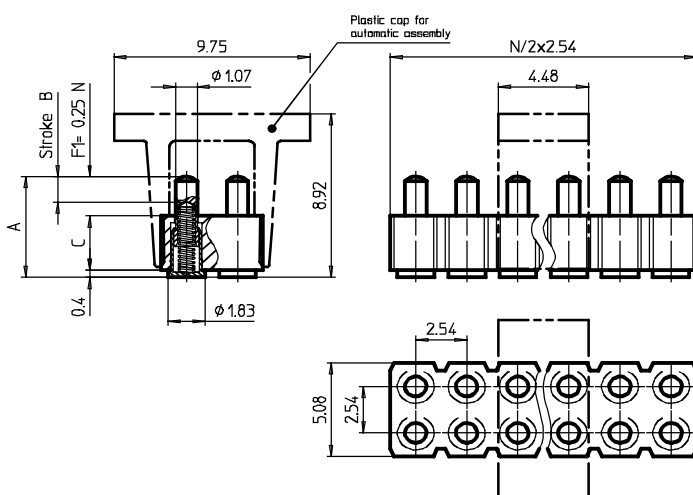3.1.2 Double row SMD mount Connector 813-SS-0NN-30-00xxxx



Available Number of Pins: 4 to 20

Initial height A [mm]	Plastic Body C [mm]	Part Number
4.5	2.95	813-SS-0NN-30-001xxx
5	2.95	813-SS-0NN-30-002xxx
5.5	2.95	813-SS-0NN-30-003xxx
6	4	813-SS-0NN-30-004xxx
6.5	4	813-SS-0NN-30-005xxx
7	4	813-SS-0NN-30-006xxx
7.5	4	813-SS-0NN-30-007xxx

T&R Packaging:	-001191 to -007191
Avail. Number of pins	4 to 16
Tape width	32 mm
Pitch on tape	12 mm
Reel diameter	330 mm
Number of pcs per reel:	600
Number of pcs per box:	1800

3.2 Availability

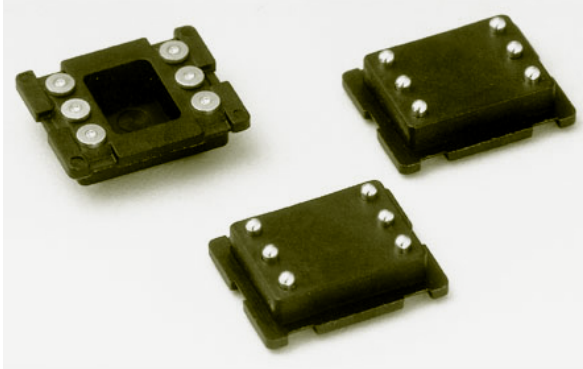
Now

Preci-Dip Durtal SA

CH-2800 Delémont / Switzerland
 phone +41 (32) 421 04 00 - fax +41 (32) 421 04 01
 mail:sales@precidip.com – www.precidip.com

Chip Card Spring Loaded Connector 8PM-SS-0006-01-913

1. Description and general features



1.1 General description

Miniature connector for standard or miniature sized chip cards with contacting pads according to ISO 7816
Protected, machined pogo contacts with high life and low electrical contact resistance.

Basic model for SMD mount without cover or locking device for free integration into the application.
Available with Tape & Reel packaging for automatic assembly.

1.2 Advantages

The connector, equipped with screw-machined pogo contacts, is covering a minimum PCB area, only 12.2 x 9.7 mm².

The very low profile with a typical working height of only 3.75 mm is combined with an improved working stroke of 1 mm.

1.3 Applications

Particularly well adapted for all kind of mobile equipment where space is a critical factor.

1.4 Optional versions

Currently none.

2. Technical Specifications

2.1 Environmental

Operating temperature	-55 ... + 85°C
Climatic Category (IEC)	55 / 85 / 21
Solderability	235°C, 5s
Resistance to soldering heat	280°C, 10s

2.2 Materials

Contact piston	Machined brass, plating 0.4 µm Au over 2.5 µm Ni
Contact termination	Machined brass, plating 0.4 µm Au over 2.5 µm Ni
Spring	Music wire, plating Flash Au
Insulator	Glass fibre reinforced high temperature polyester PCT, self-extinguishing UL94V-0, colour black

2.3 Mechanical Characteristics

Total working travel	1 mm
Spring force (initial)	0.25 N
Spring force (at nominal position)	0.60 N at 0.7 mm stroke
Coplanarity SMD terminations	0.1 mm
Mechanical life	min. 40'000 cycles

2.4 Electrical Characteristics

Operating voltage	100 V _{RMS} / 150 V _{DC}
Operating current (per terminal)	max. 2 A continuous max. 3 A peak
Contact resistance	max. 20 mΩ
Insulation resistance	10'000 MΩ (after climatic tests)
Dielectric strength	500 V _{RMS}
Air and creepage distances	min. 0.7 mm
Capacitance	max. 1 pF


3. Ordering Information

3.1 Dimensions, Order Number Code and Packaging Information

PN 8PM-SS-0006-01-913

Contact plating code: only available in the above given combination as standard

Packaging:	Tape & Reel:	Tape width	24 mm
		Pitch on tape	12 mm
		Reel diameter	330 mm
		Number of pcs per reel	1300
		Number of pcs per box	3900

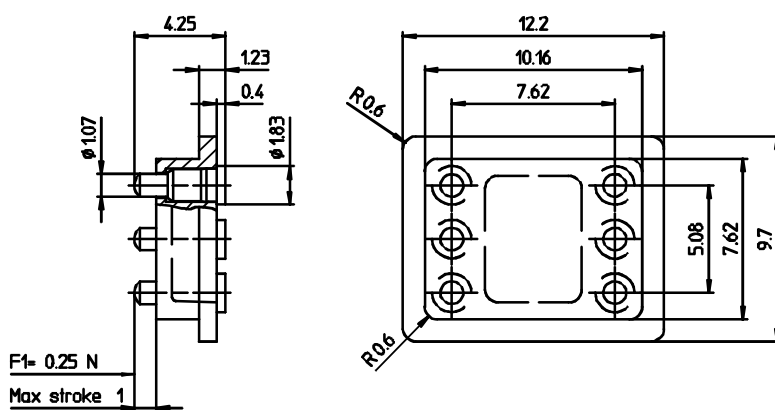

3.2 Availability

Now