

AN013



Protection for data and signal lines in Intrinsically Safe circuits

Application Note AN013 for data and signal line protectors ESP SL15X and ESP SL30X



Protection for data and signal lines in Intrinsically Safe circuits

Industries such as petrochemical, oil & gas or pharmaceutical face a daily challenge to protect people and property at risk from potentially explosive atmospheres.

These atmospheres create hazardous areas, where air mixes with inflammable materials, such as gases, powders, or dusts (for example, petrol fumes during oil refinery), which would combust if ignited.

Hazardous areas must be protected against the risk that a spark or other source of ignition would cause an explosion.

Electrical equipment and systems (such as process control units) therefore present a considerable risk to safety, as they may be subjected to transient overvoltages from lightning or switching events.

Intrinsic Safety/Ex i

A major approach to protecting hazardous areas from dangerous sparking is known as **Intrinsic Safety (IS)**.

Within an IS environment, sparks from electrical equipment and circuitry are prevented through the use of **IS Barriers**, which limit the available electrical energy that could cause an explosion, to below ignition threshold.

IS Barriers are NOT surge protectors but field instruments which are themselves AT RISK from transient overvoltages.

IS circuits therefore need to be protected from transient overvoltages by a suitable (ATEX approved) surge protector.

IEC/ATEX Directives

The IEC and the EU, through the publication of two ATEX Directives, have introduced specifications for determining hazardous areas, and product suitability for use in IS environments.

ATEX Directive **94/9/EC** covers equipment and protective systems for potentially explosive atmospheres and the health & safety requirements to which they must conform.

Directive **1999/92/EC** covers health & safety of employees at risk from explosive atmospheres and requires the avoidance of ignition in explosive atmospheres, where these atmospheres cannot be fully prevented.

The IEC has established a classification of gases (3 groups: IIA – IIB – IIC), and of temperatures for material used in zones at risk of explosion (6 groups: T1 to T6).

Products for hazardous areas are classified in line with IEC & ATEX to gas group & temperature for application within specific hazardous area zones (see Zone and EX i classification tables opposite).

Gaseous hazardous area zones are defined based on the expectation of a potentially explosive atmosphere occurring:

Zone 0	Hazard is continuously present, for long periods or frequently (> 1000 hours per year)
Zone 1	Hazard is likely to arise occasionally during normal operation (10 – 1000 hours per year)
Zone 2	Hazard is not likely to arise during normal operation, or is of short duration only (< 10 hours per year)
SAFE AREA	No hazard is present

Symbol	Suitable for	Category	Tested to
Ex ia	Zones 0, 1, 2	1	EN 50020
Ex ib	Zones 1 & 2	2	EN 50039

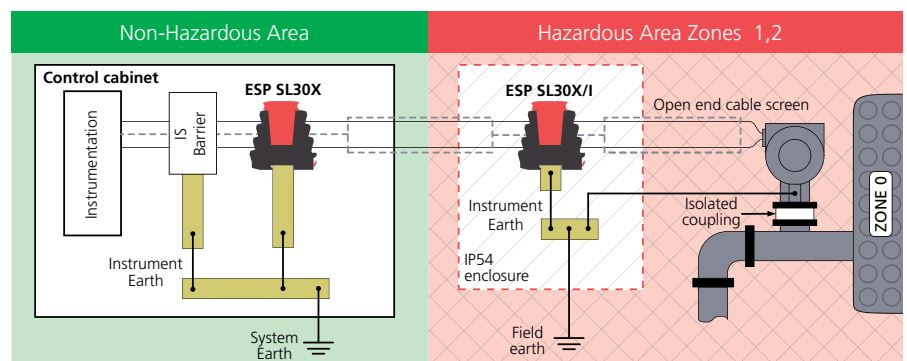


Figure 1: The ESP SL30X Series can provide protection for the instrumentation as well as providing protection for the IS Barrier. The isolated screen version (ESP SL30X/I) should be used in Zone 1, 2.



Protecting data & signal lines

Surge Protection Devices (SPDs) must be installed at all lightning protection boundaries, in line with BS EN/IEC 62305, to protect against transient overvoltages.

Similarly, IS circuits require surge protection at the boundary between the hazardous and non-hazardous area - see *Figure 1*.

Furse ESP SL**X Series protectors are approved for use in hazardous areas to protect IS circuits and have a group IIC T4 certification, for use with all gas/air mixtures (Classification: **Ex II 2 (1) G, Ex ia [ia Ga] IIC T4 Gb**).

These protectors are suitable for high speed digital communication equipment or systems with long signal lines, where a large number of wires require protection (e.g. process control, 4 – 20 mA loops, fire and gas detectors and shut down systems).

Protectors offer negligible self-capacitance and self-inductance for minimal interference when protecting IS circuits.

Note: ESP SLX protectors provide surge protection on IS circuits only and do not replace the IS barrier itself.**

Installation


Field instrument protection should take place in Zone 1 and as close as practically possible to the Zone 0 boundary, preferably within 1 m to prevent transient overvoltages from entering Zone 0.

The SPD must be housed in the field instrument, or within a suitable protective enclosure, mounted on a separate 35 mm DIN rail to the IS Barriers.

The SPD must be connected in-line (series) with the data communication, signal, measurement, or telephone line, with the dirty *line* end of the protector connected to the cable carrying the incoming transient overvoltages - see *Figure 2*.

Cables connected to the *clean* end should never be routed next to dirty *line* cables or dirty barrier earth bonds. If rows of SPDs are installed close to each other, dirty *line* cables (and earth bonds) must be kept at least 5 cm apart from *clean* cables - refer to installation instructions for further information.

The SPD must not be subjected to thermal and/or mechanical stresses in excess of those permitted in the certification documentation, nor installed in a location where it may be attacked by aggressive substances. Protect from excessive dust, moisture and other contaminants by a suitable enclosure.

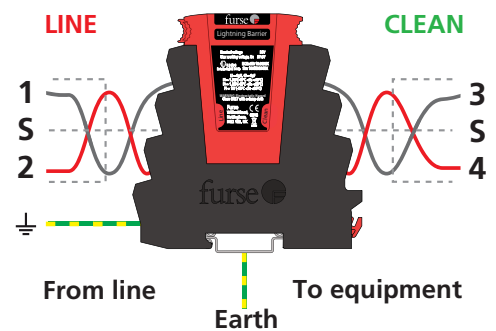

*Figure 2: Series connection of ESP SL**X surge protectors.*

Product specification	ESP SL15X, ESP SL15X/I	ESP SL30X, ESP SL30X/I
Protection level ¹	Combined Category D, C, B	Combined Category D, C, B
Protection boundary	LPZ 0 _B to LPZ 3	LPZ 0 _B to LPZ 3
Maximum working voltage U_C	15 V	30 V
Current rating	750 mA	750 mA
Line resistance	1 Ω	1 Ω
Bandwidth (-3 dB)	> 85 Mhz	> 85 Mhz
Approval references: IECEx SIR 10.0030X, Sira 10ATEX2063X		¹ tested to BS EN/IEC 61643-21

Lightning protection SPDs in hazardous areas must only be installed, operated and maintained by competent personnel.

SPDs for data and signal lines should form part of an overall Lightning Protection System for the site, including mains surge protection, structural lightning protection, and an appropriate earthing system, as required.

For further information, contact Furse.

Full specifications of all of the products in the Furse ESP range of transient overvoltage protectors can be found in the Total Solution Product Catalogue.



To request a copy, contact Furse Sales at the address opposite.

Full product data can be downloaded in PDF form from our website at www.furse.com. Copies of the Total Solution Product Catalogue can also be requested from our website.

ABBREVIATIONS

- ATEX** = **A**Tmospheres **E**Xplosibles
IEC = International **E**lectrical **C**ommission
IS = Intrinsic **S**afety
SPD = **S**urge **P**rotection **D**evice

UK OFFICE

Thomas & Betts Limited
 Furse
 Wilford Road
 Nottingham
 NG2 1EB
 United Kingdom

Switchboard +44 (0)115 964 3700
 Fax +44 (0)115 986 0538
 Sales tel +44 (0)115 964 3800
 Sales fax +44 (0)115 986 0071

Email: enquiry@furse.com
www.furse.com

EUROPEAN HEADQUARTERS

Thomas & Betts
 200 Chaussée de Waterloo
 B-1640 Rhode-St-Genèse
 Belgium

Tel +32 (0)2 359 8200
 Fax +32 (0)2 359 8201

www.tnb-europe.com

MIDDLE EAST OFFICE

Thomas & Betts Ltd. Br.
 Office 107 5EA East Wing
 Dubai Airport Free Zone
 PO Box 54567
 Dubai
 United Arab Emirates

Tel +971 (0)4 609 1635
 Fax +971 (0)4 609 1636

Email: furseenquiry@tnb.com

SOUTH EAST ASIA OFFICE

Thomas & Betts
 Asia (Singapore) Pte Ltd
 10 Ang Mo Kio Street 65
 #06-07 Techpoint
 Singapore 569059

Tel +65 6720 8828
 Fax +65 6720 8780

Email: asia.inquiry@tnb.com

The content of this Thomas & Betts publication has been carefully checked for accuracy at the time of print. However, Thomas & Betts doesn't give any warranty of any kind, express or implied, in this respect and shall not be liable for any loss or damage that may result from any use or as a consequence of any inaccuracies in or any omissions from the information which it may contain. E&OE.

Copyright Thomas & Betts Corp. 2010. Copyright in these pages is owned by Thomas & Betts except where otherwise indicated. No part of this publication may be reproduced, copied or transmitted in any form or by any means, without our prior written permission. Images, trade marks, brands, designs and technology are also protected by other intellectual property rights and may not be reproduced or appropriated in any manner without written permission of their respective owners. Thomas & Betts reserves the right to change and improve any product specifications or other mentions in the publication at its own discretion and at any time. These conditions of use are governed by the laws of the Netherlands and the courts of Amsterdam shall have exclusive jurisdiction in any dispute.

Thomas & Betts