


## Standard Open Toroidal Transformers

### 1000VA Open Style, with Leads. 230V Primary, Dual Secondaries

High quality open style toroidal transformers with a single 230V/50-60Hz primary winding. Twin secondary windings may be connected in series or parallel, or used independently

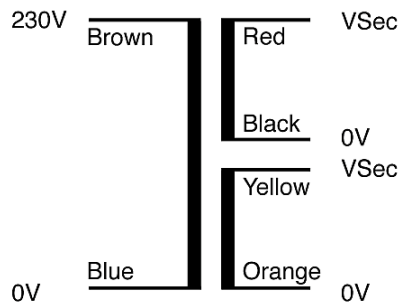

Primary 230V @ 50-60Hz

Secondary: 2 x Vsec @ 500VA Each  
Suitable for Series/Parallel connection



Nuvotem Part Number	Full Load Vsec [V]	Rated Current per Sec [A]	No Load Vsec [V]	DC Resistance [Ohms] @ 25°C	DEKRA Certificate
1000P1-2-040	2 x 40	12.500	2 x 41.76	2 x 0.0677	2161054.02
1000P1-2-045	2 x 45	11.111	2 x 47.06	2 x 0.0851	2161054.02
1000P1-2-050	2 x 50	10.000	2 x 52.35	2 x 0.1171	2161054.02
1000P1-2-055	2 x 55	9.091	2 x 57.65	2 x 0.1299	2161054.02

Primary Winding	Input Voltage Range : 207V–253V (230V +/- 10%) @ 50/60Hz DC Resistance @ 25°C = Approx. 1.1 Ohms		
Losses	Iron Losses	4.55 Watts approx.	
	Copper Losses	55.0 Watts approx.	
Temperature Class	Winding Wire (Primary & Secondary)	Class H (180°C)	
	Insulation between input and output	Class B (130°C)	
	Connection lead insulation	Class A (105°C)	
Standards	Approved to UL506 & UL5085 : File E215495 Approved to EN61558 : DEKRA Certificate 2161054.02 Conforms to EN60065, VDE0550, BS415.		
Physical Data	Approximate Dimensions	Diameter	162mm*
		Height	70mm
	Approximate Weight	* Measured away from leadout bulge; Allow extra 4mm at leads. 5.10 Kg	
Terminations	Primary	Solid copper conductors (extension of winding wire), insulated over their entire length with 105°C PVC tubing. Double-insulated over entire length with 105°C PVC tubing. 150mm Long, 10mm tinned ends.	
	Secondary	Solid copper conductors (extension of winding wire), insulated over their entire length with 105°C PVC tubing. 150mm Long, 10mm tinned ends.	
Mounting Hardware	Each transformer is supplied with a mounting kit, comprising:		
	Neoprene Insulating disc	2 pieces	
	Dished Steel Washer	1 piece	

**Regional Locations - Design, Manufacturing, Sales & Marketing**
**Talema Group Global Offices**
**North America**
**United States  
(Sales & Marketing)**

**Talema Group, LLC**  
 PO Box 935  
 900 Innovation Drive  
 Suite 120, Rolla  
 Missouri 65402  
 Tel: +1 573-303-3675  
 E-Mail:  
 sales@talema.com  
 Web: talema.com

**Asia**
**India**

**(Design, Manufacturing, Sales & Marketing)**

**Administrative Office**

**Talema Electronic India Private Limited**  
 Door No. 221, 1st and 2nd Floor  
 KJ Plaza, Opp.to Vidya Mandir School  
 Meyanur Main Road  
 Salem - 636 004 Tamil Nadu INDIA.  
 Tel: +91 427 - 243 3100  
 Fax: +91 427 - 243 3109  
 E-Mail: talema@talemaindia.net  
 Web: talema.com

**Factory Premises**

**Talema Electronic India Private Limited**  
 No. 31 & 31, Electronic Industrial Estate  
 Suramangalam Post  
 Salem - 636 005 Tamil Nadu INDIA  
 Tel: +91 427 - 243 3000  
 E-Mail: talema@talemaindia.net  
 Web: talema.com

**Europe**
**Germany  
(Design, Sales & Marketing)**

**Talema Elektronik GmbH**  
 Sembdnerstr. 5  
 82110 Germering  
 Tel: +49 89 - 841 00 - 0  
 Fax: +49 89 - 841 00 25  
 E-Mail: info@talema.de  
 Web: talema.com

**Ireland  
(Design, Sales & Marketing)**

**Nuvotem TEO**  
 Units W & X, Gweedore Business Park  
 Derrybeg, Letterkenny, Co. Donegal  
 Tel: +353 (0) 74 95 48666  
 Fax: +353 (0) 74 95 48139  
 E-Mail: info@nuvotem.com  
 Web: talema.com

**Czech Republic  
(Design, Manufacturing, Sales & Marketing)**

**NT Magnetics s.r.o.**  
 Chebská 27  
 322 00 Plzeň  
 Tel: +420 377 - 338 351  
 Fax: +420 377 - 338 350  
 E-Mail: talema@talema.cz  
 Web: talema.com

**Locations of Talema Group Global Offices**
