


**High cost-performance
DIP6-pin type, reinforced
insulation available**

PhotoMOS Relays
GU-E 1 Form A
(AQV210E, AQV210EH)

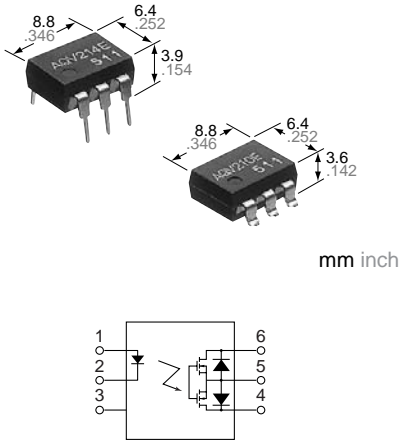

FEATURES

- 1. Reinforced insulation of I/O isolation voltage 5,000V (Reinforced insulation type)**
- 2. Controls low-level analog signals**
PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
- 3. Stable on-resistance**
- 4. Low-level off state leakage current of max. 1 μ A**

TYPICAL APPLICATIONS

- High-speed inspection machines
- Telephone equipment
- Data communication equipment
- Computers

Compliance with RoHS Directive

TYPES

	I/O isolation	Output rating*		Package	Part No.				Packing quantity	
		Load voltage	Load current		Through hole terminal	Surface-mount terminal		Tube	Tape and reel	
						Tape and reel packing style				
				Tube packing style		Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side			
AC/DC dual use	Standard 1,500 V AC	350 V	130 mA	DIP6-pin	AQV210E	AQV210EA	AQV210EAX	AQV210EAX	1 tube contains: 50 pcs.	1,000 pcs.
		400 V	120 mA		AQV214E	AQV214EA	AQV214EAX	AQV214EAX		
	Reinforced 5,000 V	350 V	130 mA		AQV210EH	AQV210EHA	AQV210EHAX	AQV210EHAX	1 batch contains: 500 pcs.	
		400 V	120 mA		AQV214EH	AQV214EHA	AQV214EHAX	AQV214EHAX		

*Indicate the peak AC and DC values.

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the relay.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Sym- bol	Type of connec- tion	AQV210E(A)	AQV214E(A)	AQV210EH(A)	AQV214EH(A)	Remarks
Input	LED forward current	I_F		50 mA				
	LED reverse voltage	V_R		5 V				
	Peak forward current	I_{FP}		1 A				$f = 100 \text{ Hz}$, Duty factor = 0.1%
	Power dissipation	P_{in}		75 mW				
Load voltage (peak AC)		V_L		350 V	400 V	350 V	400 V	
Output	Continuous load current	I_L	A	0.13 A	0.12 A	0.13 A	0.12 A	A connection: Peak AC, DC B, C connection: DC
			B	0.15 A	0.13 A	0.15 A	0.13 A	
			C	0.17 A	0.15 A	0.17 A	0.15 A	
Peak load current		I_{peak}		0.4 A	0.3 A	0.4 A	0.3 A	A connection: 100 ms (1 shot), $V_L = DC$
Power dissipation		P_{out}		500 mW				
Total power dissipation		P_T		550 mW				
I/O isolation voltage		V_{iso}		1,500 V AC		5,000 V AC		
Temperature limits	Operating	T_{opr}		-40°C to +85°C -40°F to +185°F				Non-condensing at low temp.
	Storage	T_{stg}		-40°C to +100°C -40°F to +212°F				

GU-E 1 Form A (AQV210E, AQV210EH)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	Type of connection	AQV210E(A)	AQV214E(A)	AQV210EH(A)	AQV214EH(A)	Condition	
Input	LED operate current	Typical	I _{Fon}	—	1.1 mA		1.6 mA		I _L = Max.
		Maximum			3 mA				
	LED turn off current	Minimum	I _{Foff}	—	0.3 mA		0.4 mA		I _L = Max.
		Typical			1.0 mA		1.5 mA		
LED dropout voltage	Typical	V _F	—	1.25 V (1.14 V at I _F = 5 mA)				I _F = 50 mA	
	Maximum			1.5 V					
Output	On resistance	Typical	R _{on}	A	23 Ω	30 Ω	23 Ω	30 Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum			35 Ω	50 Ω	35 Ω	50 Ω	
	On resistance	Typical	R _{on}	B	11.5 Ω	22.5 Ω	11.5 Ω	22.5 Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum			17.5 Ω	25 Ω	17.5 Ω	25 Ω	
	On resistance	Typical	R _{on}	C	6.0 Ω	11.3 Ω	6.0 Ω	11.3 Ω	I _F = 5 mA I _L = Max. Within 1 s on time
		Maximum			8.8 Ω	12.5 Ω	8.8 Ω	12.5 Ω	
Output capacitance	Typical	C _{out}	A	45 pF				I _F = 0 mA V _B = 0 V f = 1 MHz	
Off state leakage current	Maximum	I _{Leak}	—	1 μA				I _F = 0 mA V _L = Max.	
Transfer characteristics	Turn on time*	Typical	T _{on}	—	0.5 ms		0.7 ms		I _F = 0 mA → 5 mA** I _L = Max.
		Maximum			2.0 ms				
	Turn off time*	Typical	T _{off}	—	0.05 ms				I _F = 0 mA → 5 mA I _L = Max.
		Maximum			1.0 ms				
	I/O capacitance	Typical	C _{iso}	—	0.8 pF				f = 1 MHz V _B = 0 V
Maximum		1.5 pF							
Initial I/O isolation resistance	Minimum	R _{iso}	—	1,000 MΩ				500 V DC	

*Turn on/Turn off time

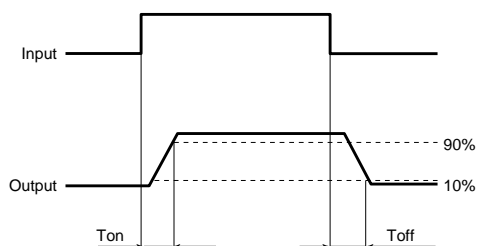

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper relay operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I _F	Standard type: 5 Reinforced type: 5 to 10	mA

■ For Dimensions

■ For Schematic and Wiring Diagrams

■ For Cautions for Use

■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Electric Works technical representative.


For more information

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40°C to $+85^{\circ}\text{C}$
 -40°F to $+185^{\circ}\text{F}$

Type of connection: A

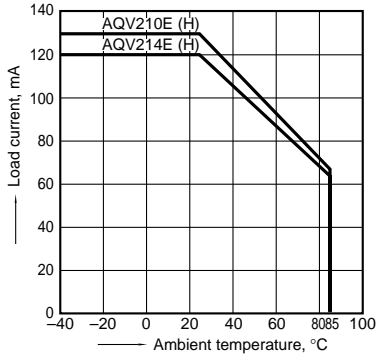


2. On-resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
 LED current: 5 mA; Load voltage: Max. (DC);
 Continuous load current: Max. (DC)

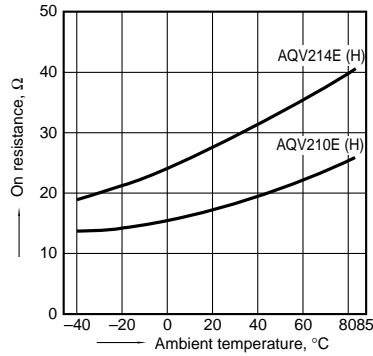


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA;
 Load voltage: Max. (DC);
 Continuous load current: Max. (DC)

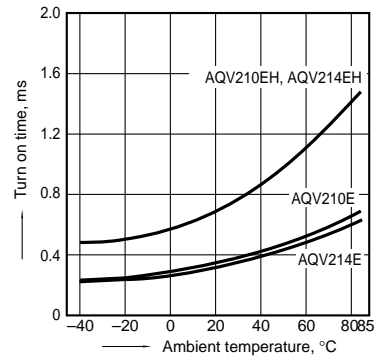


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
 Continuous load current: Max. (DC)

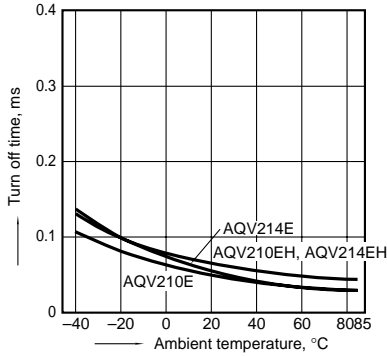


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC);
 Continuous load current: Max. (DC)

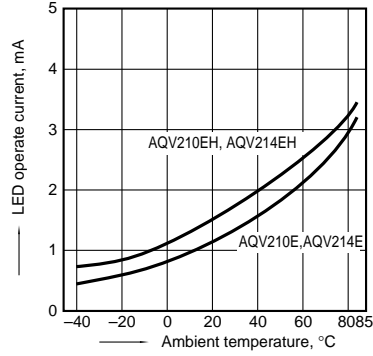


6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC);
 Continuous load current: Max. (DC)

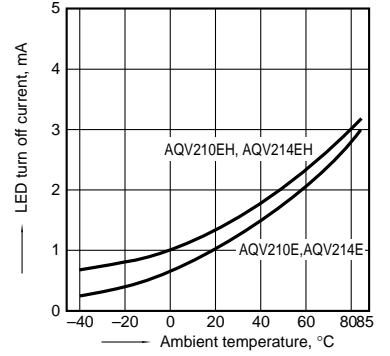


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types
 LED current: 5 to 50 mA

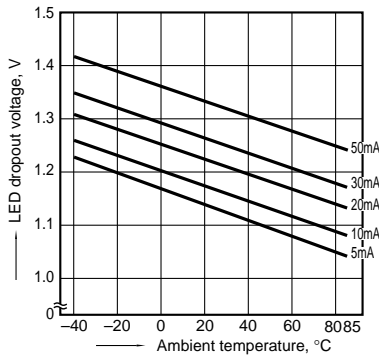


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
 Ambient temperature: 25°C 77°F



9. Off state leakage current vs. load voltage characteristics


Measured portion: between terminals 4 and 6;
 Ambient temperature: 25°C 77°F

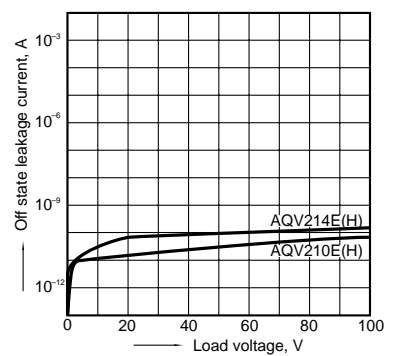

GU-E 1 Form A (AQV210E, AQV210EH)


10-(1). Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F

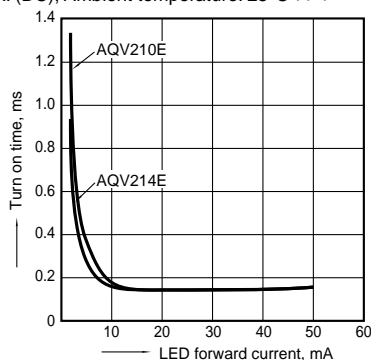


10-(2). Turn on time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F

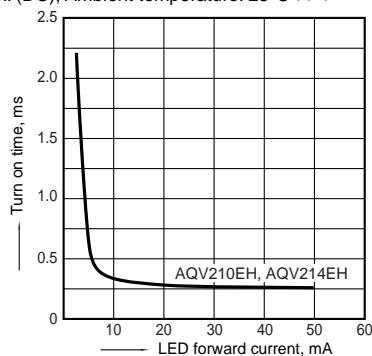


11-(1). Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F

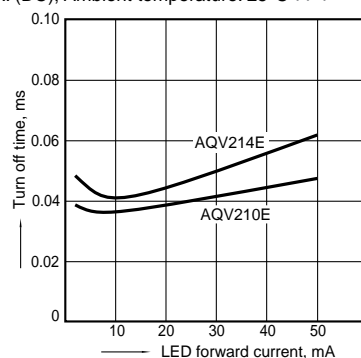

11-(2). Turn off time vs. LED forward current characteristics

Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC); Continuous load current:
Max. (DC); Ambient temperature: 25°C 77°F

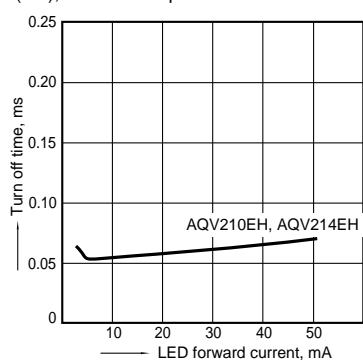

12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

