



HAHN - Elektrobau GmbH & Co. KG


Bellersheimerstraße 45
35410 Hungen
Germany

phone: +49 (0) 6402/808-0
fax: +49 (0) 6402/808-60
email: info@hahn-trafo.de




Data sheet: BV EI 304 2041

Size 4 a: height 27.0 mm	2,6 VA	ta 40/F	BV EI 304 ...
--------------------------	--------	---------	---------------

Several hundreds of typen provide high electrical safety and long service-life for printed circuit boards, household appliances, leisure electronics, heating and control technology as well as in assembly techniques. Transformers for special requirements with lower open-circuit (no-load) loss capacity are also available in the range.

<p>absolutely short-circuit-proof</p> <p>minimal size</p> <p>test certifications to ENEC 10-, VDE, UL- and CSA-regulations</p> <p>vaccum encapsulated, bobbin with dual chamber windings</p> <p>temperature class ta 40°C/F and ta 70°C/F</p> <p>high electrical safety and long service-life properties</p> <p>individually tested with certificate</p> <p>excellent temperature fluctuation resistance properties</p> <p>self-extinguishing cast housing and sealing material</p>	
---	---

Article no. BV	Output ta 40°C/F	prim.V	Connecting pins	Operating point sec. ± 5%	Connecting pins	No-load voltage V ± 5%
BV EI 304 2041	2,6	230	1-5	9 V 289 mA	7-9	15,9

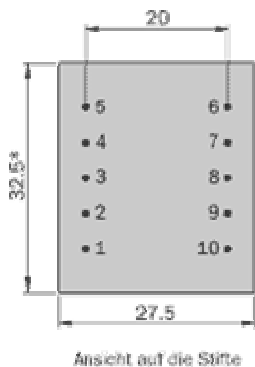

Maße ohne Toleranzangabe ± 0,3 mm,
Ausführungsänderungen vorbehalten

Dimensions with no indication of tolerances ± 0,3mm.