Multilayer Ceramic Chip Capacitors

C1005C0G2A102J050BC










TDK item description C1005C0G2A102JT*****

Applications	Commercial Grade Please refer to Part No. CGA2B1C0G2A102J050BC for Automotive use.	
Feature	Mid Mid Voltage (100 to 630V)	
Series	C1005 [EIA 0402]	
Status	Production	



	Size	
Length(L)	1.00mm ±0.05mm	
Width(W)	0.50mm ±0.05mm	
Thickness(T)	0.50mm ±0.05mm	
Terminal Width(B)	0.10mm Min.	
Terminal Spacing(G)	0.30mm Min.	
Recommended Land Pattern (PA)	0.30mm to 0.50mm	
Recommended Land Pattern (PB)	0.35mm to 0.45mm	
Recommended Land Pattern (PC)	0.40mm to 0.60mm	

Electrical Characteristics		
Capacitance	1nF ±5%	
Rated Voltage	100VDC	
Temperature Characteristic	C0G(0±30ppm/°C)	
Q (Min.)	1000	
Insulation Resistance (Min.)	10000ΜΩ	

Other	
Soldering Method	Reflow
AEC-Q200	No
Packing	Punched (Paper)Taping [180mm Reel]
Package Quantity	10000pcs

[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

C1005C0G2A102J050BC













Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

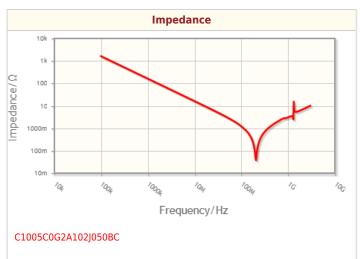




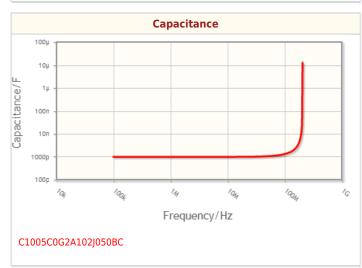

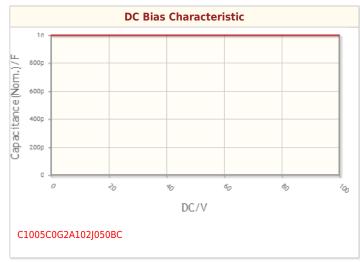

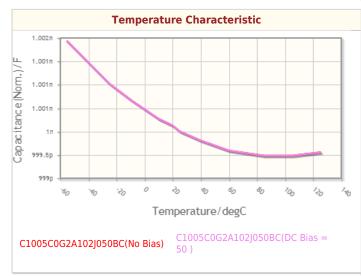

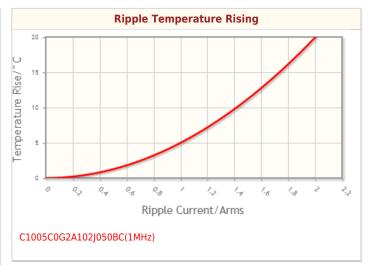

[!] Images are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

C1005C0G2A102J050BC










Associated Images



[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.