

String combiner box (SCB) - SOL-SC-1ST-0-DC-2MPPT-1000SE - 1101176

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



String combiner box for photovoltaic systems up to 1000 V DC for the connection of 2x 1 string. With surge protection and Push-in connection for the input and output side.

Product Description

The Solarline string combiner boxes (SCBs) are used in both small rooftop systems and large ground-mounted systems. Their functions include collecting and protecting strings and, if necessary, separating the panels from the rest of the system by means of a switch disconnecter or fire service switch disconnecter.

Your advantages

- ✓ Fast installation and startup
- ✓ Large portfolio of string combiner boxes in stock
- ✓ Application-oriented consultation
- ✓ Standard-compliant switchgear and controlgear assembly, thanks to use of DIN EN 61439



Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 957821
GTIN	4055626957821

Technical data

System parameter

Open-circuit voltage (U_{oc})	max. 1100 V DC
MPP voltage (U_n)	max. 1000 V DC
Number of string inputs	1 (per MPP tracker)
Current per string (max.)	40 A (I_{max})
Number of outputs	1 (per MPP tracker)
Number of supported MPP trackers	2

Safety equipment

String combiner box (SCB) - SOL-SC-1ST-0-DC-2MPPT-1000SE - 1101176

Technical data

Safety equipment

Surge protective device	T1 / T2
Protection level U_p	≤ 3.5 kV
Total discharge current I_{total} (8/20) μ s	40 kA
Total discharge current I_{total} (10/350) μ s	5 kA

Cable entry

Type of cable entry	Cable gland
Cable cross section string input	2.5 mm ² ... 6 mm ²
Sealing area string input	3 mm ... 6.5 mm
Cable cross section output	2.5 mm ² ... 6 mm ²
Sealing area output	3 mm ... 6.5 mm
Cable cross section grounding	16 mm ² (2 x)
Sealing area grounding	6 mm ... 12 mm (2 x)

General data

Material cover/door	Polycarbonate (transparent)
Housing material	Polycarbonate
Weight	2403.6 g
Degree of protection	IP65
Protection class	II

Dimensions


Outer dimensions: width, height, depth	254 mm x 180 mm x 111 mm (Housing dimensions)
--	---

Ambient conditions

Ambient temperature (operation)	-20 °C ... 55 °C
---------------------------------	------------------

Drawings

Schematic diagram



Connection of the PV strings, as well as connection to the inverter

Schematic diagram



Connection of the protective grounding conductor


String combiner box (SCB) - SOL-SC-1ST-0-DC-2MPPT-1000SE - 1101176

Schematic diagram




Connection of the protective equipotential bonding conductor

Dimensional drawing

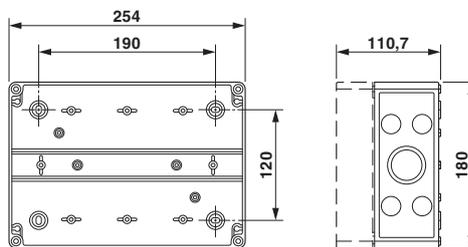


Housing dimensions

Circuit diagram



Connection of the remote indication contact on the surge protection

Connection diagram

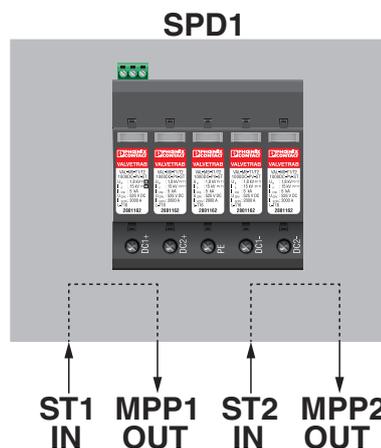

Schematic application drawing

Classifications

eCl@ss

eCl@ss 10.0.1	27142422
eCl@ss 11.0	27142422
eCl@ss 5.1	27371890
eCl@ss 7.0	27142422
eCl@ss 9.0	27142422

ETIM

ETIM 4.0	EC000816
ETIM 6.0	EC000268
ETIM 7.0	EC000268

UNSPSC

UNSPSC 18.0	39121116
-------------	----------

String combiner box (SCB) - SOL-SC-1ST-0-DC-2MPPT-1000SE - 1101176

Classifications

UNSPSC

UNSPSC 19.0	39121116
UNSPSC 20.0	39121116
UNSPSC 21.0	39121116

Accessories

Accessories

Photovoltaic connector

Protective cap - PV-C PROTECTION CAP - 1785430



Photovoltaic connector, Range of articles: Sunclix, Protective cap, color: black. self-sealing, without interlock, set consisting of: 1 protective cap for connector side and 1 protective cap for coupling side

Connector - PV-CF-S 2,5-6 (+) - 1774674



Photovoltaic connector, Range of articles: Sunclix, Connector, housing material: PPE, color: black, number of positions: 1, min. conductor cross section: 2.5 mm², max. conductor cross section: 6 mm², rated voltage: 1100 V DC, rated current: 40 A, Connection method: Spring-cage, Type of contact: Socket, min. cable diameter: 5.5 mm, max. cable diameter: 8 mm

Connector - PV-CM-S 2,5-6 (-) - 1774687



Photovoltaic connector, Range of articles: Sunclix, Connector, housing material: PPE, color: black, number of positions: 1, min. conductor cross section: 2.5 mm², max. conductor cross section: 6 mm², rated voltage: 1100 V DC, rated current: 40 A, Connection method: Spring-cage, Type of contact: Pin, min. cable diameter: 5.5 mm, max. cable diameter: 8 mm

Connector - PV-CF-S 6-16 (+) - 1790784



Photovoltaic connector, Range of articles: Sunclix, Connector, housing material: PPE, color: black, number of positions: 1, min. conductor cross section: 6 mm², max. conductor cross section: 16 mm², rated voltage: 1500 V DC, rated current: 40 A, Connection method: Spring-cage, Type of contact: Socket, min. cable diameter: 5.5 mm, max. cable diameter: 10 mm

String combiner box (SCB) - SOL-SC-1ST-0-DC-2MPPT-1000SE - 1101176

Accessories

Connector - PV-CM-S 6-16 (-) - 1790797



Photovoltaic connector, Range of articles: Sunclix, Connector, housing material: PPE, color: black, number of positions: 1, min. conductor cross section: 6 mm², max. conductor cross section: 16 mm², rated voltage: 1500 V DC, rated current: 40 A, Connection method: Spring-cage, Type of contact: Pin, min. cable diameter: 5.5 mm, max. cable diameter: 10 mm

Photovoltaic Y-distributor - PV-ED6/Y-120(2+/1-) - 1030649

Photovoltaic connector, Range of articles: Sunclix, Photovoltaic Y-distributor, housing material: PPE, color: black



Photovoltaic Y-distributor - PV-ED6/Y-120(1+/2-) - 1030650

Photovoltaic connector, Range of articles: Sunclix, Photovoltaic Y-distributor, housing material: PPE, color: black



Photovoltaic adapter set - PV-AS-MC4/6-150-MN-SET1 - 1079531



Photovoltaic connector, Range of articles: Sunclix, Photovoltaic adapter set, type: Adapter, housing material: PPE, color: black, rated current: 35 A, cable length: 150. Connect these connectors only to other connectors of the same type made by the same manufacturer. When making the connections, always observe the specifications regarding nominal voltage and nominal current. The smallest common value is permissible.

Replacement plug

Type 1/2 surge protection plug - VAL-MS-T1/T2 1000DC-PV-ST - 2801162



Replacement plug for PV arrester combinations from the VAL-MS-T1/T2 1000DC-PV-... product range

Tool set

String combiner box (SCB) - SOL-SC-1ST-0-DC-2MPPT-1000SE - 1101176

Accessories

Tool set - TOOL-KIT SOLAR - 1212071



Tool case, equipped with: crimping pliers, pressing dies for MC3, MC4 and SOLARLOK connectors, stripping tool for commercially available solar cables, stripping tool for SUNCLIX, VDE cable cutter, VDE screwdriver: PH1, PH2, 0.6x3.5 and 0.8x4.0 slots.

Phoenix Contact 2021 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>