

# LED Floodlights

V-TAC's LED Floodlights are ideal for lighting Driveways, Gardens and Buildings. These energy efficient lights emit Bright, Vibrant Light and make an eco-friendly alternative for traditional Halogen Floodlights and Metal Halide fixtures.





## Product Features

- Available in White , Warm White, Day White and RGB light output option
- Available from 10W up to 1000W
- Premium Quality Aluminium Alloy body
- Fascia glass sealed with SILICONE RUBBER ensuring superior waterproof / airtight performance
- High Power LED chip
- Built in constant current driver
- Built in Power supply, No external ballast required

## Applications

Widely used for Lighting Driveways, Gardens & Buildings, Commercial Bill Boards & Hoardings, Sports Grounds & Parking Lots

**LUMINOUS INTENSITY DISTRIBUTION DIAGRAM**



**20W VT-4922**


EAN Code

- 5789 - 3000K Warm White
- 5790 - 4000K Day White
- 5791 - 6400K White

- 3800157614634
- 3800157614641
- 3800157614658





Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:220-240V/50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>1600lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>148x181x34mm</b>



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at a different distance.

**LUMINOUS INTENSITY DISTRIBUTION DIAGRAM**

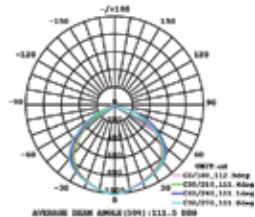

**30W VT-4933**


EAN Code

- 5808 - 4000K Day White
- 5809 - 6400K White

- 3800157614825
- 3800157614832






Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:220-240V/50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>2550lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>217 x174 x35mm</b>



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at a different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminance is at different distance.

**50W VT-4955**

EAN Code




- 5825 - 3000K Warm White
- 5826 - 4000K Day White
- 5827 - 6400K White

- 3800157614993
- 3800157615006
- 3800157615013

**BOX QTY.**  
**10**

Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:220-240V/50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>4250lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>237 x 194 x 38mm</b>

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminance is at different distance.

**100W VT-49100**

EAN Code




- 5843 - 3000K Warm White
- 5844 - 4000K Day White
- 5845 - 6400K White

- 3800157615174
- 3800157615181
- 3800157615198

**BOX QTY.**  
**04**

Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:220-240V/50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>8500lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>293 x 41 x 231mm</b>

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



**150W VT-49150**

5855 - 3000K Warm White  
5876 - 6400K White


EAN Code

3800157615297  
3800157615310


BOX QTY.  
**02**

Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC:220-240V/50Hz</b>	Color of Fixture: <b>White</b>
Luminous Flux: <b>12750lm</b>	Body Type: <b>Die casting Aluminium</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>411 x 313 x 51mm</b>

**NEW**



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



**100W VT-49101**

5970 - 3000K Warm White  
5971 - 4000K Day White  
5972 - 6400K White



EAN Code

3800157626231  
3800157626248  
3800157626255

BOX QTY.  
**04**

Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC:220-240V/50Hz</b>	Color of Fixture: <b>White</b>
Luminous Flux: <b>8500lm</b>	Body Type: <b>Aluminium Die Cast</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>291x 240 x 30mm</b>

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



200W VT-49200


EAN Code

5909 - 4000K Day White  
5910 - 6400K White


3800157619431  
3800157619448

BOX QTY.  
02


Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC:200-240V/50Hz</b>	Color of Fixture: <b>White</b>
Luminous Flux: <b>17000lm</b>	Body Type: <b>Die casting Aluminium</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>454 x 340 x 56mm</b>



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



10W VT-4911

EAN Code

5776 - 6400K White



3800157614504

BOX QTY.  
20


Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC:220-240V/50Hz</b>	Color of Fixture: <b>Grey / Black</b>
Luminous Flux: <b>800lm</b>	Body Type: <b>Die casting Aluminium</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>136 x 113 x 28mm</b>

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



30W VT-4933

5811 - 4000K Day White

EAN Code



3800157614856

BOX QTY.


20

Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC:220-240V/50Hz</b>	Color of Fixture: <b>Grey / Black</b>
Luminous Flux: <b>2550lm</b>	Body Type: <b>Die casting Aluminium</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>217 x 174 x 35mm</b>

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



50W VT-4955

5830 - 6400K White

EAN Code



3800157615044

BOX QTY.


10

Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC:220-240V/50Hz</b>	Color of Fixture: <b>Grey / Black</b>
Luminous Flux: <b>4250lm</b>	Body Type: <b>Die casting Aluminium</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>237 x 194 x 38mm</b>

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distances.



100W VT-49100

EAN Code



- 5846 - 3000K Warm White
- 5847 - 4000K Day White
- 5848 - 6400K White

- 3800157615204
- 3800157615211
- 3800157615228


BOX QTY.  
04

Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC:220-240V/50Hz</b>	Color of Fixture: <b>Grey / Black</b>
Luminous Flux: <b>8500lm</b>	Body Type: <b>Die casting Aluminium</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>293 x231x 41mm</b>

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distances.



150W VT-49150

EAN Code



- 5858 - 3000K Warm White
- 5859 - 4000K Day White
- 5860 - 6400K White

- 3800157615327
- 3800157615334
- 3800157615341


BOX QTY.  
02

Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC:220-240V/50Hz</b>	Color of Fixture: <b>Grey / Black</b>
Luminous Flux: <b>12750lm</b>	Body Type: <b>Die casting Aluminium</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>411x313 x 51mm</b>

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves Indicate the illuminated area and the average illumination when the luminaire is at different distance.





10W VT-4911  
 5779 - 6400K White

EAN Code  
 3800157614535


BOX QTY.  
 20

Sensor Compatible:	Yes	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Black
Luminous Flux:	800lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	136x211x8mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves Indicate the illuminated area and the average illumination when the luminaire is at different distance.



20W VT-4922  
 5796 - 4000K Day White  
 5797 - 6400K White




EAN Code  
 3800157614702  
 3800157614719

BOX QTY.  
 20

Sensor Compatible:	Yes	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Black
Luminous Flux:	1600lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	181x148x34mm



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminance is at different distance.

30W VT-4933

EAN Code




- 5813 - 3000K Warm White
- 5814 - 4000K Day White
- 5815 - 6400K White

- 3800157614870
- 3800157614887
- 3800157614894

BOX QTY. **20**

Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:220-240V/50Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>2550lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>217 x 174 x 35mm</b>

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminance is at different distance.

50W VT-4955

EAN Code



- 5832 - 4000K Day White
- 5833 - 6400K White

- 3800157615068
- 3800157615075

BOX QTY. **10**

Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:220-240V/50Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>4250lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>237 x 194 x 38mm</b>

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



100W VT-49100


EAN Code

- 5849 - 3000K Warm White
- 5850 - 4000K Day White
- 5851 - 6400K White

- 3800157615235
- 3800157615242
- 3800157615259





Sensor Compatible:	Yes	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Black
Luminous Flux:	8500lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	293 x 231 x 41mm



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



150W VT-49150


EAN Code

- 5861 - 3000K Warm White
- 5862 - 4000K Day White
- 5863 - 6400K White

- 3800157615358
- 3800157615365
- 3800157615372



Sensor Compatible:	Yes	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Black
Luminous Flux:	12750lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	411x 313 x 51mm



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



200W VT-49200

EAN Code



5911 - 4000K Day White  
5912 - 6400K White

3800157619455  
3800157619462


BOX QTY.  
02

Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:200-240V/50Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>17000lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>454 x340 x 56mm</b>



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distances.



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves Indicate the illuminated area and the average illumination when the luminaire is at different distance.





10W VT-4911  
5782 - 6400K White

EAN Code  
3800157614566


BOX QTY.  
20

Sensor Compatible:	Yes	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Grey
Luminous Flux:	800lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	136 x113 x28mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves Indicate the illuminated area and the average illumination when the luminaire is at different distance.





20W VT-4922  
5799 - 4000K Day White  
5800 - 6400K White

EAN Code  
3800157614733  
3800157614740

BOX QTY.  
20

Sensor Compatible:	Yes	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V/50Hz	Color of Fixture:	Grey
Luminous Flux:	1600lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	181x148x34mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



30W VT-4933


EAN Code

- 5816 - 3000K Warm White
- 5817 - 4000K Day White
- 5818 - 6400K White

- 3800157614900
- 3800157614917
- 3800157614924



BOX QTY. **20**

Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC:220-240V/50Hz</b>	Color of Fixture: <b>Grey</b>
Luminous Flux: <b>2550lm</b>	Body Type: <b>Die casting Aluminium</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>217 x 174 x 35mm</b>



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



50W VT-4955


EAN Code

- 5834 - 3000K Warm White
- 5835 - 4000K Day White
- 5836 - 6400K White

- 3800157615082
- 3800157615099
- 3800157615105



BOX QTY. **20**

Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC:220-240V/50Hz</b>	Color of Fixture: <b>Grey</b>
Luminous Flux: <b>4250lm</b>	Body Type: <b>Die casting Aluminium</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>237 x 194 x 38mm</b>



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



100W VT-49100


EAN Code

- 5852 - 3000K Warm White
- 5853 - 4000K Day White
- 5854 - 6400K White

- 3800157615266
- 3800157615273
- 3800157615280





Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC:220-240V/50Hz</b>	Color of Fixture: <b>Grey</b>
Luminous Flux: <b>8500lm</b>	Body Type: <b>Die casting Aluminium</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>293 x 231x 41mm</b>



Note: The Curves indicate the illuminated area and the average illumination when the luminaires is at different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



150W VT-49150


EAN Code

- 5864 - 3000K Warm White
- 5866 - 6400K White

- 3800157615389
- 3800157615402



Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC:220-240V/50Hz</b>	Color of Fixture: <b>Grey</b>
Luminous Flux: <b>12750lm</b>	Body Type: <b>Die casting Aluminium</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>411x 313 x 51mm</b>



Note: The Curves indicate the illuminated area and the average illumination when the luminaires is at different distance.



**200W** VT-49200

5913 - 4000K Day White  
5914 - 6400K White



EAN Code

3800157619479  
3800157619486


**BOX QTY**  
**02**

Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:200-240V/50Hz</b>	Color of Fixture:	<b>Grey</b>
Luminous Flux:	<b>17000lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>340 x 454x 56mm</b>



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the beamsize is at different distance.



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



20W VT-4820

EAN Code

Green LED



5760 / 5718 - Green

3800157611725 / 3800157604970

Sensor Compatible:	Yes	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Grey & Black
Luminous Flux:	1600lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.95	Dimension:	182 x 142 x 36mm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM  
Luminous Intensity Distribution Curve



100W VT-48100-1

EAN Code

5766 / 5713 - 4500K Day White

3800157611787 / 3800157604543

BOX QTY. 04

Sensor Compatible:	Yes	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Grey & Black
Luminous Flux:	8000lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	353 x 268 x 46mm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.





300W VT-48302

5731 - 4500K Day White  
5732 - 6000K White


EAN Code

3800157606141  
3800157606158


BOX QTY.  
02

Sensor Compatible:	Yes	Beam Angle:	100°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Grey & Black
Luminous Flux:	24000lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	532 x 443 x 70 mm


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




The Average Illuminance Effective Figure



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.






**BOX QTY.**  
50

**10W VT-4611**


5898 - 3000K Warm White  
5899 - 4500K Day White  
5900 - 6000K White

**EAN Code**

3800157619219  
3800157619226  
3800157619233



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>110°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>850lm</b>	Body Type:	<b>Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>122 x 105 x 30mm</b>




**BOX QTY.**  
20

**10W VT-4611**


5875 - 3000K Warm White  
5876 - 4500K Day White  
5877 - 6000K White

**EAN Code**

3800157615976  
3800157615983  
3800157615990



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>110°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>850lm</b>	Body Type:	<b>Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>122 x 105 x 30mm</b>




**BOX QTY.**  
20

**20W VT-4621**


5878 - 3000K Warm White  
5879 - 4500K Day White  
5880 - 6000K White

**EAN Code**

3800157616003  
3800157616010  
3800157616027



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>110°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>1700lm</b>	Body Type:	<b>Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>168 x 135 x 30 mm</b>



BOX QTY.


20

### 30W VT-4631


5881 - 3000K Warm White  
5882 - 4500K Day White  
5883 - 6000K White

EAN Code

3800157616034  
3800157616041  
3800157616058



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>110°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>2550lm</b>	Body Type:	<b>Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>213 x 168 x 32</b>



BOX QTY.


10

### 50W VT-4651


5884 - 3000K Warm White  
5885 - 4500K Day White  
5886 - 6000K White

EAN Code

3800157616065  
3800157616072  
3800157616089



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>110°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>4250lm</b>	Body Type:	<b>Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>255 x 196 x 36mm</b>



BOX QTY.


10

### 50W VT-4651

5904 - 3000K Warm White  
5905 - 4500K Day White  
5906 - 6000K White



EAN Code

3800157619370  
3800157619387  
3800157619394



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>110°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>4250</b>	Body Type:	<b>Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>255 x 196 x 36</b>

NEW



100W VT-46100

EAN Code


- 5887 - 3000K Warm White
- 5888 - 4500K Day White
- 5889 - 6000K White

- 3800157616096
- 3800157616102
- 3800157616119

BOX QTY. **10**

Sensor Compatible:	Yes	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Black
Luminous Flux:	8500lm	Body Type:	Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	345 x 265 x 45mm

NEW



150W VT-46150

EAN Code



- 5890 - 4500K Day White
- 5891 - 6000K White

- 3800157616126
- 3800157616133

BOX QTY. **05**

Sensor Compatible:	Yes	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Black
Luminous Flux:	12750lm	Body Type:	Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	375 x 292 x 45mm

NEW



200W VT-46200

EAN Code



5892 - 4500K Day White  
5893 - 6000K White

3800157616140  
3800157616157

BOX QTY.  
05

Sensor Compatible:	Yes	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	Black
Luminous Flux:	17000lm	Body Type:	Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	415 x 332 x 45mm

NEW



200W VT-46200

EAN Code


5907 - 4500K Day White  
5908 - 6000K White

3800157619400  
3800157619417

BOX QTY.  
05

Sensor Compatible:	Yes	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50/60Hz	Color of Fixture:	White
Luminous Flux:	17000lm	Body Type:	Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	415 x 332 x 45mm

**NEW**



**BOX QTY.**

**40**

**EAN Code**

**10W VT-4011**

**5943 - 3000K Warm White**


**5944 - 4000K Day White**

**5945 - 6500K White**

3800157625364


3800157625371

3800157625388



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>110°</b>
Voltage/Frequency:	<b>AC:220-240V,50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>850lm</b>	Body Type:	<b>Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>110 x 112 x 22mm</b>

**NEW**



**BOX QTY.**

**20**

**EAN Code**

**20W VT-4021**

**5949 - 3000K Warm White**


**5950 - 4000K Day White**

**5951 - 6500K White**

3800157625425


3800157625432

3800157625449



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>110°</b>
Voltage/Frequency:	<b>AC:220-240V,50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>1700lm</b>	Body Type:	<b>Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>150 x 143 x 26mm</b>

**NEW**



**BOX QTY.**

**20**

**EAN Code**

**30W VT-4031**

**5955 - 3000K Warm White**


**5956 - 4000K Day White**

**5957 - 6500K White**

3800157625487


3800157625494

3800157625500



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>110°</b>
Voltage/Frequency:	<b>AC:220-240V,50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>2550lm</b>	Body Type:	<b>Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>185 x 163 x 26mm</b>

NEW




50W VT-4051

EAN Code

- 5961 - 3000K Warm White
- 5962 - 4000K Day White
- 5963 - 6500K White


- 3800157625548
- 3800157625555
- 3800157625562

BOX QTY. **10**



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>110°</b>
Voltage/Frequency:	<b>AC:220-240V,50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>4250lm</b>	Body Type:	<b>Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>245 x 192 x 28mm</b>

NEW




100W VT-40101

EAN Code

- 5967 - 3000K Warm White
- 5968 - 4000K Day White
- 5969 - 6500K White


- 3800157625609
- 3800157625616
- 3800157625623

BOX QTY. **05**



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>110°</b>
Voltage/Frequency:	<b>AC:220-240V,50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>8500lm</b>	Body Type:	<b>Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>330 x 271 x 33mm</b>

NEW



BOX QTY.

40

10W VT-4011

5940 - 3000K Warm White

5941 - 4000K Day White


5942 - 6500K White

EAN Code

3800157625333


3800157625340

3800157625357



Sensor Compatible:	Yes	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50Hz	Color of Fixture:	Black
Luminous Flux:	850lm	Body Type:	Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	110 x 112 x 22mm

NEW



BOX QTY.

20

20W VT-4021

5946 - 3000K Warm White

5947 - 4000K Day White


5948 - 6500K White

EAN Code

3800157625395


3800157625401

3800157625418



Sensor Compatible:	Yes	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50Hz	Color of Fixture:	Black
Luminous Flux:	1700lm	Body Type:	Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	150 x 143 x 26mm

NEW



BOX QTY.

20

30W VT-4031

5952 - 3000K Warm White

5953 - 4000K Day White


5954 - 6500K White

EAN Code

3800157625466

3800157625463


3800157625470



Sensor Compatible:	Yes	Beam Angle:	110°
Voltage/Frequency:	AC:220-240V,50Hz	Color of Fixture:	Black
Luminous Flux:	2550lm	Body Type:	Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	185 x 163 x 26mm



NEW




50W VT-4051

EAN Code

- 5958 - 3000K Warm White
- 5959 - 4000K Day White
- 5960 - 6500K White


- 3800157625517
- 3800157625524
- 3800157625531

BOX QTY. **10**



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>110°</b>
Voltage/Frequency:	<b>AC:220-240V,50Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>4250lm</b>	Body Type:	<b>Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>245 x 192 x 28mm</b>

NEW




100W VT-40101

EAN Code

- 5964 - 3000K Warm White
- 5965 - 4000K Day White
- 5966 - 6500K White

- 3800157625579
- 3800157625586
- 3800157625593

BOX QTY. **05**





Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>110°</b>
Voltage/Frequency:	<b>AC:220-240V,50Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>8500lm</b>	Body Type:	<b>Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>330 x 271 x 33mm</b>

NEW



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

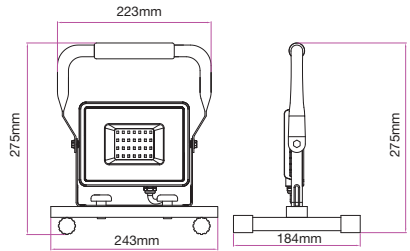

3 METER WIRE  
WITH EU PLUG

30W VT-4230

EAN Code

5927 - 4000K Day White  
5928 - 6400K White

3800157622837  
3800157622844



BOX QTY.  
10

Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC: 220-240V, 50Hz</b>	Color of Fixture: <b>Black</b>
Luminous Flux: <b>2550lm</b>	Body Type: <b>Aluminium Die Cast</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>243x 275x 184mm</b>

NEW



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

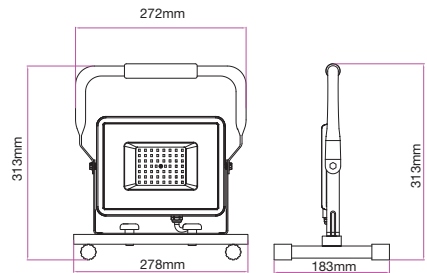

3 METER WIRE  
WITH EU PLUG

50W VT-4250

EAN Code


5929 - 4000K Day White  
5930 - 6400K White

3800157622851  
3800157622868

BOX QTY.  
10

Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC: 220-240V, 50Hz</b>	Color of Fixture: <b>Black</b>
Luminous Flux: <b>4250lm</b>	Body Type: <b>Aluminium Die Cast</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>278 x 313 x 183mm</b>

NEW

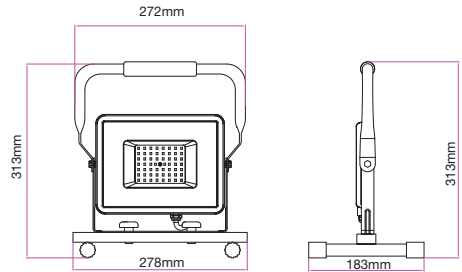

**3 METER WIRE WITH BS PLUG**

**50W** VT-4251

EAN Code


5933 - 6400K White

3800157622899

BOX QTY.


**10**

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:220-240V,50/60Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>4250lm</b>	Body Type:	<b>Aluminium Die Cast</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>278x 313x 183mm</b>

NEW

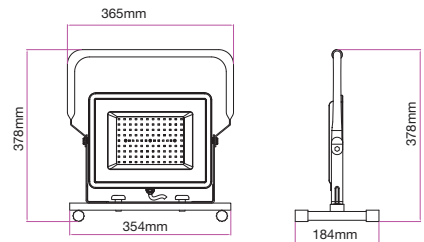

**3 METER WIRE WITH EU PLUG**

**100W** VT-42100

EAN Code


5931 - 4000K Day White  
5932 - 6400K White

3800157622875  
3800157622882

BOX QTY.

**04**

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC: 220-240V, 50Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>8500lm</b>	Body Type:	<b>Aluminium Die Cast</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>354 x 378 x 184mm</b>




**BOX QTY.**  
12

**30W** VT-4734

5661 - 3000K Warm White  
5662 - 4500K Day White  
5663 - 6000K White

EAN Code

3800157603089  
3800157603096  
3800157603102



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>90°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>Grey</b>
Luminous Flux:	<b>2400lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>274 x 188 x 73mm</b>




**BOX QTY.**  
05

**50W** VT-4754

5664 - 3000K Warm White  
5665 - 4500K Day White  
5666 - 6000K White

EAN Code

3800157603119  
3800157603126  
3800157603133



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>Grey</b>
Luminous Flux:	<b>4000lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>335 x 239 x 120mm</b>




**BOX QTY.**  
05

**100W** VT-47104

5667 - 3000K Warm White  
5668 - 4500K Day White  
5669 - 6000K White

EAN Code

3800157603140  
3800157603157  
3800157603164



Sensor Compatible:	<b>Yes</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>Grey</b>
Luminous Flux:	<b>8000lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>405 x 288 x 130mm</b>


# LED PIR Floodlights

V-TAC's LED Floodlights with PIR are sleek and durable, ideal for lighting Driveways, Gardens and Buildings. These high-performance lights emit a Bright and Vibrant Light making it a sustainable replacement for traditional Halogen Floodlights and Metal Halide fixtures.



The advanced motion sensor PIR detects movement within a range of 2 - 8 meter and can also be adjusted to 3 different functions.



## Colour Temperatures




## Salient Features

- Available in two refined body colour options (black and white)
- ⚡ Available from 10W up to 50W
- 📦 Premium Quality Aluminium Alloy body
- 🛡️ Corrosion Resistant
- ⚙️ High Power LED chip
- 🔋 Built in driver - no external power supply required
- 👤 High quality Fresnel lens for excellent coverage area
- 🔌 Integrated circuit designed for instant start-up on Detection


Elevated level of Energy saving with LED + PIR



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



MOTION  
SENSOR  
**(PIR)**



10W VT-4911


EAN Code

- 5786 - 3000K Warm White
- 5787 - 4000K Day White
- 5788 - 6400K White

- 3800157614603
- 3800157614610
- 3800157614627

Detection Angle: **120°**  
 Detection Distance: **2-8 Meters**


BOX QTY. **20**




Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Watts:	10W	Beam Angle:	100°
Voltage/Frequency:	AC:200-240,50Hz	Color of Fixture:	White
Luminous Flux:	800lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	113 x 178 x 47mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



MOTION  
SENSOR  
**(PIR)**



20W VT-4922


EAN Code

- 5804 - 3000K Warm White
- 5805 - 4000K Day White
- 5806 - 6400K White

- 3800157614788
- 3800157614795
- 3800157614801

Detection Angle: **120°**  
 Detection Distance: **2-8 Meters**



BOX QTY. **20**



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Watts:	20W	Beam Angle:	100°
Voltage/Frequency:	AC:200-240,50Hz	Color of Fixture:	White
Luminous Flux:	1600lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	181 x 205 x 57mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




30W VT-4933

EAN Code

- 5822 - 3000K Warm White
- 5823 - 4000K Day White
- 5824 - 6400K White

- 3800157614962
- 3800157614979
- 3800157614986



Detection Angle: **120°**  
 Detection Distance: **2-8 Meters**



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Watts:	30W	Beam Angle:	100°
Voltage/Frequency:	AC:200-240,50Hz	Color of Fixture:	White
Luminous Flux:	2550lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	217 x 231 x 59mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




50W VT-4955

EAN Code

- 5840 - 3000K Warm White
- 5841 - 4000K Day White
- 5842 - 6400K White

- 3800157615143
- 3800157615150
- 3800157615167




Detection Angle: **120°**  
 Detection Distance: **2-8 Meters**



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Watts:	50W	Beam Angle:	100°
Voltage/Frequency:	AC:200-240,50Hz	Color of Fixture:	White
Luminous Flux:	4250lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	237 x 251 x 62mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



10W VT-4911

- 5783 - 3000K Warm White
- 5784 - 4000K Day White
- 5785 - 6400K White

EAN Code




- 3800157614573
- 3800157614580
- 3800157614597

Detection Angle: **120°**  
 Detection Distance: **2-8 Meters**

BOX QTY. **20**

Watts:	10W	Beam Angle:	100°
Voltage/Frequency:	AC:200-240,50Hz	Color of Fixture:	Black
Luminous Flux:	800lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	113 x 178 x 47mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



20W VT-4922

- 5801 - 3000K Warm White
- 5802 - 4000K Day White
- 5803 - 6400K White

EAN Code

- 3800157614757
- 3800157614764
- 3800157614771



Detection Angle: **120°**  
 Detection Distance: **2-8 Meters**

BOX QTY. **20**

Watts:	20W	Beam Angle:	100°
Voltage/Frequency:	AC:200-240,50Hz	Color of Fixture:	Black
Luminous Flux:	1600lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	181 x 205 x 57mm



LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




30W VT-4933

EAN Code

- 5819 - 3000K Warm White
- 5820 - 4000K Day White
- 5821 - 6400K White

- 3800157614931
- 3800157614948
- 3800157614955



Detection Angle: **120°**  
 Detection Distance: **2-8 Meters**



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Watts:	30W	Beam Angle:	100°
Voltage/Frequency:	AC:200-240,50Hz	Color of Fixture:	Black
Luminous Flux:	2550lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	217 x 231 x 59mm

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




50W VT-4955

EAN Code

- 5837 - 3000K Warm White
- 5838 - 4000K Day White
- 5839 - 6400K White

- 3800157615112
- 3800157615129
- 3800157615136


Detection Angle: **120°**  
 Detection Distance: **2-8 Meters**



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Watts:	50W	Beam Angle:	100°
Voltage/Frequency:	AC:200-240,50Hz	Color of Fixture:	Black
Luminous Flux:	4250lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP44
PF:	>0.9	Dimension:	237 x 251 x 62mm


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



The average illuminance effective figure

Distance	Average Illuminance	Beam Area
1.5m	445.9lm	0.44m² / 4.74sqm-ft
2.0m	334.425lm	0.81m² / 8.77sqm-ft
3.0m	222.95lm	1.52m² / 16.45sqm-ft
4.0m	167.2125lm	2.26m² / 24.39sqm-ft
5.0m	133.7625lm	3.12m² / 33.62sqm-ft
6.0m	111.4875lm	4.09m² / 43.92sqm-ft
7.0m	94.57142857lm	5.18m² / 55.79sqm-ft
8.0m	81.96428571lm	6.39m² / 68.91sqm-ft
9.0m	72.22222222lm	7.72m² / 83.59sqm-ft
10.0m	64.59lm	9.18m² / 98.94sqm-ft

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



Detection Angle: **120°**  
Detection Distance: **2-8 Meters**

**10W** VT-4810-1 PIR

EAN Code


5746 - 3000K Warm White  
5747 - 4500K Day White

3800157608206  
3800157608213

**BOX QTY.**  
**20**

Watts:	<b>10W</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>800lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP44</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>133x178x47mm</b>


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



The average illuminance effective figure

Distance	Average Illuminance	Beam Area
1.5m	1015.5lm	0.44m² / 4.74sqm-ft
2.0m	761.625lm	0.81m² / 8.77sqm-ft
3.0m	507.75lm	1.52m² / 16.45sqm-ft
4.0m	380.8125lm	2.26m² / 24.39sqm-ft
5.0m	304.65lm	3.12m² / 33.62sqm-ft
6.0m	253.875lm	4.09m² / 43.92sqm-ft
7.0m	217.14285714lm	5.18m² / 55.79sqm-ft
8.0m	187.9375lm	6.39m² / 68.91sqm-ft
9.0m	164.69444444lm	7.72m² / 83.59sqm-ft
10.0m	145.18lm	9.18m² / 98.94sqm-ft

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



Detection Angle: **120°**  
Detection Distance: **2-8 Meters**

**20W** VT-4820-1 PIR

EAN Code



5756 - 3000K Warm White  
5749 - 4500K Day White  
5750 - 6000K White

3800157611688  
3800157608862  
3800157608879

**BOX QTY.**  
**15**

Watts:	<b>20W</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>1600lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP44</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>185x211x50mm</b>

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



The average illuminance effective figure

Flux (lm)	Beam Diameter (mm)	Average Illuminance (lx)
3000	1000	300
6000	700	1224
9000	500	3600
12000	400	7500
15000	350	12240
18000	300	20000
21000	280	27000
24000	260	36000
27000	250	47500
30000	240	63000
33000	230	81000
36000	220	102000
39000	210	126000
42000	200	153000
45000	190	183000
48000	180	216000
51000	170	252000
54000	160	291000
57000	150	333000
60000	140	378000

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Detection Angle: **120°**  
Detection Distance: **2-8 Meters**



**30W** VT-4830-1 PIR  
**5752 - 6000K White**

EAN Code  
3800157608893

**BOX QTY.**  
**10**

Watts:	<b>30W</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>2400lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP44</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>237x255x51mm</b>

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



The average illuminance effective figure

Flux (lm)	Beam Diameter (mm)	Average Illuminance (lx)
4000	1000	400
8000	700	1633
12000	500	4800
16000	400	10000
20000	350	15300
24000	300	24000
28000	280	32000
32000	260	42000
36000	250	54000
40000	240	67000
44000	230	81000
48000	220	96000
52000	210	113000
56000	200	131000
60000	190	150000
64000	180	171000
68000	170	193000
72000	160	216000
76000	150	240000
80000	140	264000
84000	130	289000
88000	120	315000
92000	110	342000
96000	100	370000

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Detection Angle: **120°**  
Detection Distance: **2-8 Meters**


**50W** VT-4850-1 PIR  
**5758 - 3000K Warm White**  
**5753 - 4500K Day White**  
**5754 - 6000K White**

EAN Code  
3800157611701  
3800157608909  
3800157608916

**BOX QTY.**  
**10**

Watts:	<b>50W</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>White</b>
Luminous Flux:	<b>4000lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP44</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>237x255x51mm</b>


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



The average illuminance effective figure

Max Lux: 737.000lx	Beam Angle: 100°	Beam Angle: 180°
1.0m - 18.20 / 45.50lx	0.46m / 8.00lx	0.46m / 8.00lx
2.0m - 4.55 / 11.38lx	0.92m / 16.00lx	0.92m / 16.00lx
3.0m - 3.03 / 7.59lx	1.38m / 24.00lx	1.38m / 24.00lx
4.0m - 2.27 / 5.69lx	1.84m / 32.00lx	1.84m / 32.00lx
5.0m - 1.82 / 4.55lx	2.30m / 40.00lx	2.30m / 40.00lx
6.0m - 1.51 / 3.79lx	2.76m / 48.00lx	2.76m / 48.00lx
7.0m - 1.36 / 3.40lx	3.22m / 56.00lx	3.22m / 56.00lx
8.0m - 1.22 / 3.05lx	3.68m / 64.00lx	3.68m / 64.00lx
9.0m - 1.13 / 2.81lx	4.14m / 72.00lx	4.14m / 72.00lx
10.0m - 1.07 / 2.67lx	4.60m / 80.00lx	4.60m / 80.00lx

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.




Detection Angle: **120°**  
 Detection Distance: **2-8 Meters**

**10W** VT-4810 PIR EAN Code  
**5723 - 3000K Warm White** 3800157605724

BOX QTY.  
**15**

Watts:	<b>10W</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>800lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP44</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>133x178x47mm</b>


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



The average illuminance effective figure

Max Lux: 1676.070lx	Beam Angle: 100°	Beam Angle: 180°
1.0m - 41.91 / 104.80lx	0.46m / 8.00lx	0.46m / 8.00lx
2.0m - 10.48 / 26.20lx	0.92m / 16.00lx	0.92m / 16.00lx
3.0m - 6.98 / 17.47lx	1.38m / 24.00lx	1.38m / 24.00lx
4.0m - 5.24 / 13.10lx	1.84m / 32.00lx	1.84m / 32.00lx
5.0m - 4.19 / 10.48lx	2.30m / 40.00lx	2.30m / 40.00lx
6.0m - 3.49 / 8.74lx	2.76m / 48.00lx	2.76m / 48.00lx
7.0m - 3.03 / 7.59lx	3.22m / 56.00lx	3.22m / 56.00lx
8.0m - 2.72 / 6.80lx	3.68m / 64.00lx	3.68m / 64.00lx
9.0m - 2.50 / 6.26lx	4.14m / 72.00lx	4.14m / 72.00lx
10.0m - 2.34 / 5.85lx	4.60m / 80.00lx	4.60m / 80.00lx

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.




Detection Angle: **120°**  
 Detection Distance: **2-8 Meters**

**20W** VT-4820 PIR EAN Code  
**5697 - 3000K Warm White** 3800157604338  
**5698 - 4500K Day White** 3800157604345  
**5715 - 6000K White** 3800157604949


BOX QTY.  
**15**

Watts:	<b>20W</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>1600lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP44</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>185x211x50mm</b>

### LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



MOTION  
PIR  
SENSOR



#### The average illuminance effective figure

Flux: 2400lm

1.0m (32.81 245.75m)	0.48m (1.64 3.62m)
2.0m (65.62 245.75m)	0.30m (1.01 7.66m)
3.0m (98.43 245.75m)	0.20m (0.68 10.49m)
4.0m (131.24 245.75m)	0.15m (0.51 13.72m)
5.0m (164.05 245.75m)	0.12m (0.39 17.45m)
6.0m (196.86 245.75m)	0.10m (0.33 21.18m)
7.0m (229.67 245.75m)	0.09m (0.29 24.91m)
8.0m (262.48 245.75m)	0.08m (0.26 28.64m)
9.0m (295.29 245.75m)	0.07m (0.23 32.37m)
10.0m (328.10 245.75m)	0.06m (0.20 36.10m)

Beam Angle: 100°

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

**30W** VT-4830 PIR

EAN Code

- 5699 - 3000K Warm White
- 5700 - 4500K Day White
- 5716 - 6000K White


- 3800157604352
- 3800157604369
- 3800157604956

Detection Angle: **120°**  
Detection Distance: **2-8 Meters**


BOX QTY. **10**

Watts:	<b>30W</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>2400lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP44</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>237x255x51mm</b>

### LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



MOTION  
PIR  
SENSOR



#### The average illuminance effective figure

Flux: 4000lm

1.0m (32.81 245.75m)	0.48m (1.64 3.62m)
2.0m (65.62 245.75m)	0.30m (1.01 7.66m)
3.0m (98.43 245.75m)	0.20m (0.68 10.49m)
4.0m (131.24 245.75m)	0.15m (0.51 13.72m)
5.0m (164.05 245.75m)	0.12m (0.39 17.45m)
6.0m (196.86 245.75m)	0.10m (0.33 21.18m)
7.0m (229.67 245.75m)	0.09m (0.29 24.91m)
8.0m (262.48 245.75m)	0.08m (0.26 28.64m)
9.0m (295.29 245.75m)	0.07m (0.23 32.37m)
10.0m (328.10 245.75m)	0.06m (0.20 36.10m)

Beam Angle: 100°

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

**50W** VT-4850 PIR

EAN Code


- 5701 - 3000K Warm White
- 5702 - 4500K Day White
- 5717 - 6000K White

- 3800157604376
- 3800157604383
- 3800157604963

Detection Angle: **120°**  
Detection Distance: **2-8 Meters**

BOX QTY. **10**

Watts:	<b>50W</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:200-240,50Hz</b>	Color of Fixture:	<b>Black</b>
Luminous Flux:	<b>4000lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt;70</b>	IP Rating:	<b>IP44</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>237x255x51mm</b>



**RF**

Remote Control

**10W** VT-4711

**RGB 5894**


EAN Code

3800157617512

BOX QTY.

**20**

Watts:	<b>10W</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:200-240,50/60Hz</b>	Color of Fixture:	<b>Grey</b>
Luminous Flux:	<b>800lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt; 80</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.9</b>	Dimension:	<b>115x87x85mm</b>



**Infrared**

Remote Control

**10W** VT-4711

**RGB 5895**

EAN Code

3800157617529

BOX QTY.

**20**

Watts:	<b>10W</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:200-240,50/60Hz</b>	Color of Fixture:	<b>Grey</b>
Luminous Flux:	<b>800lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt; 80</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.95</b>	Dimension:	<b>115x87x85mm</b>



**RF**  
Remote Control

**30W** VT-4732


**RGB 5755**

**BOX QTY.**

**06**

EAN Code

3800157609517



Watts:	<b>30W</b>	Beam Angle:	<b>120°</b>
Voltage/Frequency:	<b>AC: 90-240V, 50/60Hz</b>	Color of Fixture:	<b>Grey</b>
Luminous Flux:	<b>2400lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt; 80</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.95</b>	Dimension:	<b>230x136x206mm</b>



**RF**  
Remote Control

**50W** VT-4752


**RGB 5691**

**BOX QTY.**

**06**

EAN Code

3800157603508



Watts:	<b>50W</b>	Beam Angle:	<b>120°</b>
Voltage/Frequency:	<b>AC:100-240V,50/60Hz</b>	Color of Fixture:	<b>Grey</b>
Luminous Flux:	<b>4000lm</b>	Body Type:	<b>Die casting Aluminium</b>
CRI:	<b>&gt; 80</b>	IP Rating:	<b>IP65</b>
PF:	<b>&gt;0.95</b>	Dimension:	<b>230x136x206mm</b>



**Rechargeable**  
Portable

**20W** VT-4822

**5692 - 4500K Day White**  
**5735 - 6000K White**

**BOX QTY.**

**10**

EAN Code

3800157603515

3800157606929

Watts:	<b>20W</b>	Beam Angle:	<b>100°</b>
Voltage/Frequency:	<b>AC:100-240V,50/60Hz</b>	Color of Fixture:	<b>Green</b>
Luminous Flux:	<b>1600lm</b>	Body Type:	<b>Plastic + Aluminium</b>
CRI:	<b>/</b>	IP Rating:	<b>IP44</b>
PF:	<b>&gt;0.7</b>	Dimension:	<b>208 x 204 x 355mm</b>






3-in-1 Floodlight



18W VT-4818  
5745 - 6000K White

EAN Code  
3800157608268

BOX QTY.  
04



Power:	AC100-240V	Material:	ABS +Die casting Aluminium
Output:	18W	Image sensor:	1/4 " 1Megapixel CMOS
Detection Range:	0-12M	Video Compression:	H.264 /MJPEG dual video stream
Detect Angle:	180°	Max Image Resolution:	1280*720
Delay Time:	0-30S	Pixels:	1 million pixels
LED:	42PCS 0.2W	Size:	248x 162x 181mm
Luminous Flux:	600lm	Color of Fixture:	White






3-in-1 Floodlight



18W VT-4818  
5917 - 6000K White

EAN Code  
3800157620925

BOX QTY.  
04



Power:	AC100-240V	Material:	ABS +Die casting Aluminium
Output:	18W	Image sensor:	1/4 " 1Megapixel CMOS
Detection Range:	0-12M	Video Compression:	H.264 /MJPEG dual video stream
Detect Angle:	180°	Max Image Resolution:	1280*720
Delay Time:	0-30S	Pixels:	1 million pixels
LED:	42PCS 0.2W	Size:	248x 162x 181mm
Luminous Flux:	600lm	Color of Fixture:	Black








# LED Big Power Series



*Your Reliable Power Partner*

**120<sup>++</sup>**  
**HIGH LUMENS**

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

500W VT-47500

EAN Code

5696 - 6000K White




3800157603812

BOX QTY.

01

Sensor Compatible: <b>Yes</b>	Beam Angle: <b>120°</b>
Voltage/Frequency: <b>AC:100-240V,50/60Hz</b>	Color of Fixture: <b>Black</b>
Luminous Flux: <b>40000lm</b>	Body Type: <b>Die casting Aluminium</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>555 x 540 x 179mm</b>

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

600W VT-47600

EAN Code

5726 - 4500K Day White

3800157605854

BOX QTY.

01

Sensor Compatible: <b>Yes</b>	Beam Angle: <b>120°</b>
Voltage/Frequency: <b>AC:100-240V,50/60Hz</b>	Color of Fixture: <b>Black</b>
Luminous Flux: <b>48000lm</b>	Body Type: <b>Die casting Aluminium</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>540 x 625 x 179mm</b>

NEW



500W VT-49500

EAN Code

5934 - 4500K Day White  
5935 - 6000K White



3800157623605  
3800157623612

BOX QTY.



Sensor Compatible:	Yes	Beam Angle:	100°
Voltage/Frequency:	AC: 200-240, 50Hz	Color of Fixture:	Black
Luminous Flux:	60000lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	658 x 537 x 154mm

Luminous Intensity Distribution Curve(cd/klm)

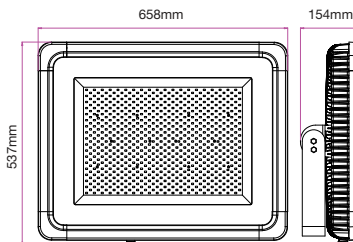

NEW



WITH LENS

MW  
MEAN WELL  
*Your Reliable Power Partner*

V-TAC®  
PRO

\*5 YEARS WARRANTY

500W VT-49501



EAN Code

5936 - 4000K Day White  
5937 - 6000K White

3800157624985  
3800157624992

BOX QTY.  
01

Sensor Compatible:	Yes	Beam Angle:	60°
Voltage/Frequency:	AC:100-240V, 50/60Hz	Color of Fixture:	Black
Luminous Flux:	60000lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	658 x 537 x 154mm

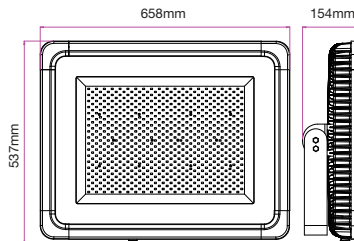

NEW



WITH LENS

MW  
MEAN WELL  
*Your Reliable Power Partner*

V-TAC®  
PRO

\*5 YEARS WARRANTY

1000W VT-491001

EAN Code



5938 - 4000K Day White  
5939 - 6000K White

3800157625005  
3800157625012

BOX QTY.

01

Sensor Compatible:	Yes	Beam Angle:	60°
Voltage/Frequency:	AC:100-240V, 50/60Hz	Color of Fixture:	Black
Luminous Flux:	120000lm	Body Type:	Die casting Aluminium
CRI:	>70	IP Rating:	IP65
PF:	>0.9	Dimension:	748 x 762 x 154mm

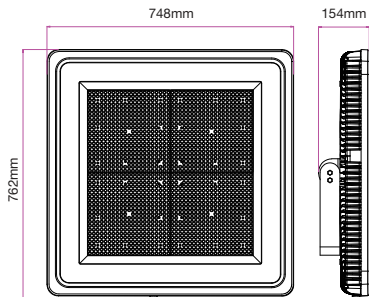



120<sup>++</sup> LM/W  
HIGH LUMENS

1000W VT-491000

EAN Code


5915 - 4500K Day White  
5916 - 6400K White

3800157619752  
3800157619769


BOX QTY: 01

Sensor Compatible: <b>Yes</b>	Beam Angle: <b>100°</b>
Voltage/Frequency: <b>AC: 100-240, 50/60HzV</b>	Color of Fixture: <b>Black</b>
Luminous Flux: <b>120000lm</b>	Body Type: <b>Die casting Aluminium</b>
CRI: <b>&gt;70</b>	IP Rating: <b>IP65</b>
PF: <b>&gt;0.9</b>	Dimension: <b>748 x 762 x 154mm</b>


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM




The Average Illuminance Effective Figure



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.




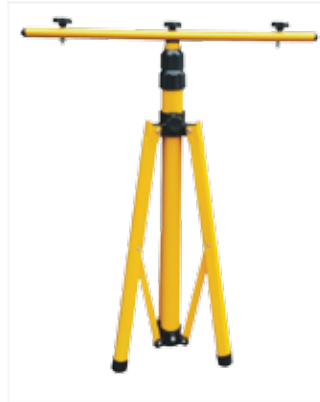

**Tripod Stand for Flood Lights (Yellow)**

BOX QTY.  
08

Model No	VT-41150
SKU Code	9104
EAN Code	3800230626202

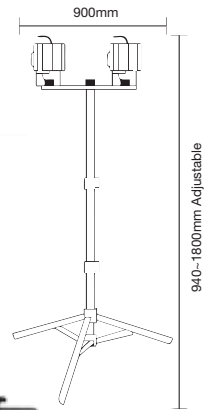

**Tripod Stand for Flood Lights (Black)**

BOX QTY.  
08

Model No	VT-41150
SKU Code	9546
EAN Code	3800157604925

**Waterproof Box Terminal Block**



RESISTANT



Wire range:0.5-2.5mm² Inside Terminal Block

Model No:	<b>VT-7224</b>
SKU Code:	<b>3578</b>
EAN Code:	<b>3800157605335</b>
Voltage:	<b>250V Max</b>
Material:	<b>Polypropylene (PP)</b>
Size:	<b>123x46x33mm</b>

**BOX QTY.**  
160

Model No	<b>VT-792</b>
SKU Code	<b>3621</b>
EAN Code	<b>3800157607735</b>

**BOX QTY.**  
500

Wire range:4-6.5mm



RESISTANT



Wire range:0.5-2.5mm² Inside Terminal Block

Model No:	<b>VT-7224</b>
SKU Code:	<b>5897</b>
EAN Code:	<b>3800157619202</b>
Voltage:	<b>250V Max</b>
Material:	<b>Polypropylene (PP)</b>
Size:	<b>123x46x33mm</b>

**BOX QTY.**  
240

Model No	<b>VT-792</b>
SKU Code	<b>5896</b>
EAN Code	<b>3800157619196</b>

**BOX QTY.**  
500


Wire range:4-6.5mm

**Billboard Stand For Flood Lights**

**BOX QTY.**  
04

Model No	<b>VT-794</b>
SKU Code	<b>3623</b>
EAN Code	<b>3800157607810</b>

**85cm** Suitable For:  
**10w - 20w - 30w - 50w**

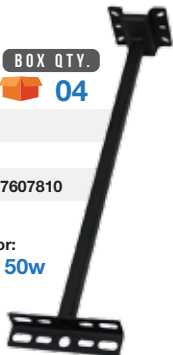

**BOX QTY.**  
04

Model No	<b>VT-793</b>
SKU Code	<b>3622</b>
EAN Code	<b>3800157607803</b>

**87cm** Suitable For:  
**70w - 100w - 120w - 150w - 200w**

