

10ACFEW_3 series
 10Watt - AC-DC converter

AC-DC Converter 10 Watt

- ⊕ Ultra-wide 85-305VAC & 100-430 VDC input range
- ⊕ Accepts AC or DC input (dual-use of same terminal)
- ⊕ Operating ambient temp. range -40°C to +85°C
- ⊕ Multi application, flexible layout
- ⊕ Compact size, high power density, green power
- ⊕ No-load power consumption as low as 0.1W
- ⊕ Output short circuit, over-current, over-voltage protection
- ⊕ Design meets IEC/EN61558, IEC/EN60335 standards
- ⊕ IEC/EN/UL62368 safety approved

10ACFEW_3 series is one of GAPTEC's highly efficient green power AC-DC Converter series. They feature wide input range accepting either AC or DC voltage, high efficiency, low power consumption and Class II reinforced insulation. All models are particularly suitable for industrial control, electric power, instrumentation and smart home applications which have high requirement for dimension and don't have high requirement on EMC. For extremely harsh EMC environment, we recommend using the application circuit show in Design Reference of this datasheet.



UL-62368-1 (E347551)

Common specifications	
Short circuit protection:	Hiccup, continuous, self-recovery
Cooling:	Free air convection
Operation temperature range:	-40°C to +85°C
Storage temperature range:	-40°C to +105°C
Storage humidity range:	< 95%
Power derating:	+55°C to +85°C: 2.5%/°C MIN 85VAC - 100VAC: 1.0%/VAC MIN 277VAC - 305VAC: 0.54%/VAC MIN
Safety standard:	IEC/EN/UL62368, IEC/EN60335, IEC/EN61558
Safety-regulated certification:	IEC/EN/UL62368
Safety class:	Class II
Hot plug:	Unavailable
Case material:	Plastic [UL94-V0]
Dimension:	32.00 x 17.20 x 15.05 mm
MTBF (MIL-HDBK-217F@25°C):	>1000,000 hours
Weight:	8.2g (Typ.)

Output specifications					
Item	Operating Conditions	Min	Typ	Max	Units
Output voltage accuracy*	3.3V 5V/9V/12V/15V/24V		±3 ±2		%
Line regulation	Rated load		±1		%
Load regulation	0% - 100% load		±1.5		%
Ripple & Noise*	20MHz Bandwidth (peak-peak value)		80	150	mV
Temperature Coefficient			±0.02		%/°C
Stand-by Power Consumption	230VAC : 3.3V/5V 230VAC : 9V/12V/15V 230VAC : 24V		0.05 0.09 0.13	0.10 0.12 0.15	W
Over-current Protection				≥110% Io	self-recovery
Min. load		0			%

Note: * The "parallel cable" method is used for ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.

Example:
10ACFW_03S3
 10 = 10Watt; AC = AC-DC; F = Open Frame; W = wide input
 03 = 3.3Vout; S = single output; 3 = 3,6kVAC isolation (5kVDC)

Input specifications					
Item	Operating Conditions	Min	Typ	Max	Units
Input voltage range	• AC Input • DC Input	85 100		305 430	VAC VDC
Input frequency		47		63	Hz
Input current	• 115VAC • 230VAC			0.30 0.18	A A
Inrush current	• 115VAC • 277VAC		15 30		A A
Recommended External Input Fuse	1A, slow-blow, required (The actual use needs to be selected according to the application environment)				

Isolation specifications					
Item	Operating Conditions	Min	Typ	Max	Units
Isolation voltage (input-output)	Electric Strength Test for 1min., leakage current < 5mA	3600		5000	VAC VDC

Note:

- External electrolytic capacitors are required to modules, more details refer to typical applications;
- This part is open frame, at least 6.4mm creepage distance between the primary and secondary external components of the module is needed to meet the safety requirement, refer to the recommended welding hole design in the external dimension drawing;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta = 25°C, humidity <75%, nominal input voltage (115V and 230V) and rated output load;
- All index testing methods in this datasheet are based on our company corporate standards;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.

10ACFEW_3 series

10Watt - AC-DC converter

Product Selection Guide



Approval	Model	Power [W]	Output [Vo]	Output [Io]	Efficiency [% , typ]	Capacitive load [μ F, max]
UL	10ACFEW_03S3	6.6	3.3V	2000mA	73	1500
UL	10ACFEW_05S3	10	5V	2000mA	77	1500
UL	10ACFEW_09S3	10	9V	1100mA	80	1000
UL	10ACFEW_12S3	10	12V	830mA	82	680
UL	10ACFEW_15S3	10	15V	670mA	82	470
UL	10ACFEW_24S3	10	24V	420mA	83	330

Note:



1. The nominal output voltage refers to the voltage applied to the load terminal after adding external circuits;
2. If the product is used in a severe vibration application, it needs to be glued and fixed.

Electromagnetic Compatibility (EMC)						
Emissions	CE	CISPR32/EN55032 CLASS A (Application circuit 1, 4) CISPR32/EN55032 CLASS B (Application circuit 2, 3)				
Emissions	RE	CISPR32/EN55032 CLASS A (Application circuit 1, 4) CISPR32/EN55032 CLASS B (Application circuit 2, 3)				
Immunity	ESD	IEC/EN 61000-4-2	Contact \pm 6KV		perf. Criteria B	
Immunity	RS	IEC/EN 61000-4-3	10V/m		perf. Criteria A	
Immunity	EFT	IEC/EN 61000-4-4 IEC/EN 61000-4-4	\pm 2kV (see application circuit 1, 2) \pm 4kV (see application circuit 3, 4)		perf. Criteria B perf. Criteria B	
Immunity	Surge	IEC/EN 61000-4-5 IEC/EN 61000-4-5	line to line \pm 1KV (Application circuit 1, 2) line to line \pm 2KV (Application circuit 3, 4)		perf. Criteria B perf. Criteria B	
Immunity	CS	IEC/EN 61000-4-6	10 Vr.m.s		perf. Criteria A	
Immunity	Voltage dip, short interruption and voltage variation	IEC/EN 61000-4-11	0%-70%		perf. Criteria B	


Product typical curve & Efficiency

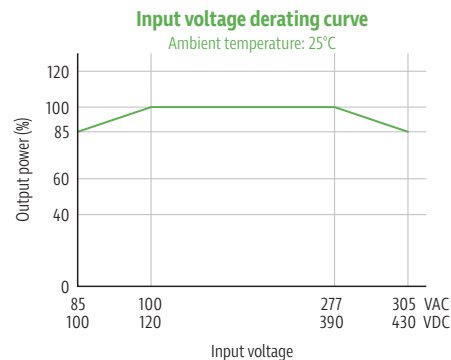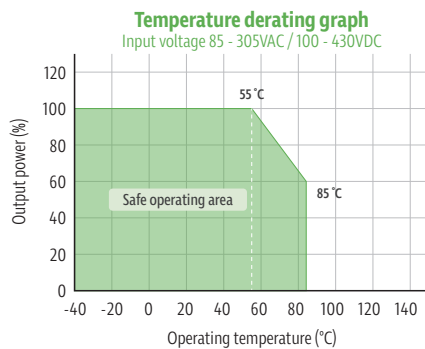

- ① With an AC input between 85 -100VAC/277- 305VAC and a DC input between 70 - 120VDC/390 - 430VDC, the output power must be derated as per temperature derating curves;
- ② This product is suitable for applications using natural air cooling; for applications in closed environment please consult factory or one of our FAE.

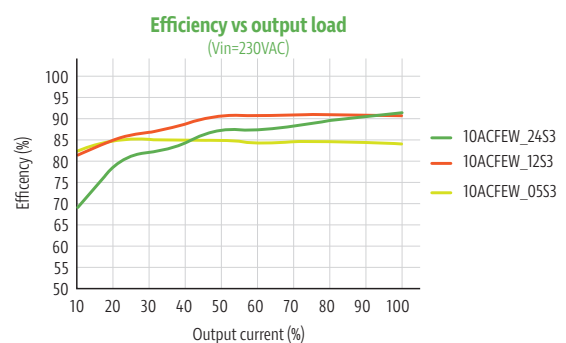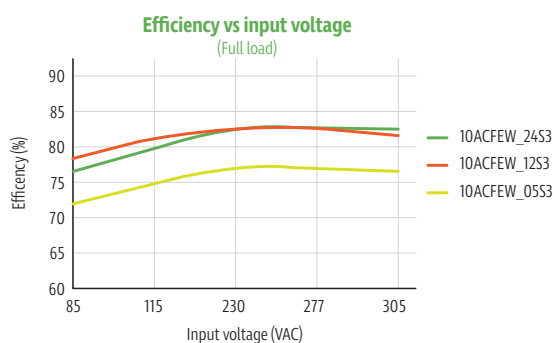

Typical application circuit

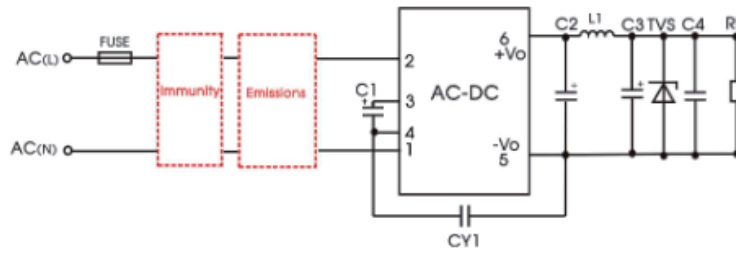

Additional circuits design reference

Additional components selection guide (No EMC devices)

Model	C1 (required)	C2 (required)	L1 (required)	C3 (required)	C4	CY1 (required)	TVS
10ACFEW_03S3	22μF/450V	820μF/16V (solid-state capacitor)	2μH/15mΩ Max/6.5A	150μF/35V	0.1μF/ 50V	1.0nF/ 400VAC	SMBJ7.0A
10ACFEW_05S3		270μF/16V (solid-state capacitor)		150μF/35V			SMBJ12A
10ACFEW_09S3				150μF/35V			SMBJ20A
10ACFEW_12S3		470uF/35V		220uF/35V			SMBJ30A
10ACFEW_15S3				220uF/35V			
10ACFEW_24S3				220uF/35V			


Note:

- C1 is used as filter capacitor with AC input (must be connected externally) and as EMC filter capacitor with DC input (must be connected), and it is recommended to use the capacitor with ripple current 300mA@100KHz.
- We recommend using an electrolytic capacitor with high frequency and low ESR rating for C3 (refer to manufacture's datasheet), electrolytic capacitor can be used for C2 when applied in normal and high temperature environments. Combined with C2, L1, they form a pi-type filter circuit. Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%, C4 is a ceramic capacitor, used for filtering high frequency noise.
- A suppressor diode (TVS) is recommended to protect the application in case of converter failure and specification should be 1.2 times of the output voltage.

Environmental Application EMC Solution


Environmental application EMC solution selection table

Recommended circuit	Application environmental	Typical industry	Input voltage range	Environment temperature (°C)	Emissions	Immunity
1	Basic application	None	85 ~ 305VAC	-40 to +85	CLASS A	CLASS III
2	Indoor civil environment	Smart home/Home appliances (2Y)		-25 to +55	CLASS B	CLASS III
	Indoor general environment	Intelligent building/Intelligent agriculture		-25 to +55	CLASS B	CLASS IV
3	Indoor industrial environment	Manufacturing workshop		-40 to +85	CLASS A	CLASS IV
4	Outdoor general environment	ITS/Video monitoring/Charging point/Communication/Security and protection				

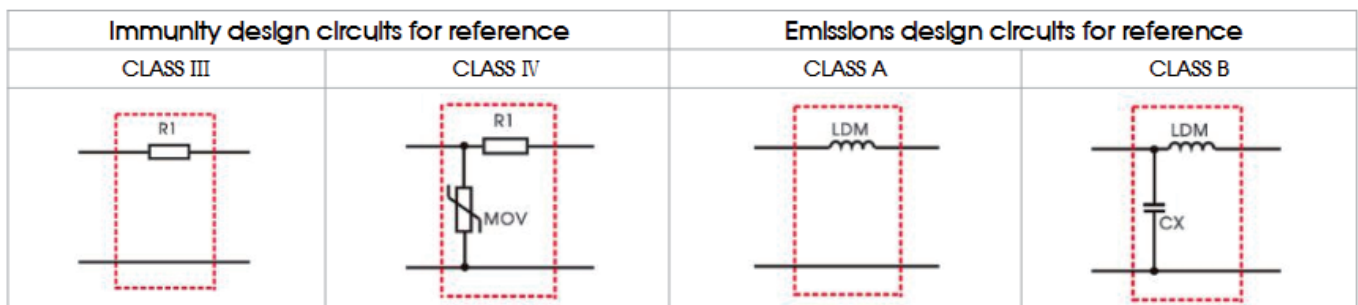

Electromagnetic Compatibility Solution-Recommended Circuit


1. Application circuit 1—Basic application

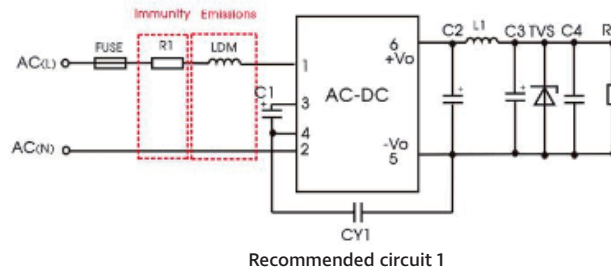

Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Basic application	-40°C to +85°C	CLASS III	CLASS A

Component	Recommended value
FUSE (required)	1A/300V, slow-blow
R1 (required)	12Ω/3W
LDM	4.7mH/Max: 15Ω/Min: 0.2A

2. Application circuit 2—Indoor civil / Universal system recommended circuits for general environment

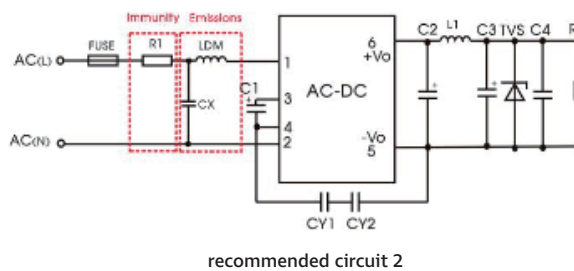

Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Indoor civil /general	-25°C to +55°C	CLASS III	CLASS B


Component	Recommended value
R1 (required)	6.8Ω/3W
LDM	2.2mH/Max: 4Ω/Min: 0.24A
CY1(CY2)	1.0nF/400VAC
CX	0.1μF/310VAC
FUSE (required)	1A/300V, slow-blow

Note 1: To meet the IEC/EN60335 certification, the two Y capacitors of the primary and secondary need to be externally connected (CY1/CY2, value at 2.2nF/250VAC);
 Note 2: According to the certification requirements, the X capacitor needs to be connected in parallel with the bleeder resistance, the recommended resistance value is less than 3.8MΩ, and the actual need to be selected according to the certification standard.

10ACFEW_3 series

10Watt - AC-DC converter

3. Application circuit 3—Universal system recommended circuits for indoor industrial environment

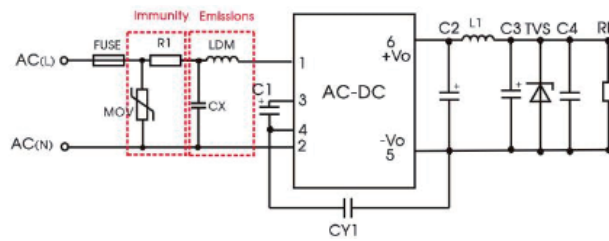


Recommended circuit 3

Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Indoor industrial	-25°C to +55°C	CLASS IV	CLASS B

Component	Recommended value
MOV	S14K350
CX	0.1μF/310VAC
CY1	1nF/400VAC
LDM	2.2mH/Max: 4Ω/Min: 0.24A
R1 (required)	6.8Ω/3W
FUSE (required)	2A/300V, slow-blow

Note: According to the certification requirements, the X capacitor needs to be connected in parallel with the bleeder resistance, the recommended resistance value is less than 3.8MΩ, and the actual need to be selected according to the certification standard.

4. Application circuit 4—Universal system recommended circuits for outdoor general environment

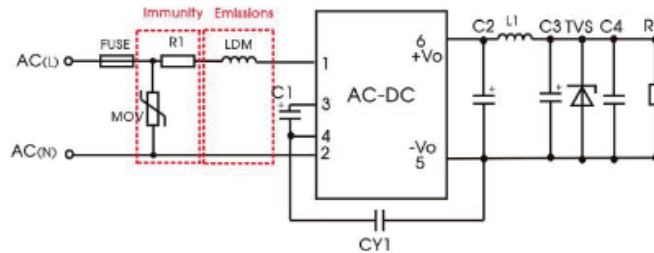



Recommended circuit 4

Application environmental	Ambient temperature range	Immunity CLASS	Emissions CLASS
Outdoor general environment	40°C to +85°C	CLASS IV	CLASS A

Component	Recommended value
MOV	S14K350
LDM	2.2mH/Max: 4Ω/Min: 0.24A
R1 (required)	6.8Ω/3W
FUSE (required)	2A/300V, slow-blow

Dimensions and Recommended Layout

THIRD ANGLE PROJECTION 

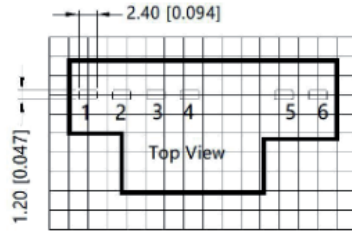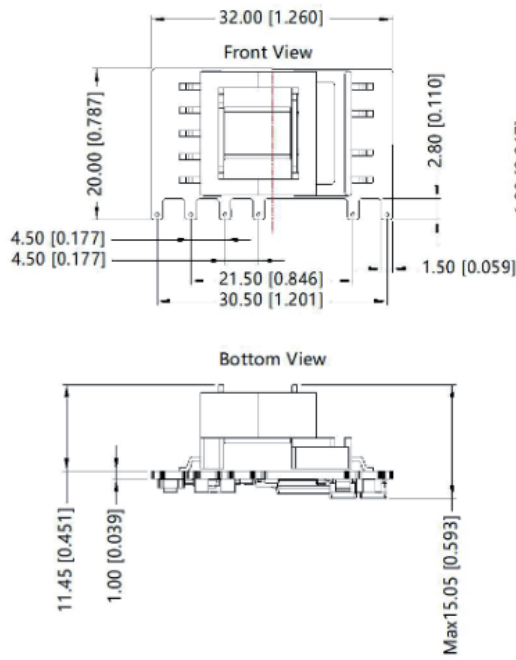

Note: Grid 2.54*2.54mm

Pin-Out	
Pin	Function
1	AC(N)
2	AC(L)
3	+V(CAP)
4	-V(CAP)
5	-Vo
6	+Vo

Note:
 Unit: mm[inch]
 General tolerances: $\pm 1.00[\pm 0.039]$
 The layout of the device is for reference only ,
 please refer to the actual product