

深圳长园电子材料有限公司
上海长园电子材料有限公司

Shenzhen Changyuan Electronic Material Co.,Ltd.

Shanghai Changyuan Electronic Material Co.,Ltd.

承 认 书

CERTIFICATION

客户名称: Customer Name:	产品名称: 硅树脂玻璃纤维套管/硅橡胶玻璃纤维套管 Products Name:			
承认规格: $\Phi 0.5-\Phi 25$ Products Range:	颜 色: 白 Standard :			
产品型号: SGS-12 SGS-15 SGS-25 SGS-40 SRS-70 Products Type:				
客 户 签 章	核 准 Approve	复 核 Re-Check	审 核 Check	主 办 Charge
	日 期 Date	日 期 Date	日 期 Date	日 期 Date

地址: 深圳南山区科技工业园科技路 30-4 栋 邮编 (P. C.): 518057

Add: Bld#30-4, Shenzhen Science & Technology Industry Park, Nanshan, Shenzhen, China

电话 (Tel): 0755-6553696 (16 线/Lines) 传真 (Fax): 0755-6630674 0755-6632551

地址: 上海市嘉定区嘉好路 1690 号 邮编 (P. C.): 201802

Add: No.1690, Jiahao Road, Nanxiang Town, Jiading, Shanghai, China

电话 (Tel): 021-69978827, 69978839

传真 (Fax): 021-69978838

一、特性参数 Specifications

项 目 Item	硅树脂玻璃纤维套管/硅橡胶玻璃纤维套管 Silicone Glassfiber sleeving/ Silicone Rubber Glassfiber sleeving
连续使用温度 (°C) Temperature Endurance	-10°C+200°C
耐温性 Temperature Endurance	200°C ± 2°C, 168h ≥ 1/2 原电压值
热老化 Aging Test	260°C, 6 小时, 无裂纹 260°C, 6h, No Cracking
冷弯曲 Cold Bend	无裂纹 No Cracking
自熄时间 (秒) Off-self Time (S)	10 秒 10S
水平燃烧 Horizontal Flame Test	≤ 30 秒 ≤ 30S
燃烧性 Flammability	VW-1
体积电阻率 (Ω . cm) Volume Resistivity	10 ¹¹
水解稳定性 Submerge Water Test	不发粘, 不变形, 不软化

型号 Type	测试条件 Testing Condition	平均电压 (伏) Average Voltage(v)	个别值 (伏) Individual Valune(V)
SGS-12	UL1441	1200	1000
SGS-15	UL1441	1500	1000
SGS-25	UL1441	2500	1800
SGS-40	UL1441	4000	3000
SRS-70	UL1441	7000	5000


b. 硅橡胶玻璃纤维套管

规格 Size	内径 (D) (mm) Inside Diameter	壁厚 (T) (mm) (内纤外胶)		壁厚 (T) (mm) (内胶外纤)
		4000V	7000V	7000V
Φ 0.5	0.5+0.25/-0	0.40±0.05	0.45±0.05	0.60±0.05
Φ 1.0	1.0+0.25/-0	0.40±0.05	0.45±0.05	0.60±0.05
Φ 1.5	1.5+0.25/-0	0.40±0.05	0.45±0.05	0.60±0.05
Φ 2.0	2.0+0.25/-0	0.40±0.05	0.45±0.05	0.60±0.05
Φ 2.5	2.5+0.30/-0	0.40±0.05	0.50±0.05	0.60±0.05
Φ 3.0	3.0+0.30/-0	0.40±0.05	0.50±0.05	0.70±0.07
Φ 3.5	3.5+0.40/-0	0.45±0.07	0.55±0.07	0.70±0.07
Φ 4.0	4.0+0.40/-0	0.45±0.07	0.55±0.07	0.70±0.07
Φ 4.5	4.5+0.40/-0	0.45±0.07	0.55±0.07	0.70±0.07
Φ 5.0	5.0+0.40/-0	0.45±0.07	0.55±0.07	0.70±0.07
Φ 6.0	6.0+0.55/-0	0.50±0.07	0.60±0.07	0.75±0.07
Φ 7.0	7.0+0.55/-0	0.50±0.07	0.60±0.07	0.75±0.07
Φ 8.0	8.0+0.55/-0	0.50±0.07	0.60±0.07	0.80±0.07
Φ 9.0	9.0+0.55/-0	0.50±0.07	0.60±0.07	0.80±0.07
Φ 10.0	10+0.75/-0	0.60±0.07	0.65±0.07	0.90±0.07
Φ 12.0	12+0.75/-0	0.60±0.07	0.65±0.07	0.90±0.07
Φ 13.0	13+0.90/-0	0.65±0.07	0.70±0.07	1.30±0.07
Φ 14.0	14+0.90/-0	0.65±0.07	0.70±0.07	1.30±0.07
Φ 15.0	15+0.90/-0	0.65±0.07	0.70±0.07	1.30±0.07
Φ 16.0	16+0.90/-0	0.65±0.07	0.70±0.07	1.30±0.07
Φ 17.0	17+0.90/-0	0.65±0.07	0.70±0.07	1.30±0.07
Φ 18.0	18+0.90/-0	0.65±0.07	0.70±0.07	1.30±0.07
Φ 19.0	19+0.90/-0	0.65±0.07	0.70±0.07	≥ 1.20
Φ 20.0	20+0.90/-0	≥ 0.65	≥ 0.70	≥ 1.20
Φ 25.0	25+0.90/-0.2	≥ 0.65	≥ 0.70	≥ 1.20

备注(Remark):

- 1、标准颜色为白色，可接受其他颜色订货 (Standard White ,Special Colors available on request) ;
- 2、可接受特殊规格产品订单 (Other sizes are available upon special order)

三、套管工程图 (Engineering Picture of Sleeving)

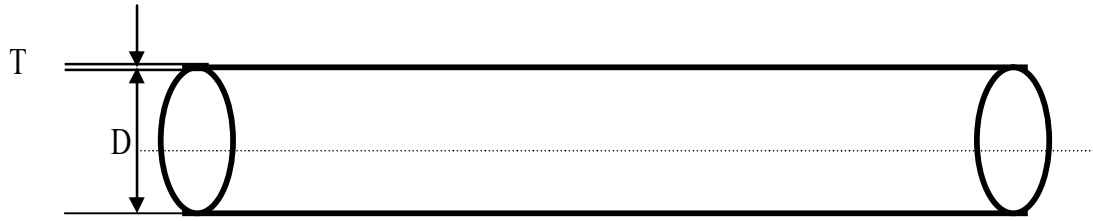

单位 (Unit) : 毫米 (mm)	日期 (Date) 13/02/28	名称 (Name) : 玻璃纤维套管	图号 (No.) : CY/CD-SGS, CY/CD-SRS
绘制 (Drawed by)	审核 (Checked by)	批准 (Approved by)	
韦玉怀	雷军	卞文剑	

四. 环保物质控制(Controlled hazardous substances)

Item	测试标准 Test Standard	测试结果 Test Result
镉 (Cd)	IEC 62321/2 111/95/CDV	<100ppm
铅 (Pb)	IEC 62321 111/95/CDV	<1000ppm
汞 (Hg)	IEC 62321 111/95/CDV	<1000ppm
铬 (Cr)	IEC 62321 111/95/CDV	<1000ppm
多溴联苯(PBBs)	IEC 62321 111/95/CDV	<1000ppm
多溴联苯醚(PBBEs)	IEC 62321 111/95/CDV	<1000ppm

五、材质说明:

硅树脂玻璃纤维套管是由无碱玻璃纤维纱织成管后，涂以硅树脂高温处理而成。硅橡胶玻璃纤维套管是由无碱玻璃纤维纱织成管后，涂以硅橡胶高温处理而成。具有良好的介电性、自熄性和柔软性，广泛应用于 H&N 级电机、家用电器、电热设备、特种灯具、电视及电子仪器的内部线束等绝缘保护。

Silicone fiberglass sleeving, woven as sleeving by non-alkali fiberglass and coated with silicone in high temperature. Silicone Rubber glassfiber Sleeving (inside fiber and outside rubber), woven as sleeving by non-alkali fiberglass and coated with silicone rubber in high temperature. It has excellent dielectricity, automatic quench and softness, widely used in the insulation protection of internal line cluster in H&N machinery, household electrical appliances, electric & heat device, special illuminations, TV set and electric instrument.

硅树脂玻璃纤维套管原材料名称			使用目的	含量
中文	ENGLISH	分子式		
玻璃纤维纱	Glassfiber	$\text{SiO}_2 + \text{Al}_2\text{O}_3 + \text{CaO}$	绝缘耐温	50%
硅树脂	Silicone	$(\text{SiO}_2)_n$	绝缘耐压	50%

硅橡胶玻璃纤维套管原材料名称			使用目的	含量
中文	ENGLISH	分子式		
玻璃纤维纱	Glassfiber	$\text{SiO}_2 + \text{Al}_2\text{O}_3 + \text{CaO}$	绝缘耐温	50%
硅橡胶油	Silicone Rubber	$((\text{CH}_3)_2\text{SiO})_n$	绝缘耐压	50%

上海长园电子材料有限公司

Changyuan Electronics (Shanghai) Co., Ltd

2019.2.28 质量部

UZIQ2.E347521
Sleeving, Flame Retardant - Component

[Page Bottom](#)

Sleeving, Flame Retardant - Component

[See General Information for Sleeving, Flame Retardant - Component](#)

CHANGYUAN ELECTRONICS (SHENZHEN) CO LTD

E347521

BLDG 30-4

SHENZHEN SCIENCE & INDUSTRY PARK

NAN SHAN

SHENZHEN, GUANGDONG 518057 CHINA

Flame retardant silicone coated sleeving: Model CB-SGS.

Marking: Company name, catalog designation and "VW-1" on the outside of the spool and on a separate tag on each end of the sleeving, or on the bundling wrapper or on the outside of the container.

[Last Updated](#) on 2011-06-03[Questions?](#)[Print this page](#)[Notice of Disclaimer](#)[Page Top](#)[Copyright • 2011 Underwriters Laboratories Inc.®](#)

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from Underwriters Laboratories Inc." must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "Copyright © 2011 Underwriters Laboratories Inc.®"