




Part Number : [5016464000](#)

Product Description : 2.00mm Pitch, iGrid Receptacle Crimp Housing, Dual Row, Positive Lock, 40 Circuits, Natural

Series Number : 501646

Status : Active

Product Category : Connector Housings

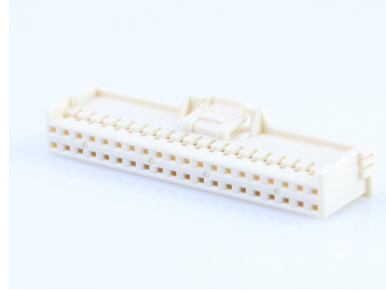

Documents & Resources

Drawings

[Drawing 5016464000_sd.pdf](#)

3D Models and Design Files

[2D Drawing DXF 5016464000.dxf](#)

[2D Drawing DXF \(PDF\) 5016464000.pdf](#)

[3D Model 5016464000_stp.zip](#)

Specifications

[Application Specification 5016460000-A00.pdf](#)

[Application Specification 5016460000-A01.pdf](#)

[Packaging Specification 5016469200-200.pdf](#)

[Product Specification 5016460000-PS-000.pdf](#)

[Product Specification 5016461000-PS-000.pdf](#)

[Product Specification 5016461001-PS-001.pdf](#)

[Product Specification PS-501646-001-001.pdf](#)

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Compliant per 2000/53/EC
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

[Multiple Part Product Compliance Statements](#)

- Eu RoHS

- REACH SVHC

- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C

- IPC 1752A Class D

- Molex Product Compliance Declaration

- IEC-62474

- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Active
Category	Connector Housings
Series	501646
Description	2.00mm Pitch, iGrid Receptacle Crimp Housing, Dual Row, Positive Lock, 40 Circuits, Natural
Application	Signal, Wire-to-Board
Product Family	iGrid Wire-to-Board Dual-Row System
Product Name	iGrid
UPC	822350087285

Agency

CSA	LR19980
UL	E29179

Physical

Circuits (maximum)	40
Color - Resin	Natural
Flammability	94V-0
Gender	Receptacle
Glow-Wire Capable	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	Nylon

Net Weight	1110.000/mg
Number of Rows	2
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40° to +105°C

Mates With / Use With

Mates with Part(s)

Description	Part Number
iGrid Vertical, Dual Row, Through Hole Headers	<u>501645</u>
iGrid Vertical, Dual Row, Through Hole Headers	<u>503091</u>
iGrid Right-Angle, Dual Row, Through Hole Headers	<u>501876</u>
iGrid Right-Angle, Dual Row, Through Hole Headers	<u>208659</u>

Use with Part(s)

Description	Part Number
iGrid Female Crimp Terminals	<u>501647</u>
iGrid Female Crimp Terminals	<u>501648</u>
iGrid Female Crimp Terminals	<u>503095</u>

This document was generated on Mar 04, 2024