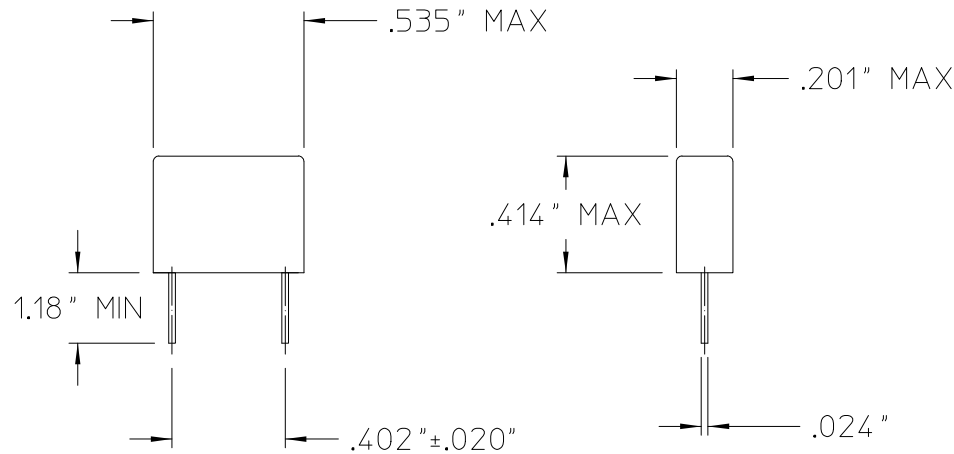


VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION	DATE	APPROVED
02	RELEASED PER ECO 2321	JC	1/15/91
03	REDRAWN AND REVISED PER E980221	PEI	7/2/98
04	REVISED PER E990209	GCK	5/19/99
5	REVISED PER E064291	PEI	03/20/06





NOTES:

1. APPROVALS INCLUDE SEMKO, NEMKO, DEMKO, FI, VDE, SEV, OVE, IMQ, UL, CSA.
2. RoHS COMPLIANT, LEAD FREE PER CST-0001 LATEST REVISION.

ELECTRICAL SPECIFICATIONS

RATED VOLTAGE	250 VAC
CAPACITANCE	4700 pF
CAPACITANCE TOLERANCE	±20%
CLASS	Y CLASS
DISSIPATION FACTOR	≤1.3% @ 1kHz
DIELECTRIC VOLTAGE	2700 VDC
INSULATION RESISTANCE @ 500VDC	≥ 12000MΩ
RECOMMENDED VOLTAGE IN DC APPLICATION	≤ 1000 VDC
TEMPERATURE RANGE	-40°C TO +100°C

DRAWN BY <i>P.E.IENI</i>	DATE 7/2/98	 CAPACITOR - (Y) 4700 pF ±20%, 250 VAC		
<small>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES - TOLERANCES ARE: FRACTIONS DECIMALS ANGLES *1/64 .XX=+.01 ±1° .XXX=+.005</small>				
THIRD ANGLE PROJECTION 	SIZE B	FSCM NO. 67131	DWG NO. 01000	REV 5
DO NOT SCALE DRAWING	SCALE 2:1	SHEET 1 OF 1		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vicor:](#)

[01000](#)