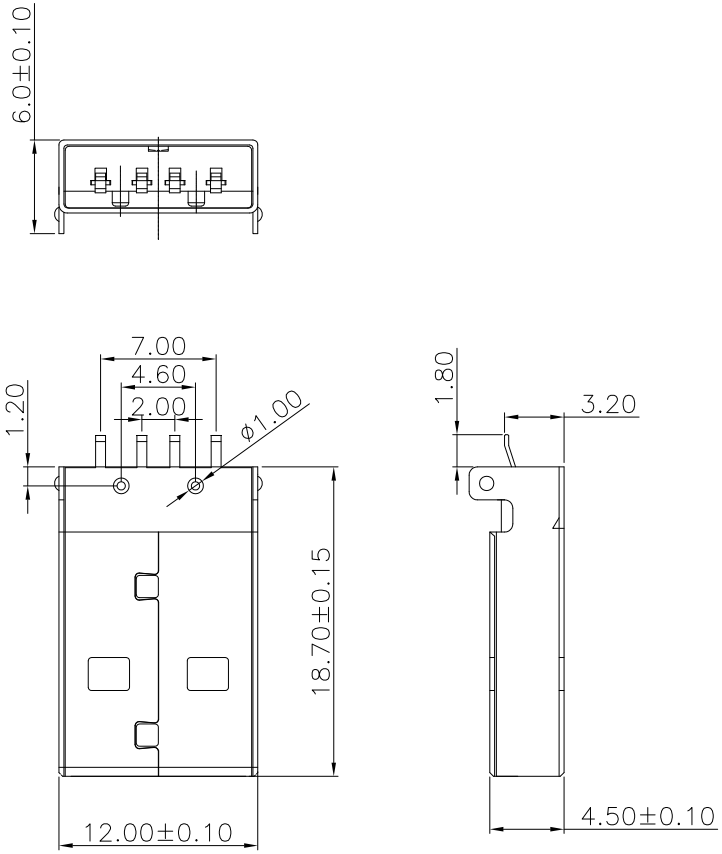

Specifications:
Current Rating: 1.5A AC/DC
Voltage Rating: 30V AC/DC
Contact Resistance: 20m Ohm. Max.
Insulation Resistance:1000M Ohm. Min.
Withstanding Voltage: 750V AC/Minute
Operating Temperature Range:−40°C ~ +105°C
Materials:
Insulator:LCP(UL94V−0)
Insulator Color:White
Contact: Brass
Plating:30u" Gold Plated on Contact Area,
Tin Plated on Solder Tails.
B Shell:Brass,Nickel Plated

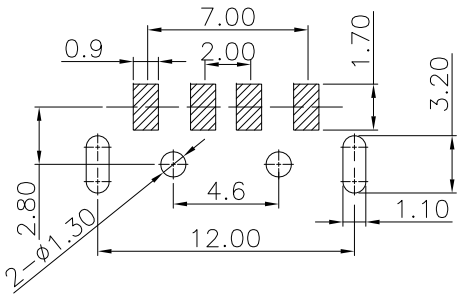

PCB layout

RoHS Compliant

REV	DATE	FILE	BY
	05−FEB−2020		

DRAWN:

CHECKED:

APPROVAL:

GENERAL TOLERANCE:
.X=±0.20
.XX=±0.15

UNIT: MM

SCALE:1:1

SHEET: 1 / 2

PROJECTION:

CnC Tech
Industrial Cable and Connector Technology

DESCRIPTION:
USB A Male SMD Type,30u"

PART NO:
1002-016-01101

SIZE
A4

Downloaded from Arrow.com.