

AMP POWER TAP

TE Internal #: 5055556-9 Power Terminals, Power Tap, Terminates To Printed Circuit Board, 10 Position, 2.54 mm [.1 in] Centerline, Vertical, Stamped & Formed, Tin, Tin

View on TE.com >

Terminals & Splices > Power Terminals



Power Terminal Type: Power Tap Product Terminates To: Printed Circuit Board Number of Positions: 10 Contact Current Rating (Max): 37.8 A Centerline (Pitch): 2.54 mm [.1 in]

Features



Product Type Features

Footprint	7.62 x 2.54 mm[.3 x .1 in]
Power Terminal Type	Power Tap
Configuration Features	
Number of Positions	10
PCB Mount Orientation	Vertical
Body Features	
Terminal Profile	Low
Contact Features	
PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Finish	Matte
Contact Underplating Material	Nickel
Contact Current Rating (Max)	37.8 A
Contact Fabrication	Stamped & Formed
Contact Mating Area Plating Material	Tin

C For support call+1 800 522 6752

5055556-9

Power Terminals, Power Tap, Terminates To Printed Circuit Board, 10 Position, 2.54 mm [.1 in] Centerline, Vertical, Stamped & Formed, Tin, Tin



Contact Mating Area Plating Material Thickness	3.81 μm[150 μin]
PCB Contact Termination Area Plating Material	Tin
PCB Contact Termination Area Plating Material Thickness	3.81 μm[150 μin]
Contact Base Material	Copper Alloy
Termination Features	
Termination Method to Printed Circuit Board	Through Hole - Press-Fit
Termination Method to Wire & Cable	Tap Screw
Product Terminates To	Printed Circuit Board
Mechanical Attachment	
Thread Size	M4
Housing Features	
Housing Material	Nylon - GF
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
PCB Thickness (Recommended)	1.57 – 3.18 mm[.062 – .125 in]
Product Length	12.7 mm[.5 in]
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
Packaging Features	
Packaging Method	Box
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.

C For support call+1 800 522 6752

5055556-9

Power Terminals, Power Tap, Terminates To Printed Circuit Board, 10 Position, 2.54 mm [.1 in] Centerline, Vertical, Stamped & Formed, Tin, Tin




Solder Process Capability

Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts

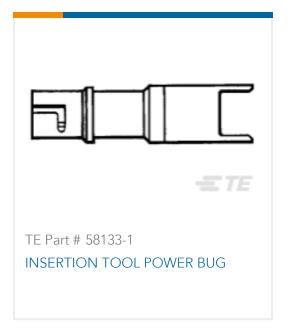

Customers Also Bought

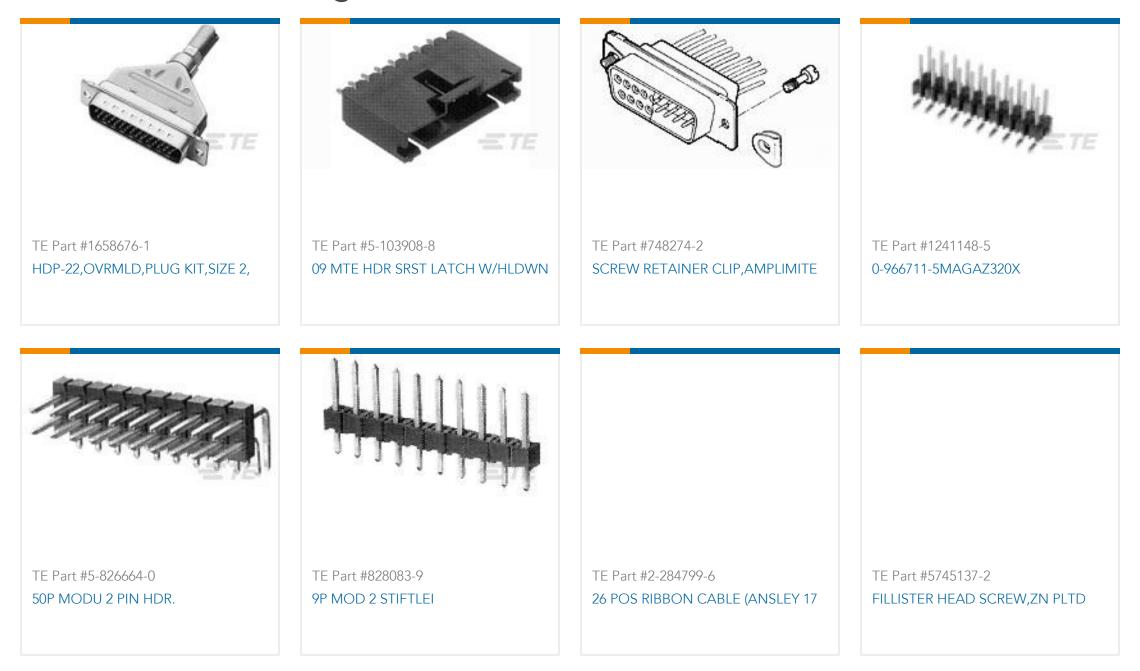

Documents

Product Drawings 10 POWER TAP ASSY .125

C For support call+1 800 522 6752

5055556-9

Power Terminals, Power Tap, Terminates To Printed Circuit Board, 10 Position, 2.54 mm [.1 in] Centerline, Vertical, Stamped & Formed, Tin, Tin



English

CAD Files Customer View Model ENG_CVM_CVM_5055556-9_A.2d_dxf.zip
English
3D PDF
3D
Customer View Model ENG_CVM_CVM_5055556-9_A.3d_igs.zip
English
Customer View Model ENG_CVM_CVM_5055556-9_A.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages POWER_CONNECTORS_CATALOG_SEC02_CABLE_MOUNTED

English

PRINTED CIRCUIT BOARD TERMINALS AND DISCONNECTS

English

Product Specifications

Application Specification

English

Product Environmental Compliance

MD_5055556-9_11252016555_dmtec

English

MD_5055556-9_11252016555_dmtec

English