



**Part Number :** [22057058](#)


**Product Description :** KK 254 Wire-to-Board Header, Right-Angle, with Friction Lock, 5 Circuits

**Series Number :** 7395

**Status :** Active

**Product Category :** PCB Headers and Receptacles

**Engineering Number :** A-7395-5B

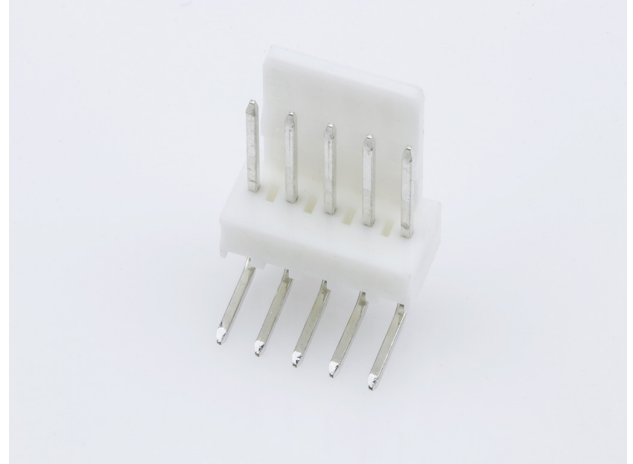

---

## Documents & Resources

### Drawings

[Drawing 022057058\\_sd.pdf](#)

[Packaging Design Drawing PK-7478-001-000.pdf](#)

### 3D Models and Design Files

[3D Model 022057058\\_stp.zip](#)

### Specifications


[Product Specification PS-99020-0088-001.pdf](#)

[Product Specification PS-10-07-001.pdf](#)

---

## Product Environment Compliance

### Compliance

GADSL/IMDS	Compliant with Exemption 44; 33
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

### Multiple Part Product Compliance Statements

- Eu RoHS

- REACH SVHC

- Low-Halogen

### Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

### EU RoHS Certificate of Compliance

---

## Part Details

### General

Status	Active
Category	PCB Headers and Receptacles
Series	7395
Description	KK 254 Wire-to-Board Header, Right-Angle, with Friction Lock, 5 Circuits
Application	Signal, Wire-to-Board
Component Type	PCB Header
Product Family	KK Interconnect Systems
Product Name	KK 254
UPC	800753592803

### Agency

CSA	LR19980
UL	E29179

### Electrical

Current - Maximum per Contact	4.0A
Voltage - Maximum	500V

### Physical

Breakaway	No
Circuits (Loaded)	5
Circuits (maximum)	5
Color - Resin	Natural (White)

Durability (mating cycles max)	25
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Net Weight	0.671/g
Number of Rows	1
Orientation	Right Angle
Packaging Type	Bag
PC Tail Length	3.80mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	5.080µm
Plating min - Termination	5.080µm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	No
Stackable	No
Temperature Range - Operating	See Product Specification
Termination Interface Style	Through Hole

## Solder Process Data

Max-Duration	5
Lead-Free Process Capability	WAVE
Max-Cycle	1
Max-Temp	235

---

## Mates With / Use With

### Mates with Part(s)

Description	Part Number
KK 254 Single Row Crimp Housings	<u>2695</u>

---

This document was generated on Feb 12, 2024