


### PRODUCT SPECIFICATION

# **Ni-MH Battery**

#### NH-AA2700AR

#### **Dimensions**

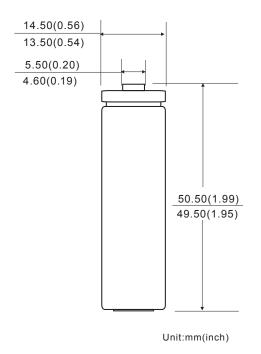

### **Specifications**

Chemical System: Nickel Metal Hydride

IEC Name: HR6M
ANSI/NEDA: 1.2H2(AA)
Camelion Model: NH-AA2700AR

Average Weight: 29.5g

Dimension( $\emptyset$  x H ): 14.0 $^{\pm 0.5}$  x 50.0 $^{\pm 0.5}$  mm

 $0.56^{\pm0.02} \times 1.97^{\pm0.02}$  inch

Terminals: Flat
Nominal Voltage: 1.2Volts
Internal Resistance: 35m-ohm

Capacity(420mA constantly discharge to 1.0V at 25±2℃)

Minimum: 2400mAh Typical: 2700mAh Operating Temperature:  $-10^{\circ}$ C- $50^{\circ}$ C Storage Temperature:  $15^{\circ}$ C- $25^{\circ}$ C Relative Humidity:  $60\pm15^{\circ}$ 

### **Usage Guide**



Shaver



Toy



Digital Still Camera

#### **Cautions**

#### Storage

Store the battery in a cool, dry and well-ventilated area.

#### Handling

1) Do not heat or disposed in fire or water. Do not modify or disassemble the battery. Do not short-circuit positive (+) and negative (-) terminals.

Keep away from metal or other conductive materials.

- 2) Keep away from infants. If infant happens to swallow the battery, consult a doctor immediately.
- 3) When the battery is stored or disposed, isolate positive (+) and negative (-) terminals of the battery to avoid those terminals touch each other.
- 4) In case the battery electrolyte happen to come into mouth,gargle well enough and consult a doctor immediately.

#### Notice:

Environmental elements comply with 2006/66/EC and US LAW 104-142 requirements. This data sheet is typical information specific to products manufactured at the time of its publication. For the latest information, contact us at: info@camelionbattery.com.


## PRODUCT SPECIFICATION

#### NH-AA2700AR

## **Ni-MH Battery**


# Storage for 24months

Measurement temperature:20±2℃ Storage procedure:storage for 24months, measure the voltage and then perform capacity test

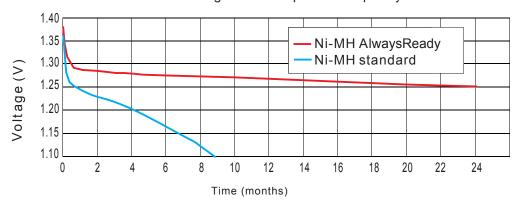


## **Charge Characteristics**

Measurement temperature:25±2°C

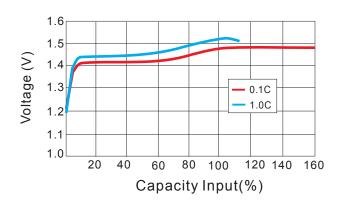


## Discharge Characteristics

Measurement temperature:  $25\pm2^{\circ}$ C Charge: 0.1C×16hrs

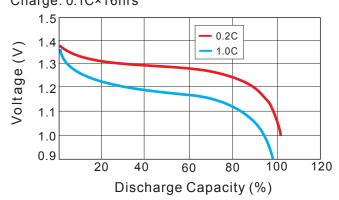


## IEC Cycle Life Curve

Measurement temperature: $25\pm2^{\circ}$ C Procedure: According to IEC61951-2(2011) 7.5.1.2

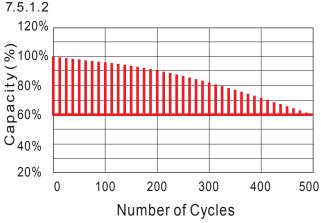

# **Temperature Characteristics**

Procedure: Charge 16hrs by 0.1C; Rest for 60mins Discharge to 1.0V by 0.2C

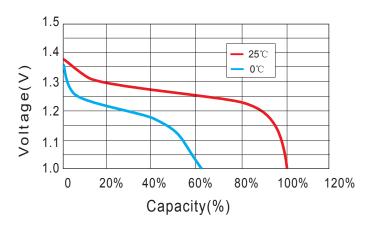

#### Notice:

Environmental elements comply with 2006/66/EC and US LAW 104-142 requirements. This data sheet is typical information specific to products manufactured at the time of its publication. For the latest information, contact us at: info@camelionbattery.com.