

# Crimp Information Sheet

Terminal Part Number: 12052456  
 Surface Plating: SN  
 Material Thickness [mm]: 0,40  
 Cross Section [mm<sup>2</sup>]: 3,00 | 5,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1005  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 3,00 - 4,07  
 Seal(s): 15324996 | 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 3,00 / 15324994		3,13	250	2,00	0,05	3,65	0,10	6,80	0,20	6,70	0,20
1005 5,00 / 15324996		3,89	300	2,20	0,05	3,70	0,10	6,70	0,20	6,70	0,20

Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN

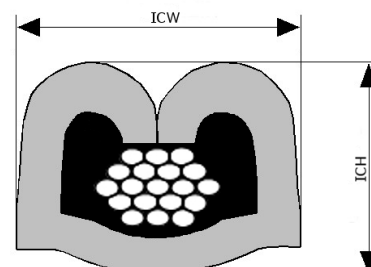

# Crimp Information Sheet

Terminal Part Number: 12052456  
 Surface Plating: SN  
 Material Thickness [mm]: 0,40  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*


Cable Type codes: 1005  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 3,00 - 3,25  
 Seal(s): 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 3,00 / 15324994		3,13	250	2,10	0,05	3,70	0,10	6,80	0,20	6,70	0,20

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN



# Crimp Information Sheet

Terminal Part Number: 12052456  
 Surface Plating: SN  
 Material Thickness [mm]: 0,40  
 Cross Section [mm<sup>2</sup>]: 5,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1005  
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED  
 Insulation Range  $\Phi$ [mm]: 3,70 - 4,07  
 Seal(s): 15324996

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 5,00 / 15324996		3,89	300	2,20	0,05	3,70	0,10	6,70	0,20	6,70	0,20

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN

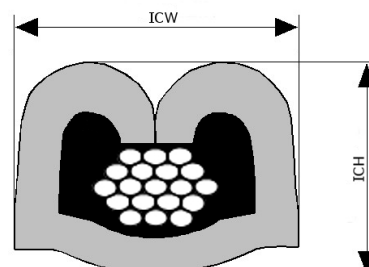

# Crimp Information Sheet

Terminal Part Number: 12052456  
 Surface Plating: SN  
 Material Thickness [mm]: 0,40  
 Cross Section [mm<sup>2</sup>]: 3,00 | 5,00

*This document is non-contractual  
 and for information only.*

*For more information, please  
 consult your local sales office*



Cable Type codes: 1007  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 3,45 - 4,70  
 Seal(s): 15324994 | 15324996

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 3,00 / 15324994		3,63	250	2,10	0,05	3,70	0,10	6,70	0,20	6,70	0,20
1007 5,00 / 15324996		4,45	300	2,20	0,05	3,70	0,10	6,70	0,20	6,70	0,20

Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR

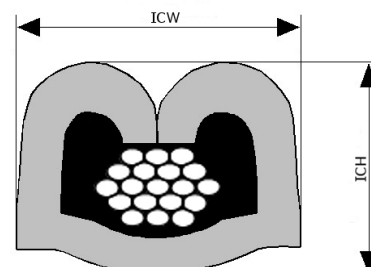

# Crimp Information Sheet

Terminal Part Number: 12052456  
 Surface Plating: SN  
 Material Thickness [mm]: 0,40  
 Cross Section [mm<sup>2</sup>]: 3,00 | 5,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*



Cable Type codes: 1007  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 3,45 - 4,70  
 Seal(s): 15324994 | 15324996

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 3,00 / 15324994		3,63	250	2,10	0,05	3,70	0,10	6,70	0,20	6,70	0,20
1007 5,00 / 15324996		4,45	300	2,20	0,05	3,70	0,10	6,70	0,20	6,70	0,20

Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR

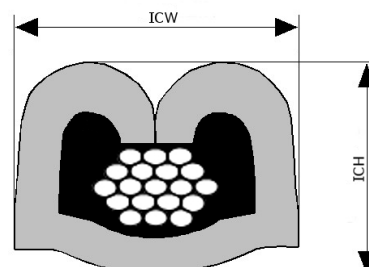

# Crimp Information Sheet

Terminal Part Number: 12052456  
 Surface Plating: SN  
 Material Thickness [mm]: 0,40  
 Cross Section [mm<sup>2</sup>]: 5,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1007  
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED  
 Insulation Range  $\Phi$ [mm]: 4,20 - 4,70  
 Seal(s): 15324996

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 5,00 / 15324996		4,45	300	2,20	0,05	3,70	0,10	6,70	0,20	6,70	0,20

## Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR

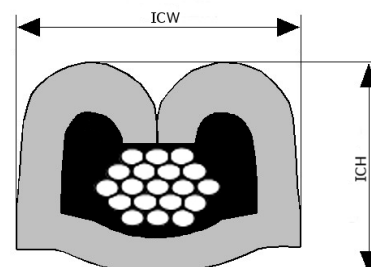

# Crimp Information Sheet

Terminal Part Number: 12052456  
 Surface Plating: SN  
 Material Thickness [mm]: 0,40  
 Cross Section [mm<sup>2</sup>]: 3,00 | 5,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1009  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 4,00 - 5,33  
 Seal(s): 15324996 | 15324993 | 12059257

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 3,00 / 15324996		4,13	250	2,10	0,05	3,70	0,10	6,80	0,20	6,70	0,20
1009 5,00 / 15324993		5,07	300	2,20	0,05	3,70	0,10	6,80	0,20	7,70	0,20
1009 5,00 / 12059257		5,07	300	2,20	0,05	3,70	0,10	6,80	0,20	7,70	0,20

## Cable type code legend:

1009:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL

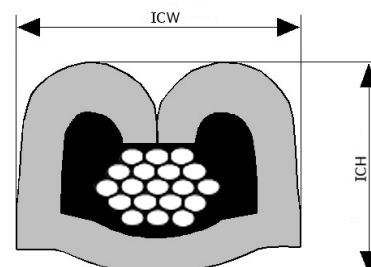

# Crimp Information Sheet

Terminal Part Number: 12052456  
 Surface Plating: SN  
 Material Thickness [mm]: 0,40  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1009  
 Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD  
 Insulation Range  $\Phi$ [mm]: 4,00 - 4,25  
 Seal(s): 15324996

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 3,00 / 15324996		4,13	250	2,10	0,05	3,70	0,10	6,80	0,20	6,70	0,20

## Cable type code legend:

1009:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL

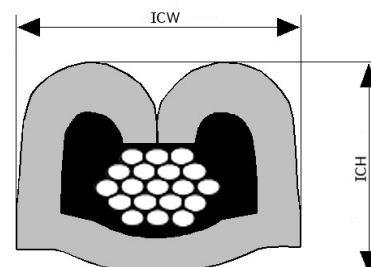



# Crimp Information Sheet

Terminal Part Number: 12052456  
 Surface Plating: SN  
 Material Thickness [mm]: 0,40  
 Cross Section [mm<sup>2</sup>]: 5,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*



Cable Type codes: 1009  
 Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED  
 Insulation Range  $\Phi$ [mm]: 4,80 - 5,33  
 Seal(s): 15324993

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 5,00 / 15324993		5,07	300	2,20	0,05	3,70	0,10	6,80	0,20	7,70	0,20

## Cable type code legend:

1009:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: SPECIAL

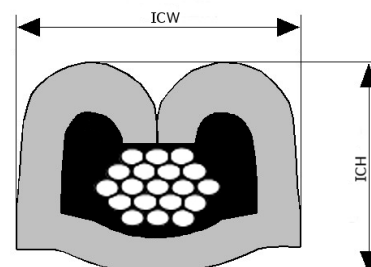

# Crimp Information Sheet

Terminal Part Number: 12052456  
 Surface Plating: SN  
 Material Thickness [mm]: 0,40  
 Cross Section [mm<sup>2</sup>]: 2,50 | 4,00



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2005  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,70 - 3,80  
 Seal(s): 12059260 | 12059258

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2005 2,50 / 12059258		2,85	372	1,95	0,05	3,55	0,10	6,05	0,20	6,70	0,20
2005 4,00 / 12059260		3,60	341	2,15	0,05	3,60	0,10	6,15	0,20	6,70	0,20

## Cable type code legend:

2005: FLR2X (SAAB C)  
 Industry Designator: ISO  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE  
 Insul. Wall Designator: THIN

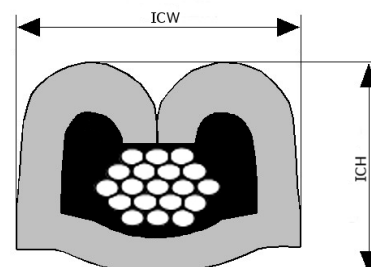

# Crimp Information Sheet

Terminal Part Number: 12052456  
 Surface Plating: SN  
 Material Thickness [mm]: 0,40  
 Cross Section [mm<sup>2</sup>]: 2,50 | 3,00 | 4,00

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*

Cable Type codes: 2010  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,60 - 3,70  
 Seal(s): 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 2,50 / 15324994		2,80	225	1,90	0,05	3,60	0,10	6,30	0,20	6,60	0,20
2010 3,00 / 15324994		3,10	260	2,05	0,05	3,60	0,10	6,15	0,20	6,70	0,20
2010 4,00 / 15324994		3,45	265	2,25	0,05	3,70	0,10	6,90	0,20	6,70	0,20

## Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

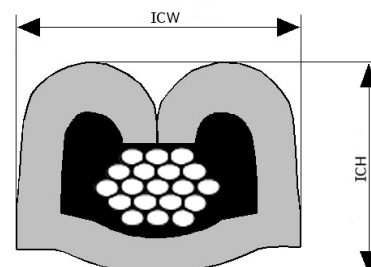

# Crimp Information Sheet

Terminal Part Number: 12052456  
 Surface Plating: SN  
 Material Thickness [mm]: 0,40  
 Cross Section [mm<sup>2</sup>]: 2,50 | 4,00



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2017  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,60 - 3,70  
 Seal(s): 12059258

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 2,50 / 12059258		2,80	480	1,95	0,05	3,55	0,10	6,05	0,20	6,70	0,20
2017 4,00 / 12059258		3,45	409	2,15	0,05	3,60	0,10	6,20	0,20	6,80	0,20

## Cable type code legend:

2017: FLR41X-B, FLRY-A  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PA, PP, PVC, XLPE  
 Insul. Wall Designator: THIN

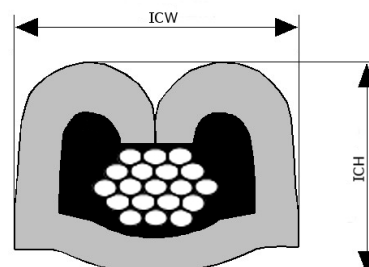

# Crimp Information Sheet

Terminal Part Number: 12052456  
 Surface Plating: SN  
 Material Thickness [mm]: 0,40  
 Cross Section [mm<sup>2</sup>]: 3,00

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 3002  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 3,40 - 3,80  
 Seal(s): 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3002 3,00 / 15324994		3,60	240	2,10	0,05	3,65	0,10	6,80	0,20	6,70	0,20

## Cable type code legend:

3002:

Industry Designator: JIS/JA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPVC  
 Insul. Wall Designator: REGULAR

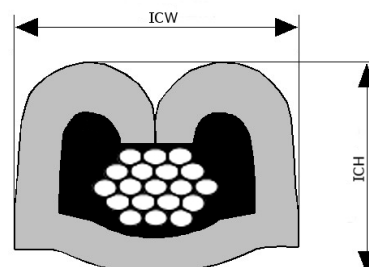

# Crimp Information Sheet

Terminal Part Number: 12052456  
 Surface Plating: SN  
 Material Thickness [mm]: 0,40  
 Cross Section [mm<sup>2</sup>]: 2,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 8000  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,70 - 3,00  
 Seal(s): 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
8000 2,50 / 15324994		2,85	225	1,90	0,05	3,60	0,10	6,30	0,20	6,60	0,20

## Cable type code legend:

8000:

Industry Designator: N/G  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: SYNTHRESIN  
 Insul. Wall Designator: THIN

