




ISO/VDMA Cylinder *Series C95*

ø32, ø40, ø50, ø63, ø80, ø100, ø125, ø160, ø200, ø250

Conforming to ISO 6431/CETOP RP43P/VDMA 24562

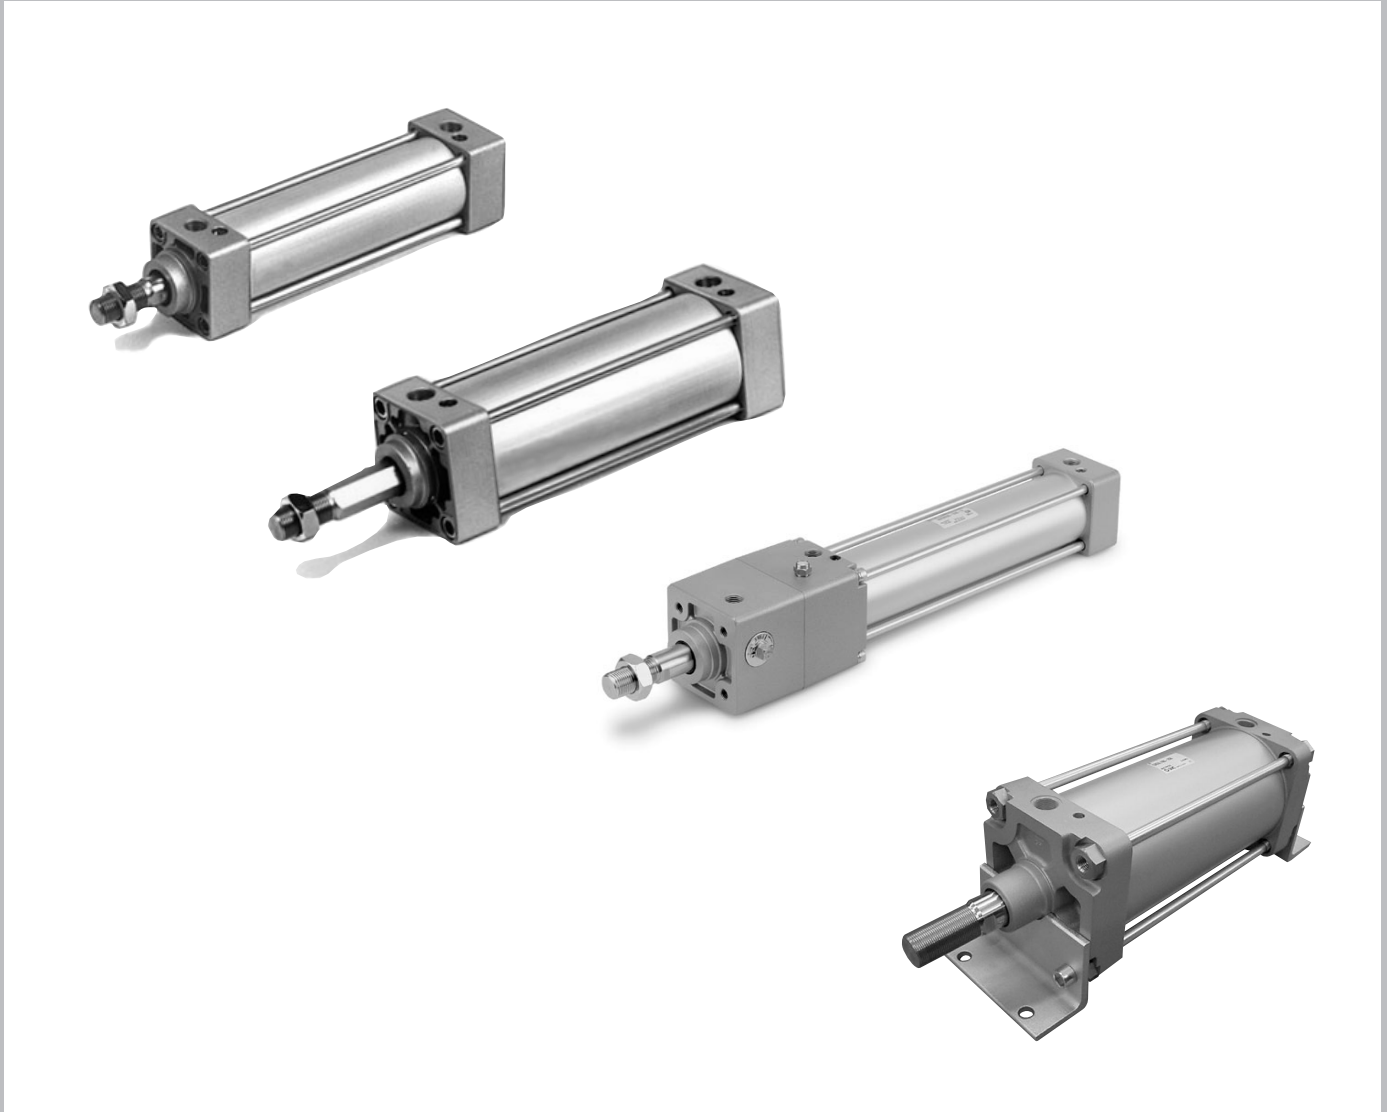

Quick Reference
Guide

C55

C85

C76

CP95

C95

-X
(Made to Order)

D-
(Auto Switch)

Model Selection
Procedures

Series C95

Model Selection

Execution	Model	Bore Size						Adjustable Stroke End Cushioning	Options Piston Rod			
		32	40	50	63	80	100		Standard Hard Chrome	W	R	K
Standard Type	C95 SB	●	●	●	●	●	●	●	●	○	○	○
	C95 SDB	●	●	●	●	●	●	●	●	○	○	○
With Mounting Centre Trunnion	C95 ST	●	●	●	●	●	●	●	●	○	○	—
	C95 SDT	●	●	●	●	●	●	●	●	○	○	—
Non-Rotating Piston Rod	C95 KB	●	●	●	●	●	●	●	—	○	●	—
	C95 KDB	●	●	●	●	●	●	●	—	○	●	—
Non Rotating Piston Rod with Centre Trunnion	C95 KT	●	●	●	●	●	●	●	—	○	●	—
	C95 KDT	●	●	●	●	●	●	●	—	○	●	—
With Lock	C95 NB	●	●	●	●	●	●	●	●	○	—	—
	C95 NDB	●	●	●	●	●	●	●	●	○	—	—
Non Rotating Piston Rod with Centre Trunnion	C95 NT	●	●	●	●	●	●	●	●	○	—	—
	C95 NDT	●	●	●	●	●	●	●	●	○	—	—
With Positioner	C95PB	—	—	●	●	●	●	●	●	—	—	—
	C95 PDB	—	—	●	●	●	●	●	●	—	—	—
Low Friction Cylinder	C95 QB ^{-CA} _{-CB}	●	●	●	●	●	●	—	●	—	○	○
	C95 QDB ^{-CA} _{-CB}	●	●	●	●	●	●	—	●	—	○	○
Low Friction Cylinder with Centre Trunnion	C95 QT ^{-CA} _{-CB}	●	●	●	●	●	●	—	●	—	○	—
	C95 QDT ^{-CA} _{-CB}	●	●	●	●	●	●	—	●	—	○	—

W = Double/through rod

R = Stainless Steel Piston Rod

K = Stainless & Acid-Proof Piston Rod & Nickel Plated Tie Rods

○ Options
● Standard

ISO Cylinder/Standard: Double Acting

Series C95

ø32, ø40, ø50, ø63, ø80, ø100

How to Order

Standard C95SD B 32 100 W A53 S

Built-in magnet ●

Mounting ●

B	Basic/Without bracket
L	Axial foot
F	Front flange
G	Rear flange
C	Single rear clevis
D	Double rear clevis
T	Centre trunnion

Bore size ●

32	32mm
40	40mm
50	50mm
63	63mm
80	80mm
100	100mm

Auto switch ●

—	Without auto switch
S	1
3	3
n	n

□ Refer to table below for selection of applicable auto switch.

Number of auto switches

Auto switch

Rod Specifications

W	Hard chromed rod as standard
R	Double/through rod
R	Stainless steel piston rod
K	stainless steel and acid-proof piston rod
F	Rod boot

Stroke (mm)
Refer to standard stroke table on p. 6-4

Applicable Auto Switches/Tie rod mounting

Style	Special function	Electrical entry	Indicator	Load voltage			Auto switch model	Lead wire (m)			Applicable load	Mounting bracket	
				Wiring (Output)	DC	AC		0.5 (—)	3 (L)	5 (Z)			
Reed switch	—	Grommet	Yes	3 wire (Equiv. to NPN)	—	5V	—	A56	●	●	—	IC	ø32,ø40 BT-03
					—	12V	—	A53	●	●	—		
				24V	5V,12V	100V,200V	A54	●	●	●	—		
					12V	200V or less	A67	●	●	—	IC		
Diagnosis indication (2 colour)	—	Grommet	No	2 wire	—	—	—	A64	●	●	—	IC	ø32,ø40 BT-03
					—	—	—	A59W	●	●	—		
				24V	5V,12V	—	F59	●	●	○	IC		
					—	—	100V,200V	F5P	●	●	○	—	
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	5V,12V	—	J51	●	●	○	—	ø50,ø63 BT-05
				2 wire	—	12V	F59W	●	●	○	IC		
												3 wire (NPN)	
				3 wire (PNP)	—	—	—	J59W	●	●	○		
												2 wire	
				3 wire (NPN)	—	5V,12V	—	F5NT	—	●	○		
												4 wire (NPN)	
				—	—	—	—	F5LF	●	●	○		

Table ①
Auto Switch Mounting Bracket for D-M9□

Bore size (mm)	Order No.
ø32, ø40	BMB5-032
ø50, ø63	BA7-040
ø80, ø100	BA7-063

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch model		Lead wire length (m) ^{Note}			Applicable load	Mounting bracket												
					DC	AC	Vertical	Lateral	0.5 (Nil)	3 (L)	5 (Z)														
Reed switch	—	Grommet	Yes	3 wire	—	5V	—	—	Z76	●	●	—	IC circuit	—											
															24V	100V	—	Z73	●	●	●	—	Relay PLC		
No	5V, 12V	100V or less	—	Z80	●	●	—	IC circuit																	
									Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	Y69A	Y59A	●	●	○	IC circuit	ø50,ø63 BMB4-050		
3 wire (PNP)	—	100V,200V	Y7PV	Y7P	●	●	○	—																	
													2 wire	—	12V	Y69B	Y59B	●	●	○	—				
3 wire (NPN)	24V	5V, 12V	—	Y7NWV	Y7NW	●	●	○														IC circuit			
													3 wire (PNP)	—	—	—	Y7PWV	Y7PW	●	●	○			—	
2 wire	24V	12V	—	Y7BWW	Y7BW	●	●	○														—			
													—	—	—	—	Y7BA	—	●	—	—				
Connector and Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	M9NV	M9N	●														●		○	IC circuit
													3 wire (PNP)	—	M9PV	M9P	●	●	○						
																				2 wire	—				


□ Lead wire length 0.5m..... — (Example: A53)
3m..... L (Example: A53L)
5m..... Z (Example: A53Z)

○: Manufactured upon receipt of order.

Series C95



ISO Symbol
Double acting



Minimum Strokes for Auto Switch Mounting

Refer to p.6-32 for "Minimum Strokes for Auto Switch Mounting".

Specifications

Bore size	ø32	ø40	ø50	ø63	ø80	ø100
Action	Double acting					
Fluid	Air					
Proof pressure	1.5MPa					
Max. operating pressure	1.0MPa					
Min. operating pressure	0.05MPa					
Ambient and fluid temperature	Without magnet -10 to 70°C (No freezing)					
	With magnet -10 to 60°C (No freezing)					
Lubrication	Not required (Non-lube)					
Operating piston speed	50 to 1000mm/s					
Allowable stroke tolerance	to 250: ${}^{+1.0}_0$, 251 to 1000: ${}^{+1.4}_0$, 1001 to 1500: ${}^{+1.8}_0$					
Cushion	Both ends (Air cushion)					
Thread tolerance	JIS class 2					
Port size	G1/8	G1/4	G1/4	G3/8	G3/8	G1/2
Mounting	Basic, axial foot, front flange, rear flange, Floating joint, single rear clevis, double rear clevis, center trunnion					

Standard Stroke

Bore size (mm)	Standard stroke (mm)	Max. □ stroke
32	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500	700
40	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500	800
50	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500, 600	1200
63	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500, 600	1200
80	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500, 600	1400
100	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500, 600	1500


Intermediate strokes are available.
Please consult with SMC for longer strokes.

Mounting Bracket, Mounting Accessories

Description	Bore size	ø32	ø40	ø50	ø63	ø80	ø100
L	Foot ⁽¹⁾	L5032	L5040	L5050	L5063	L5080	L5100
F,G	Flange	F5032	F5040	F5050	F5063	F5080	F5100
C	Single rear clevis	C5032	C5040	C5050	C5063	C5080	C5100
D	Double rear clevis	D5032	D5040	D5050	D5063	D5080	D5100
DS	Double rear clevis (for ES accessory)	DS5032	DS5040	DS5050	DS5063	DS5080	DS5100
ES	Angled rear clevis with ball joint	ES5032	ES5040	ES5050	ES5063	ES5080	ES5100
E	Angled rear clevis	E5032	E5040	E5050	E5063	E5080	E5100
C95-S	Trunnion pivot bracket	C95-S03	C95-S04	C95-S04	C95-S06	C95-S06	C95-S10
GKM	Rod clevis	GKM10-20	GKM12-24	GKM16-32	GKM16-32	GKM20-40	GKM20-40
KJ	Piston rod ball joint	KJ10D	KJ12D	KJ16D	KJ16D	KJ20D	KJ20D
JA	Floating joint	JA30-10-125	JA40-12-125	JA50-16-150	JA50-16-150	JAH50-20-150	JAH50-20-150

- Note 1) Two foot brackets required for one cylinder.
 Note 2) Accessories for each mounting bracket are as follows.
 Foot, Flange, Single clevis: Mounting bolts
 Double rear clevis: (D,DS): Clevis pin
 Note 3) C95-S: Set of 2 pcs.
 Note 4) GKM according to ISO 8140
 Note 5) KJ according to ISO 8139
 Note 6) Piston rod nut is standard

Theoretical Force

(Unit : N) 

Bore size (mm)	Rod diameter (mm)	Operating direction	Piston area (mm ²)	Operating pressure (MPa)								
				0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
32	12	OUT	804	161	241	322	402	482	563	643	724	804
		IN	691	138	207	276	346	415	484	553	622	691
40	16	OUT	1257	251	377	503	629	754	880	1006	1131	1257
		IN	1056	211	317	422	528	634	739	845	950	1056
50	20	OUT	1963	393	589	785	982	1178	1374	1570	1767	1963
		IN	1649	330	495	660	825	989	1154	1319	1484	1649
63	20	OUT	3117	623	935	1247	1559	1870	2182	2494	2805	3117
		IN	2803	561	841	1121	1402	1682	1962	2242	2523	2803
80	25	OUT	5027	1005	1508	2011	2514	3016	3519	4022	4524	5027
		IN	4536	907	1361	1814	2268	2722	3175	3629	4082	4536
100	30	OUT	7854	1571	2356	3142	3927	4712	5498	6283	7068	7854
		IN	7147	1429	2144	2859	3574	4288	5003	5718	6432	7147

(Note) Theoretical force(N) = Pressure (MPa) X Piston area (mm²)


Weight Table

Bore size (mm)		32	40	50	63	80	100
Basic weight	Basic	0.56	0.84	1.39	1.91	3.22	4.24
	Foot	0.16	0.20	0.38	0.46	0.89	1.09
	Flange	0.20	0.23	0.47	0.58	1.30	1.81
	Single clevis	0.16	0.23	0.37	0.60	1.07	1.73
	Double clevis	0.20	0.32	0.45	0.71	1.28	2.11
	Trunnion	0.15	0.26	0.34	0.56	1.03	1.71
Additional weight per 50 stroke	All mounting brackets	0.11	0.16	0.26	0.27	0.42	0.56
Accessories	Single rod clevis	0.15	0.23	0.26	0.26	0.60	0.83
	Double rod clevis (with pin)	0.22	0.37	0.43	0.43	0.87	1.27

Calculation example: C95SD40-100

- Basic weight 0.84 (Basic, ø40)
 - Additional weight ... 0.16/50 stroke
 - Cylinder stroke 100 stroke
 - Mounting 0.32 (Double clevis)
- 0.84+0.16 X 100/50+0.32=1.48kg


Allowable Kinetic Energy

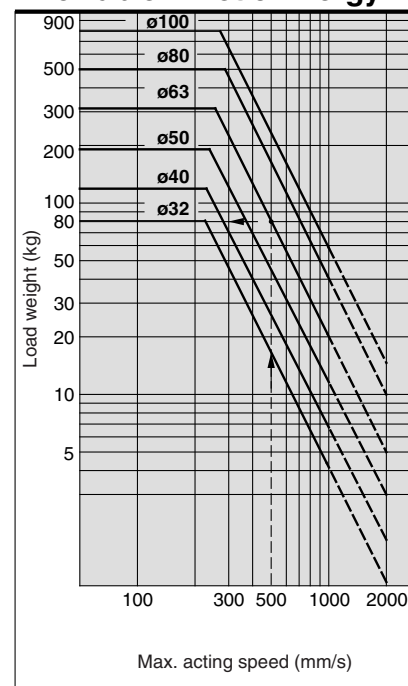

Example: Load limit at rod end when air cylinder ø63 is actuated with max. actuating speed 500mm/s. See the intersection of lateral axis 500mm/s and ø63 line, and extend the intersection to left. Thus the allowable load is 80kg.

Series C95

Construction

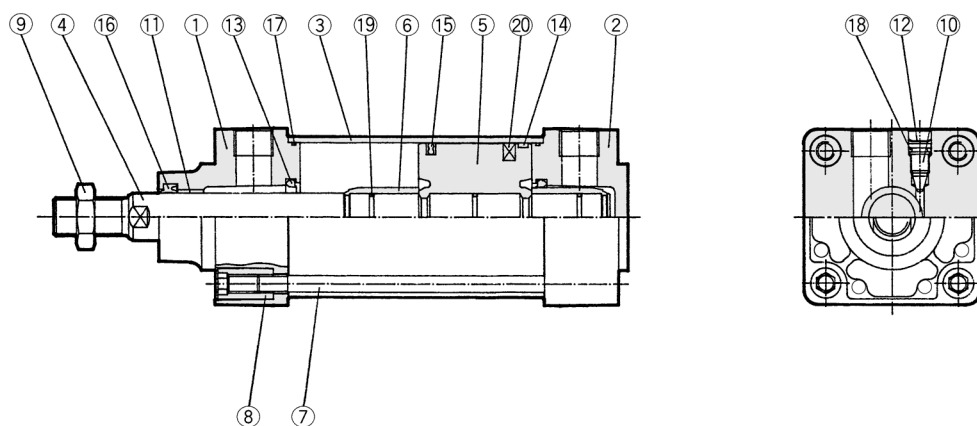

Component Parts

No.	Description	Material	Note
①	Rod cover	Aluminum die cast	
②	Head cover	Aluminum die cast	
③	Cylinder tube	Aluminum die cast	
④	Piston rod	C45 anodised steel	
⑤	Piston	Aluminum die cast	
⑥	Cushion ring	Brass	
⑦	Tie rod	Steel	(chromated)
⑧	Tie rod nut	Steel	(chromated)
⑨	Mounting nut	Steel	(chromated)
⑩	Cushion adjustment screw	Steel	(chromated)
⑪	Bushing	Bronze bush	
⑫	Serrated washer	Steel	(chromated)
⑬	Cushion seal	PUR	


No.	Description	Material	Note
⑭	Wearing	Resin	
⑮	Piston seal	NBR	
⑯	Rod seal/Gasket	NBR	
⑰	Cylinder tube gasket	NBR	
⑱	Cushion screw seal	NBR	
⑲	Piston gasket	NBR	
⑳	Magnet ring		

Seal Kits


Bore size (mm)	Kit No.	Contents
32	CK95-32	Kits include items 13 to 17.
40	CK95-40	
50	CK95-50	
63	CK95-63	
80	CK95-80	
100	CK95-100	

Without Mounting Bracket

C95SB \emptyset -Stroke

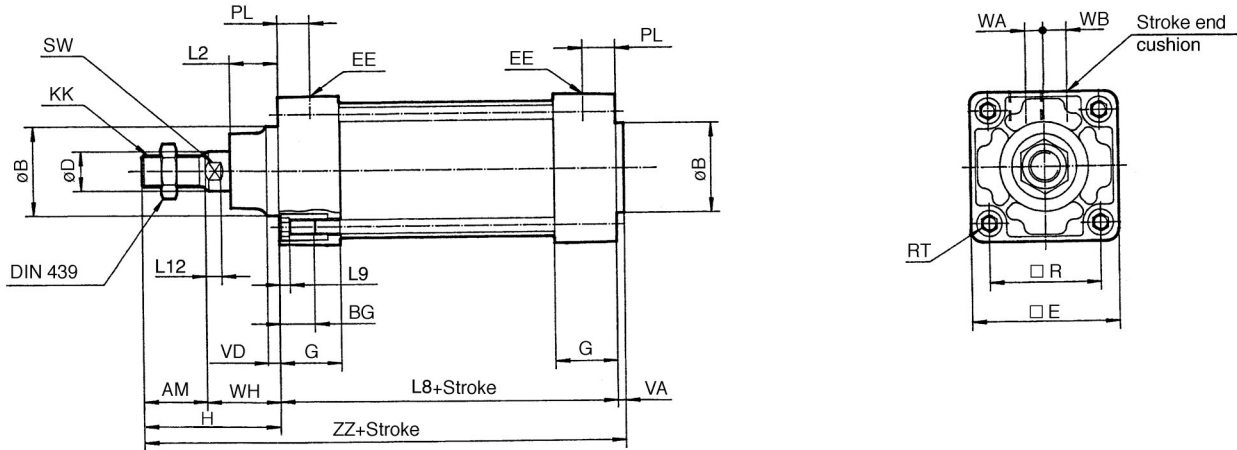

C95SB \emptyset -Stroke W


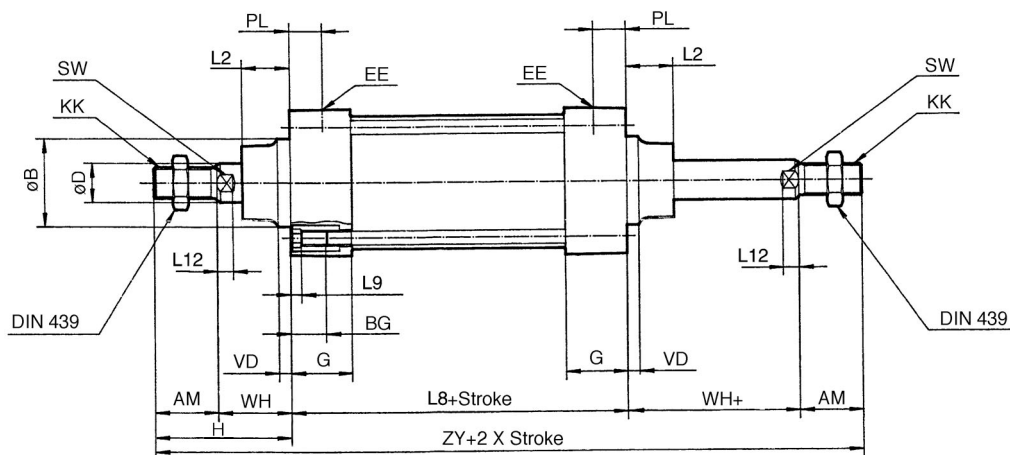


Bore (mm)	AM	$\emptyset B_{e11}$	$\emptyset D$	EE	PL	RT	L12	KK	SW	G	BG	L8	VD	VA	WA	WB	WH	ZZ	ZY	$\square E$	$\square R$	L2	L9	H
32	22	30	12	G1/8	13	M6	6	M10 X 1.25	10	27	16	94	4	4	4	6.5	26	146	190	46	32.5	15	4	48
40	24	35	16	G1/4	14	M6	6.5	M12 X 1.25	13	27	16	105	4	4	4	9	30	163	213	52	38	17	4	54
50	32	40	20	G1/4	15.5	M8	8	M16 X 1.5	16	31.5	16	106	6	4	5	10.5	37	179	244	65	46.5	24	5	69
63	32	45	20	G3/8	16.5	M8	8	M16 X 1.5	16	31.5	16	121	6	4	9	12	37	194	259	75	56.5	24	5	69
80	40	45	25	G3/8	19	M10	10	M20 X 1.5	21	38	16	128	8	4	11.5	14	46	218	300	95	72	30	5	86
100	40	55	30	G1/2	19	M10	10	M20 X 1.5	21	38	16	138	8	4	17	15	51	233	320	114	89	32	5	91



Series C95

With Mounting Bracket


Foot L

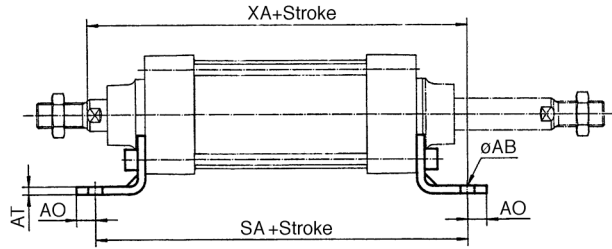


Centre Trunnion T

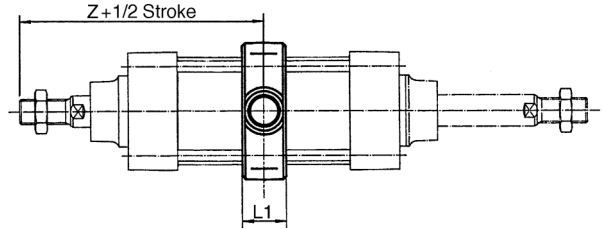


Flange F






Mounting at the back

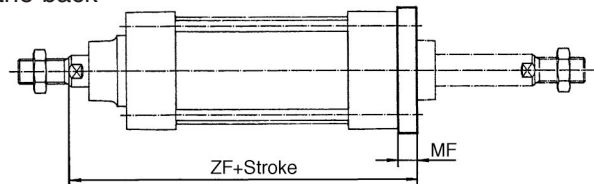

Mounting at the front

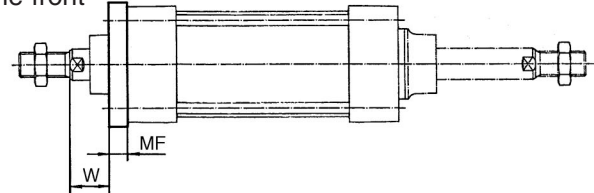


Rear single clevis C Rear double clevis D

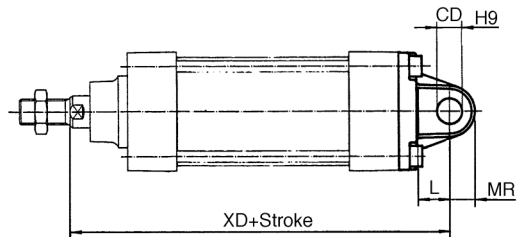

Bore (mm)	E1	R	W	MF	ZF	øFB	CD	EB	L	XD	UB	CB	EW	MR	TR	AO	AT	XA	SA	AH	øAB	L1	Z	TL	øTD	TM	UW	TF	UF	E2
32	48	32	16	10	130	7	10	65	12	142	45	26	26	9.5	32	10	4.5	144	142	32	7	17	95	12	12	50	49	64	79	50
40	55	36	20	10	145	9	12	75	15	160	52	28	28	12	36	11	4.5	163	161	36	10	22	106.5	16	16	63	58	72	90	55
50	68	45	25	12	155	9	12	80	15	170	60	32	32	12	45	12	5.5	175	170	45	10	22	122	16	16	75	71	90	110	70
63	80	50	25	12	170	9	16	90	20	190	70	40	40	16	50	12	5.5	190	185	50	10	28	129.5	20	20	90	87	100	120	80
80	100	63	30	16	190	12	16	110	20	210	90	50	50	16	63	14	6.5	215	210	63	12	34	150	20	20	110	110	126	153	100
100	120	75	35	16	205	14	20	140	25	230	110	60	60	20	75	16	6.5	230	220	71	14.5	40	160	25	25	132	136	150	178	120


Rod boot (gaiter)

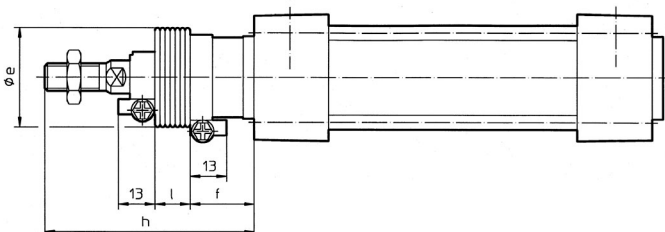


Bore (mm)	e max	f	l					h				
			Stroke 1-50	Stroke 51-100	Stroke 101-150	Stroke 151-200	Stroke 201-300	Stroke 1-50	Stroke 51-100	Stroke 101-150	Stroke 151-200	Stroke 201-300
32	42	23	12.5	25	37.5	50	75	75	88	100	113	138
40	43	23	12.5	25	37.5	50	75	75	88	100	113	138
50	52	25	12.5	25	37.5	50	75	87	100	112	125	150
63	52	25	12.5	25	37.5	50	75	87	100	112	125	150
80	58	29	12.5	25	37.5	50	75	103	116	128	141	166
100	65	29	12.5	25	37.5	50	75	103	116	128	141	166

Accessories

Rear single clevis C

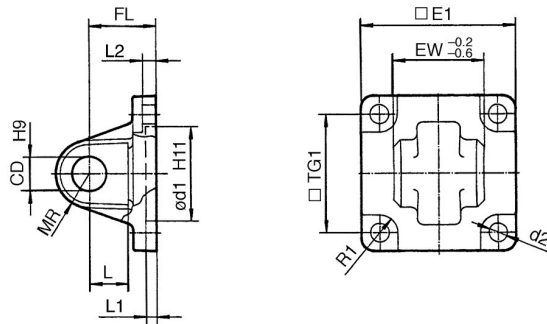


Rear double clevis D

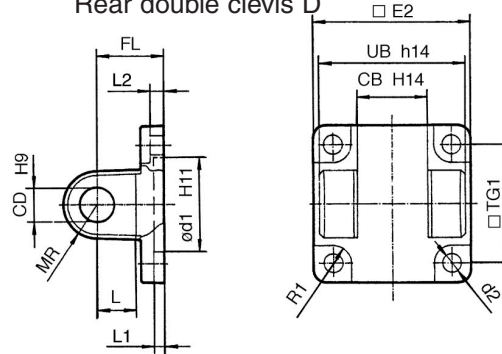


Bore (mm)	□E1	EW	□TG1	FL	L1	L	L2	ød1	CD	MR	d2	R1	□E2	UB	CB
32	45	26	32.5	22	5	12	5.5	30	10	9.5	6.6	6.5	48	45	26
40	51	28	38	25	5	15	5.5	35	12	12	6.6	6.5	56	52	28
50	64	32	46.5	27	5	15	6.5	40	12	12	9	8.5	64	60	32
63	74	40	56.5	32	5	20	6.5	45	16	16	9	8.5	75	70	40
80	94	50	72	36	5	20	10	45	16	16	11	11	95	90	50
100	113	60	89	41	5	25	10	55	20	20	11	12	115	110	60

Rear Single Clevis DS

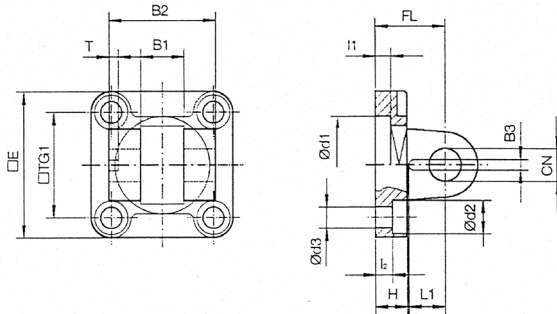


Bore (mm)	□E	B1	B2	B3	□TG1	T	L1	L3	I1	I2	FL	H	ød1	ød2	ød3	CN	XD
32	45	14	34	3.3	32.5	3	11.5	41	5	5.5	22	10	30	10.5	6.6	10	142
40	55	16	40	4.3	38	4	12	48	5	5.5	25	10	35	11	6.6	12	160
50	65	21	45	4.3	46.5	4	14	54	5	6.5	27	10	40	15	9	16	170
63	75	21	51	4.3	56.5	4	14	60	5	6.5	32	12	45	15	9	16	190
80	95	25	65	4.3	72	4	16	75	5	10	36	16	45	18	11	20	210
100	115	25	75	6.3	89	4	16	85	5	10	41	16	55	18	11	20	230

Rear Single Clevis CS

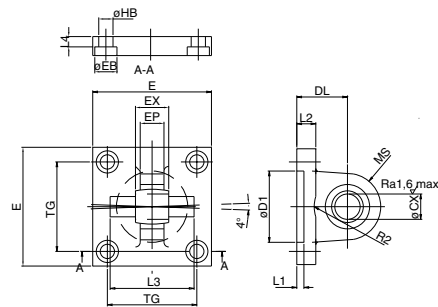


Part No.	Bore (mm)	E	TG	EX	DL	L1	L2	MS	L3	EB	HB	R2	CX	D1	L4	EP
CS5032	32	48	32.5	14	22	5	10	16	36	11	6.6	12.5	10	30	5.5	10
CS5040	40	56	38	16	25	5	10	16	42	11	6.6	14.5	12	35	5.5	11.5
CS5050	50	64	46.5	21	27	5	10	20	48	15	9	19.5	16	40	6.5	14.5
CS5063	63	75	56.5	21	32	5	12	22	55	15	9	19.5	16	45	6.5	14.5
CS5080	80	95	72	25	36	5	14	26	70	18	11	24.5	20	45	10	17.5
CS5100	100	115	89	25	41	5	16	26	80	18	11	24.5	20	55	10	17.5
CS5125	125	140	110	37	50	7.5	20	38	100	20	13.5	32.5	30	60	10	24.5

Counter pivot E

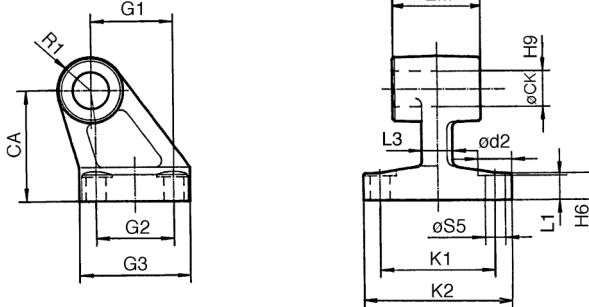

Bore (mm)	ød2	øCK	øS5	K1	K2	L3	G1	L1	G2	EM	G3	CA	H6	R1
32	11	10	6.6	38	51	10	21	7	18	26	31	32	8	10
40	11	12	6.6	41	54	10	24	9	22	28	35	36	10	11
50	15	12	9	50	65	12	33	11	30	32	45	45	12	12
63	15	16	9	52	67	14	37	11	35	40	50	50	12	15
80	18	16	11	66	86	18	47	12.5	40	50	60	63	14	15
100	18	20	11	76	96	20	55	13.5	50	60	70	71	15	19

Angled rear clevis ES

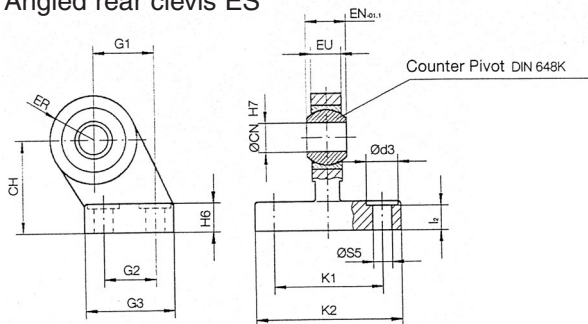


Bore (mm)	ød3	øCN	øS5	K1	K2	I2	G1	G2	G3	EN	EU	CH	H6	ER
32	11	10	6.6	38	51	8.5	21	18	31	14	10.5	32	10	15
40	11	12	6.6	41	54	8.5	24	22	35	16	12	36	10	18
50	15	16	9	50	65	10.5	33	30	45	21	15	45	12	20
63	15	16	9	52	67	10.5	37	35	50	21	15	50	12	23
80	18	20	11	66	86	11.5	47	40	60	25	18	63	14	27
100	18	20	11	76	96	12.5	55	50	70	25	18	71	15	30

Series C95

Accessories


Centre trunnion

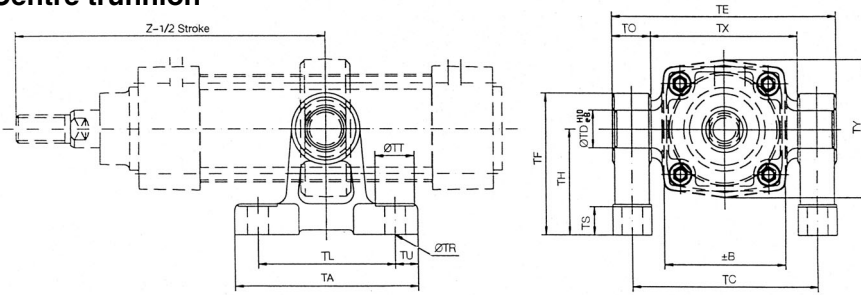

Part No.	Bore (mm)	±B	TA	TC	ØTD	TE	TF	TH	TL	TO	ØTR	TS	ØTT	TU	TX	TY	Z
C95-S03	32	46	62	62	12	74	47	35	45	12	7	10	13	8.5	50	49	95
C95-S04	40	52	80	80	16	97	60	45	60	17	9	12	17	10	63	58	106.5
	50	65	80	92	16	109	60	45	60	17	9	12	17	10	75	71	122
C95-S06	63	75	100	110	20	130	80	60	70	20	11	14	22	15	90	87	129.5
	80	95	100	130	20	150	80	60	70	20	11	14	22	15	110	110	150
C95-S10	100	114	120	158	25	184	100	75	90	26	13.5	17	24	15	132	136	160

Floating joint JA

Steel, zinc chromate plated

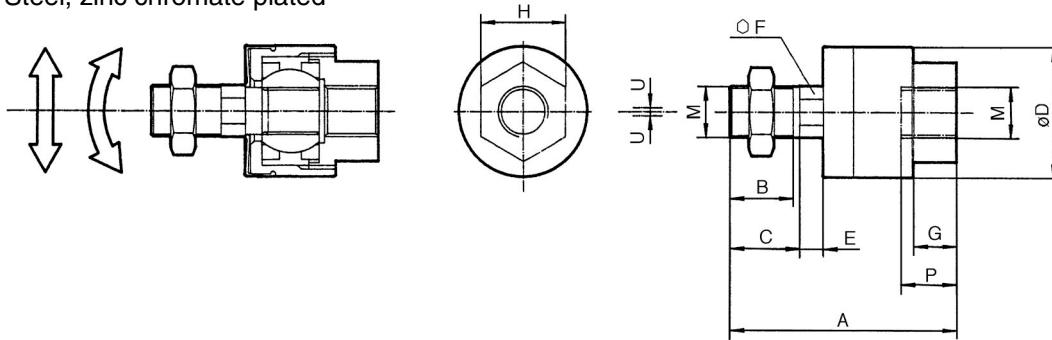


Bore (mm)	M	A	B	C	ØD	E	F	G	H	P	U	Load (kn)	Weight (g)	Radial deflection
32	M10 X 1.25	49.5	19.5	—	24	5	8	8	17	9	0.5	2.5	70	±5
40	M12 X 1.25	60	20	—	31	6	11	11	22	13	0.75	4.4	160	
50/63	M16 X 1.5	71.5	22	—	41	7.5	14	13.5	27	15	1.0	11	300	
80/100	M20 X 1.5	101	28	31	59.5	11.5	24	16	32	18	2.0	18	1080	

Piston rod clevis GKM (ISO 8140)

Steel, zinc chromate plated


Bore (mm)	e	b	d	øf	L1	c	a
32	M10 X 1.25	10	40	10	52	20	20
40	M12 X 1.25	12	48	12	62	24	24
50/63	M16 X 1.5	16	64	16	83	32	32
80/100	M20 X 1.5	20	80	20	105	40	40

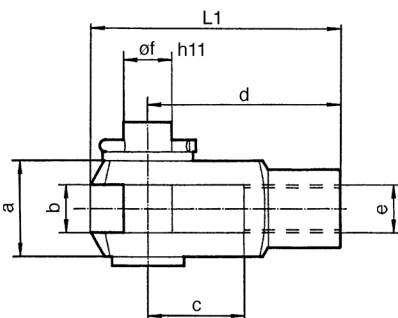

Piston rod ball joint KJ (ISO 8139)

Steel, zinc chromate plated

Bore (mm)	d3	d1	h	d6	b3	b1	L	d7	□	L3	SW
32	M10 X 1.25	10	43	28	10.5	14	20	19	13°	14	17
40	M12 X 1.25	12	50	32	12	16	22	22	13°	16	19
50/63	M16 X 1.5	16	64	42	15	21	28	27	15°	26	32
80/100	M20 X 1.5	20	77	50	18	25	33	34	15°	26	32

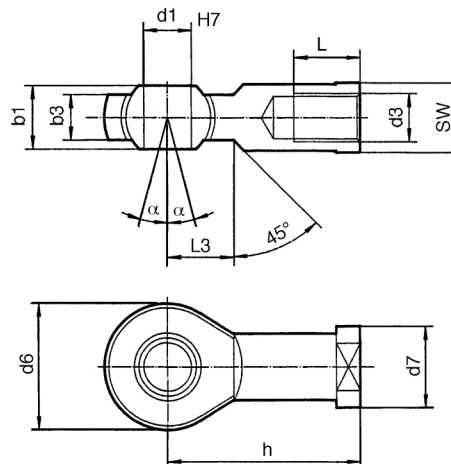

ISO Cylinder/Standard: Double Acting Series C95K

ø32, ø40, ø50, ø63, ø80, ø100

How to Order

Standard C95KD B 32 100 W A53 S

Built-in magnet

Mounting

B	Basic/without bracket
L	Axial foot
F	Front flange
G	Rear flange
C	Single rear clevis
D	Double rear clevis
T	Centre trunnion

Bore size

32	32mm
40	40mm
50	50mm
63	63mm
80	80mm
100	100mm

Auto switch

—	Without auto switch
S	1
3	3
n	n

□ Refer to table below for selection of applicable auto switch.

Number of auto switches

Auto switch

—	Without auto switch
S	1
3	3
n	n

Stroke (mm)

Refer to standard stroke table on p.6-12

Rod specifications

—	Stainless steel 1.4301 standard
W	double/through rod

Applicable Auto Switches/Tie rod mounting

Style	Special function	Electrical entry	Indicator	Load voltage			Auto switch model	Lead wire (m)			Applicable load	Mounting bracket		
				Wiring (Output)	DC	AC		0.5 (—)	3 (L)	5 (Z)				
Reed switch	—	Grommet	Yes	3 wire (Equiv. to NPN)	—	5V	—	A56	●	●	—	IC	ø32,ø40 BT-03	
					—	12V	—	A53	●	●	●	—		
					24V	5V,12V	100V,200V	A54	●	●	●	—		
						5V,12V	—	A67	●	●	—	IC		
						12V	200V or less	A64	●	●	—	IC		
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	5V,12V	—	F59	●	●	○	IC	ø50,ø63 BT-05	
					—	—	100V,200V	F5P	●	●	○	—		
						24V	12V	—	J51	●	●	○		—
					3 wire (NPN)		5V,12V	—	J59	●	●	○		—
								3 wire (PNP)	—	F59W	●	●		○
Solid state switch	Diagnosis indication (2 colour)	Grommet	Yes	3 wire (PNP)	24V	12V	—	F59W	●	●	○	IC	ø80,ø100 BT-06	
								J59W	●	●	○	—		
								F5PW	●	●	○	IC		
								J59W	●	●	○	—		
								F5BA	—	●	○	—		
Solid state switch	Water resistant (2 colour)	Grommet	Yes	2 wire	24V	12V	—	F59W	●	●	○	IC	ø80,ø100 BT-06	
								F5BA	—	●	○	—		
								F5NT	—	●	○	IC		
								F59F	●	●	○	IC		
								F5LF	●	●	○	—		

Table ①
Auto Switch Mounting Bracket for D-M9□


Bore size (mm)	Order No.
ø32, ø40	BMB5-032
ø50, ø63	BA7-040
ø80, ø100	BA7-063

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch model		Lead wire length (m) ^{Note}			Applicable load	Mounting bracket		
					DC	AC	Electrical entry direction		0.5 (Nil)	3 (L)	5 (Z)				
							Vertical	Lateral							
Reed switch	—	Grommet	Yes	3 wire	—	5V	—	Z76	●	●	—	IC circuit	ø32,ø40 BMB4-032		
				2 wire	24V	—	100V	—	Z73	●	●	●		—	Relay PLC
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	Y69A	Y59A	●	●	○	IC circuit	ø50,ø63 BMB4-050	
				3 wire (PNP)				Y7PV	Y7P	●	●	○	—		
				2 wire				Y69B	Y59B	●	●	○	—		
				3 wire (NPN)				Y7NWV	Y7NW	●	●	○	IC circuit		
				3 wire (PNP)				Y7PWV	Y7PW	●	●	○	IC circuit		
				2 wire				Y7BWV	Y7BW	●	●	○	—		
				—				Y7BA	—	●	●	○	—		
Solid state switch	—	Connector and Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	M9NV	M9N	●	●	○	IC circuit	Relay PLC	See Table ①
				3 wire (PNP)				M9PV	M9P	●	●	○			
				2 wire				M9BV	M9B	●	●	○			


□ Lead wire length 0.5m..... — (Example: A53)
3m..... L (Example: A53L)
5m..... Z (Example: A53Z)

○: Manufactured upon receipt of order.

Series C95K

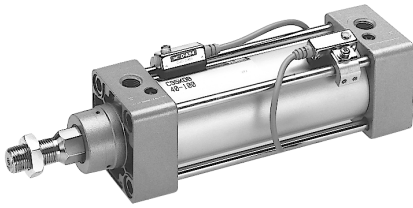

ISO Symbol
Double acting



Specifications

Bore size	ø32	ø40	ø50	ø63	ø80	ø100
Action	Double acting					
Fluid	Air					
Proof pressure	1.5MPa					
Max. operating pressure	1.0MPa					
Min. operating pressure	0.05MPa					
Ambient and fluid temperature	Without magnet -10 to 70°C (No freezing)					
	With magnet -10 to 60°C (No freezing)					
Lubrication	Not required (Non-lube)					
Operating piston speed	50 to 1000mm/s					
Allowable stroke tolerance	to 250: $^{+1.0}_0$, 251 to 1000: $^{+1.4}_0$					
Cushion	Both ends (Air cushion) ⁽¹⁾					
Thread tolerance	JIS class 2					
Port size	G1/8	G1/4	G1/4	G3/8	G3/8	G1/2
Mounting	Basic, axial direction foot, front flange, rear flange, single rear clevis, double rear clevis, centre trunnion, spherical bearing					
Non-rotating accuracy	ø32, ø40	±0.5°				
	ø50, ø63	±0.5°				
	ø80, ø100	±0.3°				
Allowable rotating torque (Nm) max.	ø32	0.25	ø80		0.79	
	ø40	0.45	ø100		0.93	
	ø50, ø63	0.64	—		—	

Note 1) Absorbable kinetic energy by cushion mechanism is identical to double acting single rod.

Minimum Strokes for Auto Switch Mounting

Refer to p.6-32 on "Minimum Strokes for Auto Switch Mounting".

Theoretical Force

OUT side is identical to double acting single rod. Refer to table below for IN side.

Bore size (mm)	Rod diameter (mm ²)	Bore size (mm)	Rod diameter (mm ²)
32	675	63	2804
40	1082	80	4568
50	1651	100	7223

Theoretical force (N) =
Pressure (MPa) X Piston area (mm²)

Standard Stroke

Bore size (mm)	Standard stroke (mm)	Max. □ stroke
32	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500	700
40	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500	800
50	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500, 600	1000
63	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500, 600	1000
80	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500, 600	1000
100	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500, 600	1000

Intermediate strokes are available.

* Please consult with SMC for longer strokes.

Weight

	Bore size (mm)	(kg)					
		32	40	50	63	80	100
Basic weight	Basic	0.56	0.84	1.39	1.91	3.22	4.24
	Axial foot	0.16	0.20	0.38	0.46	0.89	1.09
	Flange	0.20	0.23	0.47	0.58	1.30	1.81
	Single clevis	0.16	0.23	0.37	0.60	1.07	1.73
	Double clevis	0.20	0.32	0.45	0.71	1.28	2.11
	Center trunnion	0.15	0.26	0.34	0.57	1.03	1.71
Additional weight per 50 stroke	All mounting brackets	0.11	0.16	0.26	0.27	0.42	0.56
	Single rod clevis	0.15	0.23	0.26	0.26	0.60	0.83
Accessories	Double rod clevis (with pin)	0.22	0.37	0.43	0.43	0.87	1.27

Calculation example: C95KD40-100

- Basic weight 0.84 (Basic)
 - Additional weight ... 0.16/50 stroke
 - Cylinder stroke 100 stroke
 - Mounting 0.32 (Double clevis)
- 0.84+0.16 X 100/50+0.32=1.48kg

Part No: Mounting Bracket, Mounting Accessories

Description	Bore size	ø32	ø40	ø50	ø63	ø80	ø100
L	Foot ⁽¹⁾	L5032	L5040	L5050	L5063	L5080	L5100
F,G	Flange	F5032	F5040	F5050	F5063	F5080	F5100
C	Single rear clevis	C5032	C5040	C5050	C5063	C5080	C5100
D	Double rear clevis	D5032	D5040	D5050	D5063	D5080	D5100
DS	Double rear clevis (for ES accessory)	DS5032	DS5040	DS5050	DS5063	DS5080	DS5100
ES	Angled rear clevis with ball joint	ES5032	ES5040	ES5050	ES5063	ES5080	ES5100
E	Angled rear clevis	E5032	E5040	E5050	E5063	E5080	E5100
C95-S	Trunnion pivot bracket	C95-S03	C95-S04	C95-S04	C95-S06	C95-S06	C95-S10
GKM	Rod clevis	GKM10-20	GKM12-24	GKM16-32	GKM16-32	GKM20-40	GKM20-40
KJ	Piston rod ball joint	KJ10D	KJ12D	KJ16D	KJ16D	KJ20D	KJ20D
JA	Floating joint	JA30-10-125	JA40-12-125	JA50-16-150	JA50-16-150	JAH50-20-150	JAH50-20-150

Note 1) Two foot brackets required for one cylinder.

Note 2) Accessories for each mounting bracket are as follows.

Foot, Flange, Single clevis: Mounting bolts

Double rear clevis: (D,DS): Clevis pin


Note 3) C95-S: Set of 2 pcs.

Note 4) GKM according to ISO 8140

Note 5) KJ according to ISO 8139

Note 6) Piston rod nut is standard

Construction

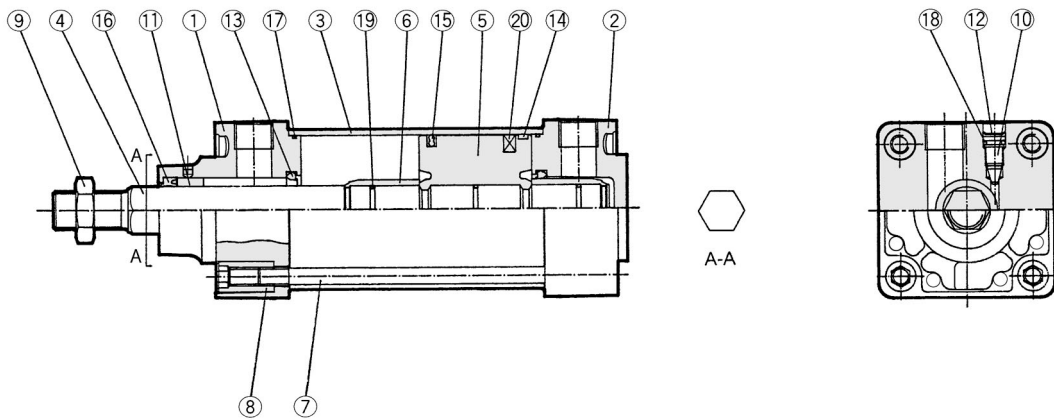

Component Parts

No.	Description	Material	Note
①	Rod cover	Aluminum die cast	
②	Head cover	Aluminum die cast	
③	Cylinder tube	Aluminum die cast	
④	Piston rod	C45 anodised steel	
⑤	Piston	Aluminum die cast	
⑥	Cushion ring	Brass	
⑦	Tie rod	Steel	(chromated)
⑧	Tie rod nut	Steel	(chromated)
⑨	Mounting nut	Steel	(chromated)
⑩	Cushion adjustment screw	Steel	(chromated)
⑪	Bushing	Bronze bush	
⑫	Serrated washer	Steel	(chromated)
⑬	Cushion seal	PUR	

No.	Description	Material	Note
⑭	Wearing	Resin	
⑮	Piston seal	NBR	
⑯	Rod seal/Gasket	NBR	
⑰	Cylinder tube gasket	NBR	
⑱	Cushion screw seal	NBR	
⑲	Piston gasket	NBR	
⑳	Magnet ring		


Seal Kits

Bore size (mm)	Kit No.	Contents
32	CK95-32	Kits include items 13 to 17.
40	CK95-40	
50	CK95-50	
63	CK95-63	
80	CK95-80	
100	CK95-100	


Series C95K

Without Mounting Bracket

C95KBø-Stroke

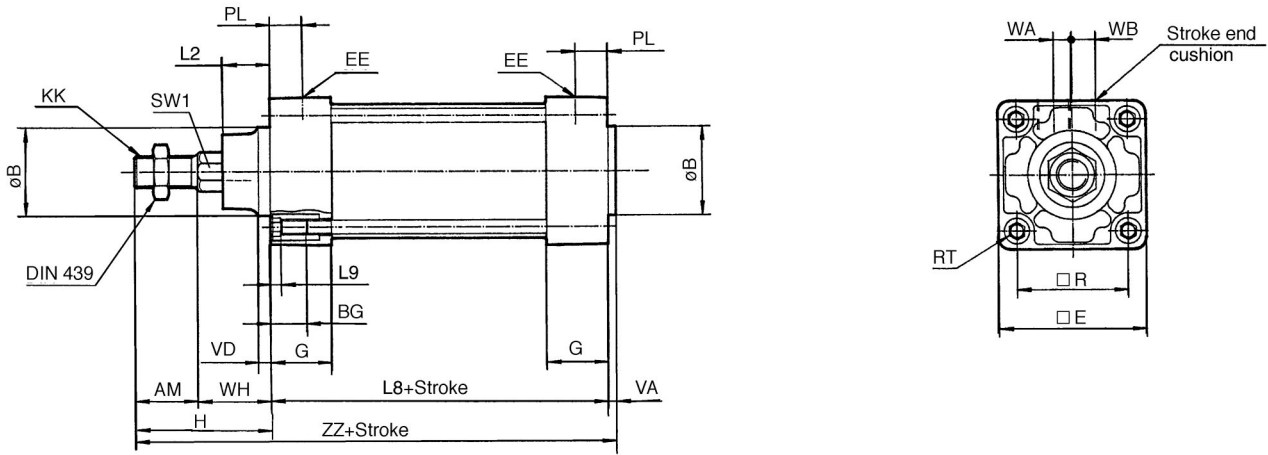

C95KBø-Stroke W

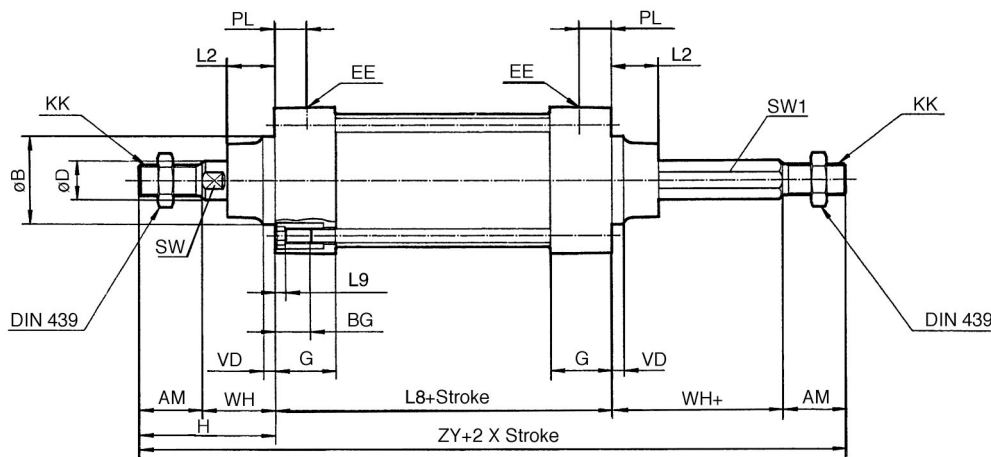

Bore size (mm)	AM	øB e11	øD	EE	PL	RT	KK	SW1	SW	G	BG	L8	VD	VA	WA	WB	WH	ZZ	ZY	□E	□R	L2	L9	H
32	22	30	12	G1/8	13	M6	M10 X 1.25	12.2	10	27	16	94	4	4	4	6.5	26	146	190	46	32.5	15	4	48
40	24	35	16	G1/4	14	M6	M12 X 1.25	14.2	13	27	16	105	4	4	4	9	30	163	213	52	38	17	4	54
50	32	40	20	G1/4	15.5	M8	M16 X 1.5	19	16	31.5	16	106	6	4	5	10.5	37	179	244	65	46.5	24	5	69
63	32	45	20	G3/8	16.5	M8	M16 X 1.5	19	16	31.5	16	121	6	4	9	12	37	194	259	75	56.5	24	5	69
80	40	45	25	G3/8	19	M10	M20 X 1.5	23	21	38	16	128	8	4	11.5	14	46	218	300	95	72	30	5	86
100	40	55	30	G1/2	19	M10	M20 X 1.5	27	21	38	16	138	8	4	17	15	51	233	320	114	89	32	5	91

□ Refer to p.6-8 through 6-10 for dimensions with mounting bracket and accessories.

ISO Cylinder/Standard: Double Acting, Low Friction

Series C95Q

ø32, ø40, ø50, ø63, ø80, ø100

How to Order

Standard C95QD B 32 100 R CA A53 S

Built-in magnet ●

Mounting ●

B	Basic/without bracket
L	Axial foot
F	Front flange
G	Rear flange
C	Single rear clevis
D	Double rear clevis
T	Centre trunnion

Bore size ●

32	32mm
40	40mm
50	50mm
63	63mm
80	80mm
100	100mm

Auto switch ●

—	Without auto switch
S	Refer to table below for selection of applicable auto switch.
3	
n	

Number of auto switches

—	2
S	1
3	3
n	n

Direction of low friction

CA	With pressure at head side
CB	With pressure at rod side

Rod specifications

—	Hard chrome as standard
R	Stainless steel piston rod
K	Stainless steel and acid-proof piston rod


Stroke (mm)
Refer to standard stroke table on p.6-16

Applicable Auto Switches/Tie rod mounting

Style	Special function	Electrical entry	Indicator	Load voltage			Auto switch model	Lead wire (m)			Applicable load	Mounting bracket			
				Wiring (Output)	DC	AC		0.5 (—)	3 (L)	5 (Z)					
Reed switch	—	Grommet	Yes	3 wire (Equiv. to NPN)	—	5V	—	A56	●	●	—	IC	ø32, ø40 BT-03		
					24V	12V	—	A53	●	●	●	—			
				2 wire	5V, 12V	100V, 200V	A54	●	●	●	—	Relay PLC			
					12V	200V or less	A67	●	●	—	IC				
Diagnosis indication (2 colour)	Yes	—	A59W	●	●	—	—	—	—	—					
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	F59	●	●	○	IC	ø50, ø63 BT-05		
								3 wire (PNP)	F5P	●	●	○		—	
				2 wire	—	100V, 200V	J51	●	●	○	—	Relay PLC			
							J59	●	●	○	—				
				3 wire (NPN)	24V	5V, 12V	F59W	●	●	○	IC	ø80, ø100 BT-06			
							3 wire (PNP)	F5PW	●	●	○			—	
				Water resistant (2 colour)	With timer	2 wire	24V	12V	—	J59W	●	●		○	—
										F5BA	—	●		○	—
				Diagnosis output (2 colour)	Latch diagnosis output (2 colour)	3 wire (NPN)	—	5V, 12V	F5NT	—	●	○		—	IC
									F59F	●	●	○		—	
4 wire (NPN)	—	F5LF	●	●	○	—	—								

Table ①
Auto Switch Mounting Bracket for D-M9

Bore size (mm)	Order No.
ø32, ø40	BMB5-032
ø50, ø63	BA7-040
ø80, ø100	BA7-063

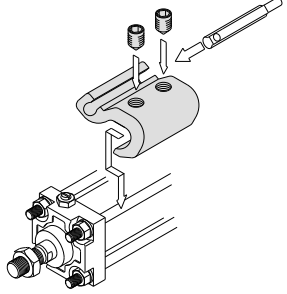

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch model		Lead wire length (m) ^(Note)			Applicable load		Mounting bracket				
					DC	AC	Electrical entry direction		0.5 (Nil)	3 (L)	5 (Z)	IC circuit	Relay PLC					
Reed switch	—	Grommet	Yes	3 wire	—	5V	—	Vertical	Z76	●	●			—	IC circuit	—		
								Lateral	Z73	●	●	●	Relay PLC					
Solid state switch	—	Grommet	Yes	2 wire	24V	5V, 12V	100V or less	Vertical	Z80	●	●	—		IC circuit	ø32, ø40 BMB4-032			
								Lateral	Z77	●	●	●						
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	Y69A	Y59A	●	●	○	IC circuit	ø50, ø63 BMB4-050				
								3 wire (PNP)	Y7PV	Y7P	●	●			○			
				2 wire	—	12V	Y69B	Y59B	●	●	○	—						
							Y7NWV	Y7NW	●	●	○							
				Diagnostic indication (2 colour indicator)	—	3 wire (NPN)	24V	5V, 12V	—	Y7PWV	Y7PW	●	●	○	IC circuit	ø80, ø100 BA4-063		
										3 wire (PNP)	Y7BWV	Y7BW	●	●			○	
				Water resistant (2 colour indicator)	—	2 wire	—	12V	Y7BA	—	●	○	—					
									Y7BA	—	●	○						
				—	—	Connector and Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	M9NV	M9N	●	●	○	IC circuit	Relay PLC
												3 wire (PNP)	M9PV	M9P	●	●		
2 wire	M9BV	M9B	●									●	○					

□ Lead wire length 0.5m..... — (Example: A53)
3m..... L (Example: A53L)
5m..... Z (Example: A53Z)

○: Manufactured upon receipt of order.




Specifications

Bore size (mm)	32	40	50	63	80	100
Action	Double acting single rod					
Direction of low friction	One direction					
Fluid	Air					
Proof pressure	1.05MPa					
Max. operating pressure	0.7MPa					
Min. operating pressure	0.01MPa					
Ambient and fluid temperature	Without auto switch: -10 to 70°C (No freezing)					
	With auto switch: -10 to 60°C (No freezing)					
Lubrication	Not required (Non-lube)					
Cushion	None					
Port size	G 1/8	G 1/4	G 1/4	G 3/8	G 3/8	G 1/2
Mounting	Basic, Foot, Front flange, Rear flange, Single clevis, Double clevis, Centre trunnion, spherical bearing					

Standard Stroke

ISO Symbol
Double acting



Bore size (mm)	Standard stroke (mm)	Max.* stroke
32	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500	700
40	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500	800
50	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500, 600	1000
63	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500, 600	1000
80	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500, 600	1000
100	25, 50, 80, 100, 125, 160, 200, 250, 320, 400, 500, 600	1000

Intermediate strokes are available.

* Please consult with SMC for longer strokes.

Part No: Mounting Bracket, Mounting Accessories

Description	Bore size	ø32	ø40	ø50	ø63	ø80	ø100
L	Foot ⁽¹⁾	L5032	L5040	L5050	L5063	L5080	L5100
F,G	Flange	F5032	F5040	F5050	F5063	F5080	F5100
C	Single rear clevis	C5032	C5040	C5050	C5063	C5080	C5100
D	Double rear clevis	D5032	D5040	D5050	D5063	D5080	D5100
DS	Double rear clevis (for ES accessory)	DS5032	DS5040	DS5050	DS5063	DS5080	DS5100
ES	Angled rear clevis with ball joint	ES5032	ES5040	ES5050	ES5063	ES5080	ES5100
E	Angled rear clevis	E5032	E5040	E5050	E5063	E5080	E5100
C95-S	Trunnion pivot bracket	C95-S03	C95-S04	C95-S04	C95-S06	C95-S06	C95-S10
GKM	Rod clevis	GKM10-20	GKM12-24	GKM16-32	GKM16-32	GKM20-40	GKM20-40
KJ	Piston rod ball joint	KJ10D	KJ12D	KJ16D	KJ16D	KJ20D	KJ20D
JA	Floating joint	JA30-10-125	JA40-12-125	JA50-16-150	JA50-16-150	JAH50-20-150	JAH50-20-150

Note 1) Two foot brackets required for one cylinder.

Note 2) Accessories for each mounting bracket are as follows.

Foot, Flange, Single clevis: Mounting bolts

Double rear clevis: (D,DS): Clevis pin

Note 3) C95-S: Set of 2 pcs.

Note 4) GKM according to ISO 8140

Note 5) KJ according to ISO 8139

Note 6) Piston rod nut is standard

Selection Guide for the Low Friction Side


- ① When used as a balancer etc., follow the example of the application mentioned earlier applying pressure at one port while leaving the other port open to atmosphere.
 - With pressure at rod cover port
..... Low friction side CB (Example of application ①)
 - With pressure at head cover port
..... Low friction side CA (Example of application ②)

In both cases, as long as the outside pressure moves the piston rod, low friction can result in the direction of extension and retraction.
- ② When used applying pressure to both ports the same time, follow the above mentioned guide and as in the following.
 - With relatively higher pressure on rod cover port
..... Use Low friction side CB
 - With relatively higher pressure on head cover port
..... Use Low friction side CA

For Dimensions, Weight, Accessories see C95S


Application Example

Low friction cylinder used in combination with precision regulator (Series IR)

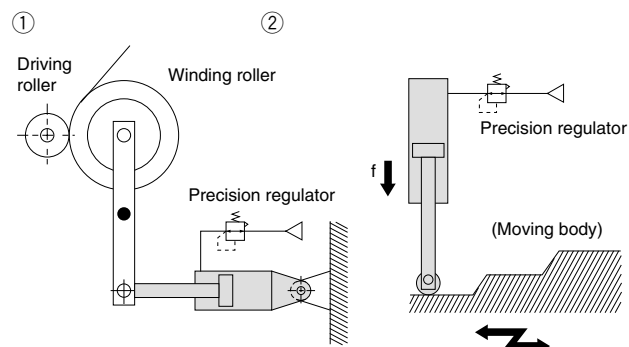

Series C95Q

Construction

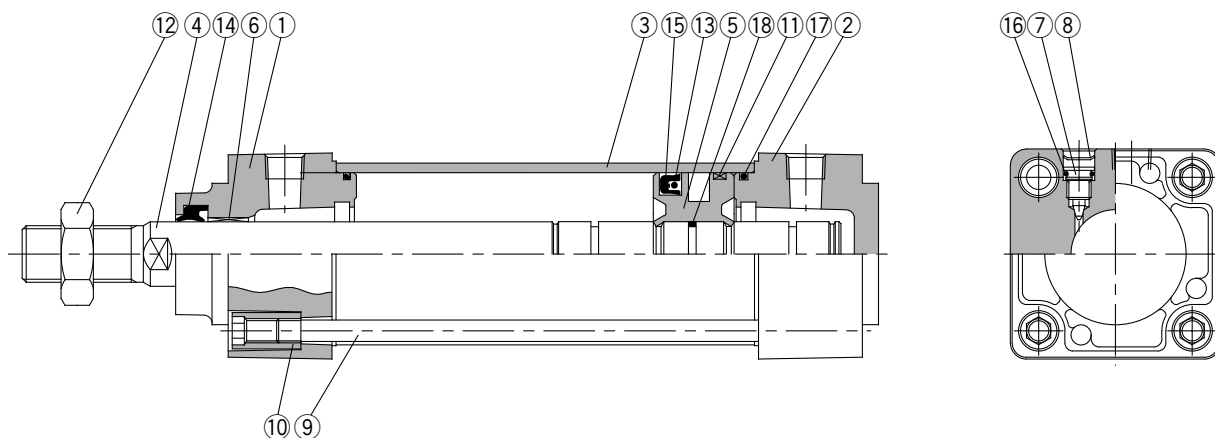

Component Parts

No.	Description	Material	Note
①	Rod cover	Aluminum die-cast	Metallic painted
②	Head cover	Aluminum die-cast	Metallic painted
③	Cylinder tube	Aluminum alloy	Hard anodized
④	Piston rod	Carbon steel	Hard chrome plated
⑤	Piston	Aluminum alloy	Chromated
⑥	Bushing	Lead bronze cast	
⑦	Cushion valve	Steel wire	Nickel plated
⑧	Snap ring	Steel for spring	ø40 to ø100
⑨	Tie rod	Carbon steel	Uni-chromated
⑩	Tie rod nut	Carbon steel	Nickel plated
⑪	Wear rod	Resin	
⑫	Rod end nut	Carbon steel	Nickel plated
⑬*	Back up O ring	NBR	
⑭*	Rod seal	NBR	
⑮*	Piston seal	NBR	
⑯	Cushion valve seal	NBR	
⑰*	Cylinder tube gasket	NBR	
⑱	Piston gasket	NBR	

Replacement Parts: Seal Kits

Bore (mm)	Kit No.	Contents
32	CQ95-32	Set of the No. ⑬, ⑭, ⑮, and ⑰.
40	CQ95-40	
50	CQ95-50	
63	CQ95-63	
80	CQ95-80	
100	CQ95-100	

ISO Cylinder/Standard: Double Acting with Positioner

Series C95P

ø50, ø63, ø80, ø100

How to Order

Standard C95PD B 50 100 A53 S

Built-in magnet ●

Mounting ●

B	Basic/without bracket
L	Axial foot
G	Rear flange
C	Single rear clevis
D	Double rear clevis

Bore size ●

50	50mm
63	63mm
80	80mm
100	100mm

Stroke (mm) ●

Refer to standard stroke table on p.6-4 maximum 300mm

Auto switch ●

—	Without auto switch
S	1
3	3
n	n

* Refer to table below for selection of applicable auto switch.

Number of auto switches


—	2
S	1
3	3
n	n

Applicable Auto Switches/Tie rod mounting

Style	Special function	Electrical entry	Indicator	Load voltage		Auto switch model	Lead wire (m)*			Applicable load	Mounting bracket		
				Wiring (Output)	DC		AC	0.5 (-)	3 (L)			5 (Z)	
Reed switch	—	Grommet	Yes	3 wire (NPN) (Equiv. to NPN)	5V	—	A56	●	●	—	IC	ø32,ø40 BT-03	
					12V	—	A53	●	●	●	Relay PLC		
				2 wire	5V,12V	100V,200V	A54	●	●	●			
					5V,12V	—	A67	●	●	—			
Solid state switch	Diagnosis indication (2 colour) Water resistant (2 colour) With timer Diagnosis output (2 colour) Latch diagnosis output (2 colour)	Grommet	Yes	3 wire (NPN)	24V	5V,12V	—	F59	●	●	○	ø50,ø63 BT-05	
								F5P	●	●	○		
				3 wire (PNP)	—	—	100V,200V	J51	●	●	○		
								J59	●	●	○		
				2 wire	24V	12V	—	F59W	●	●	○		Relay PLC
								F5PW	●	●	○		
				3 wire (NPN)	5V,12V	—	—	J59W	●	●	○		
								F5BA	—	●	○		
				3 wire (PNP)	24V	12V	—	F5NT	—	●	○		IC
								F59F	●	●	○		
				4 wire (NPN)	—	—	—	F5LF	●	●	○		

Table ①
Auto Switch Mounting Bracket for D-M9□

Bore size (mm)	Order No.
ø32, ø40	BMB5-032
ø50, ø63	BA7-040
ø80, ø100	BA7-063

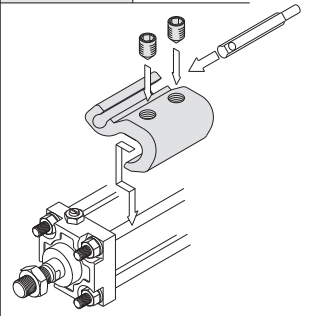

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch model		Lead wire length (m) (Note)			Applicable load	Mounting bracket	
					DC	AC	Electrical entry direction		0.5 (Nil)	3 (L)	5 (Z)			
							Vertical	Lateral						
Reed switch	—	Grommet	Yes	3 wire	—	5V	—	Z76	●	●	—	IC circuit	—	
									2 wire	—	100V			—
Solid state switch	Diagnostic indication (2 colour indicator) Water resistant (2 colour indicator)	Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	Y69A	Y59A	●	●	○	IC circuit	ø50,ø63 BMB4-050
								Y7PV	Y7P	●	●	○		
				3 wire (PNP)	—	—	100V,200V	J51	●	●	○	Relay PLC		
								J59	●	●	○			
				2 wire	24V	12V	—	F59W	●	●	○	IC circuit		
								F5PW	●	●	○			
				3 wire (NPN)	5V,12V	—	—	J59W	●	●	○	IC circuit		
								F5BA	—	●	○			
				3 wire (PNP)	24V	12V	—	F5NT	—	●	○	—		
								F59F	●	●	○			
				4 wire (NPN)	—	—	—	F5LF	●	●	○	—		

* Lead wire length 0.5m..... — (Example: A53)
3m..... L (Example: A53L)
5m..... Z (Example: A53Z)

○: Manufactured upon receipt of order.

Series C95P

Specifications

Application:

The positioner IP200 is capable of pneumatic positioning of the piston. Adjustable positions can be reached with high repeating accuracy. The piston stroke is in proportion to the air pressure input signal (0.02-0.01MPa). External forces on the position of the piston are reduced to a minimum by a special control system and an integrated function to revert the set position.

The IP200 shows excellent performance in remote control or standard control of flaps, proportioning devices, pumps, gears usw.

Specifications

- The bleed pressure acts directly onto the flapper plate. A change of the input signal will cause an instantaneous movement of the piston rod.
- easy and simple adjustment of neutral point and operation band from outside.
- Return spring is protected against accidental touches
- Positioner cylinder conforms to ISO and CETOP recommendations
- No change in dimensions with auto switch capability

Specifications

Fluid	Air 5m filtration
Supply pressure "SUP" (MPa)	0.3 ~ 0.7
Signal pressure "SIG" (MPa)	0.02 ~ 0.1
Fluid temperature (°C)	+5 to +60
Linearity	< 2%*
Hystereses	< 1%*
Repeatability	< 1%*
Sensitivity	< 1%*
Port size	G1/4
Gauge port	G1/8
Primary pressure	0.5% with 0.5MPa
Flow rate (l/min)	250 with 0.5MPa
Leakage	< 18 with 0.5MPa
Bore Size (mm)	50 to 100
Cylinder stroke (mm)	25 to 300
Standard stroke (mm)	50/100/150/200/250/300
Max. possible stroke (mm)	300

*different in % related to full span.



Part No: Mounting Bracket, Mounting Accessories

Description	ø50	ø63	ø80	ø100
L	L5050	L5063	L5080	L5100
F,G	F5050	F5063	F5080	F5100
C	C5050	C5063	C5080	C5100
D	D5050	D5063	D5080	D5100
DS	DS5050	DS5063	DS5080	DS5100
ES	ES5050	ES5063	ES5080	ES5100
E	E5050	E5063	E5080	E5100
GKM	GKM16_32	GKM16-32	GKM20-40	GKM20-40
KJ	KJ16D	KJ16D	KJ20D	KJ20D
JA	JA50-16-150	JA50-16-150	JAH50-20-150	JAH50-20-150

Note 1) Two foot brackets required for one cylinder.

Note 2) Accessories for each mounting bracket are as follows.

Foot, Flange, Single clevis: Mounting bolts

Double rear clevis: (D,DS): Clevis pin

Note 3) GKM according to ISO 8140

Note 4) KJ according to ISO 8139

Note 5) Piston rod nut is standard

Weight accessories (kg)

Ø	50	63	80	100
L	0.38	0.46	0.89	1.09
F	0.47	0.58	1.30	1.81
C	0.37	0.60	1.07	1.73
D	0.45	0.71	1.28	2.11
E	0.42	0.52	0.94	1.40

Weight Table

Weight (kg)					
Weight each	Ø	50	63	80	100
	50mm stroke	B	2.27	2.79	4.11
Weight each		0.32	0.33	0.48	0.62

Example: C95PDB50-200

Cylinder Ø50mm, stroke 200mm




Bracket L

Weight = 2.72kg + (0.31kg × $\frac{200}{50}$) = 3.96kg

For dimensions of the brackets and accessories, please see C95S, page 1-206

Dimensions

Signal Pressure/Stroke Diagram

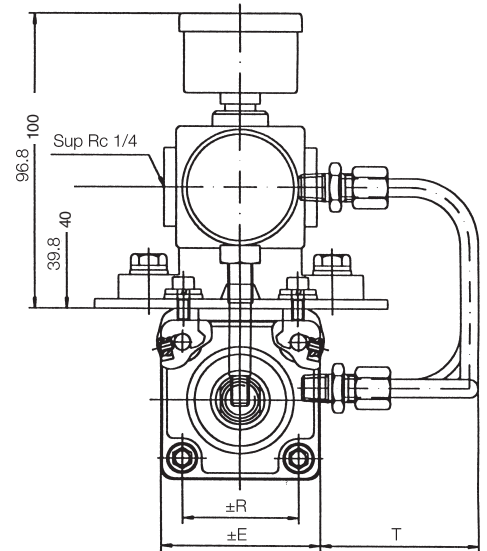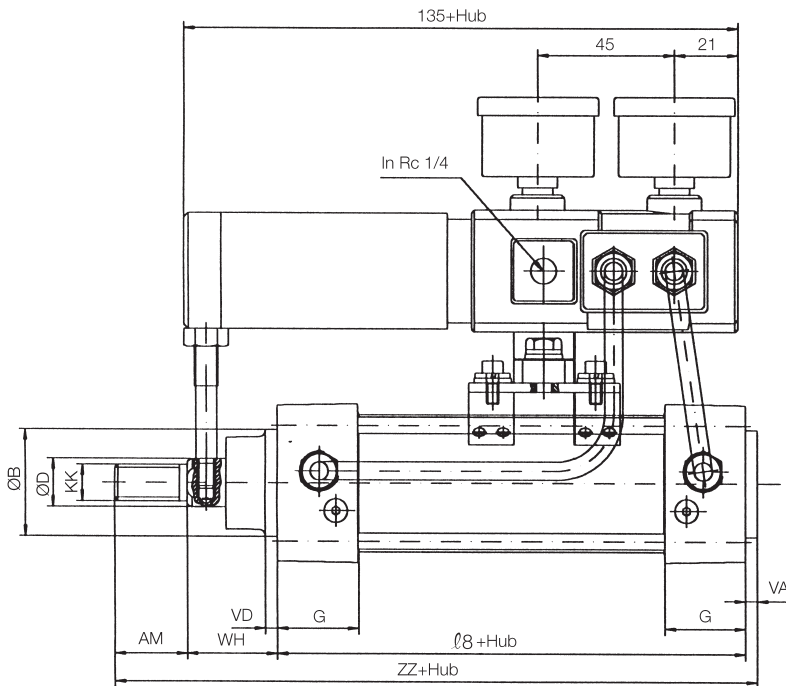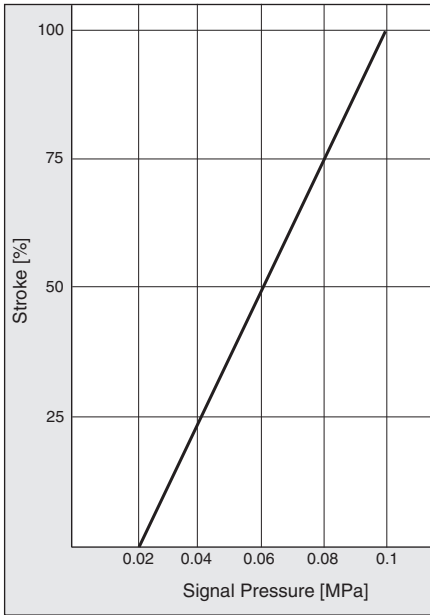

Ø	AM	ØB	ØD	±E	G	KK	l 8	±R	T	VA	VD	WH	ZZ
50	32	40	20	65	31.5	M16 x 1.5	106	46.5	53	4	6	37	179
63	32	45	20	75	31.5	M16 x 1.5	121	56.5	54	4	6	37	194
80	40	45	25	95	38	M20 x 1.5	128	72	54	4	8	46	218
100	40	55	30	114	38	M20 x 1.5	138	89	26	4	8	51	233

ISO Cylinder/Standard: Double Acting with Lock

Series C95N

ø32, ø40, ø50, ø63, ø80, ø100

How to Order

Standard C95ND B 32 100 W A53 S

Built-in magnet

Mounting

B	Basic/without bracket
L	Axial foot
G	Rear flange
C	Single rear clevis
D	Double rear clevis
T	Trunion

Bore size

32	32mm
40	40mm
50	50mm
63	63mm
80	80mm
100	100mm

Auto switch

—	Without auto switch
□	Refer to table below for selection of applicable auto switch.

Number of auto switches

—	2
S	1
3	3
n	n

Rod specifications

—	Hard chrome as standard
W	Double/through rod

Stroke (mm)
Refer to standard stroke table on p.6-23.

Applicable Auto Switches/Tie rod mounting

Style	Special function	Electrical entry	Indicator	Load voltage			Auto switch model	Lead wire (m)			Applicable load	Mounting bracket	
				Wiring (Output)	DC	AC		0.5 (-)	3 (L)	5 (Z)			
Reed switch	—	Grommet	Yes	3 wire (NPN) (Equiv. to NPN)	—	5V	—	A56	●	●	—	IC	—
					—	12V	—	A53	●	●	●		
				2 wire	24V	5V, 12V	100V, 200V	A54	●	●	●		
					—	5V, 12V	—	A67	●	●	—		
Solid state switch	—	Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	F59	●	●	○	IC	Relay PLC
				2 wire	—	12V	J59	●	●	○			
											3 wire (NPN)		
3 wire (PNP)	—	5V, 12V	F5PW	●	●	○							
							2 wire	24V	12V	—	J59W	●	●
3 wire (NPN)	—	5V, 12V	—	F5BA	—	●							
							3 wire (PNP)	—	5V, 12V	—	F5NT	—	●
2 wire	24V	12V	—	F59F	●	●							
							3 wire (NPN)	—	5V, 12V	—	F5LF	●	●
4 wire (NPN)	—	—	—	—	●	●							

Table ①
Auto Switch Mounting Bracket for D-M9□

Bore size (mm)	Order No.
ø32, ø40	BMB5-032
ø50, ø63	BA7-040
ø80, ø100	BA7-063

Type	Special function	Electrical entry	Indicator light	Wiring (output)	Load voltage		Auto switch model		Lead wire length (m) ^(Note)			Applicable load	Mounting bracket											
					DC	AC	Electrical entry direction	0.5 (Nil)	3 (L)	5 (Z)														
Reed switch	—	Grommet	Yes	3 wire	—	5V	—	—	Z76	●	●	—	IC circuit	—										
															No	2 wire	24V	5V, 12V	100V or less	—	Z73	●	●	●
3 wire (NPN)	5V, 12V	—	Y69A	Y59A	●	●	○	IC circuit	—	ø50, ø63 BMB4-050														
											3 wire (PNP)	24V	12V	—	Y7PV	Y7P	●	●	○	—	—	ø80, ø100 BA4-063		
2 wire	24V	12V	—	Y69B	Y59B	●	●	○	—	—													—	
											3 wire (NPN)	5V, 12V	—	—	Y7NWV	Y7NW	●	●	○	IC circuit	—	—		
3 wire (PNP)	5V, 12V	—	—	Y7PWV	Y7PW	●	●	○	—	—													—	
											2 wire	12V	—	—	Y7BWV	Y7BW	●	●	○	—	—	—		
—	—	—	—	Y7BA	—	●	●	○	—	—													—	
											—	Connector and Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	—	M9NV	M9N	●	●		○
3 wire (PNP)	5V, 12V	—	—	M9PV	M9P	●	●	○																
									2 wire	12V													—	

□ Lead wire length 0.5m..... — (Example: A53)
3m..... L (Example: A53L)
5m..... Z (Example: A53Z)

○: Manufactured upon receipt of order.

Cylinder Series C95N with lock


Cylinder Specifications

Bore Size [mm]	32, 40, 50, 63, 80, 100
Fluid	Air
Proof Pressure	1.5MPa
Max. operating pressure	1.0MPa
Min. operating pressure	0.08MPa
Piston speed	50 to 1000mm/s <small>(note)</small>
Ambient and fluid temperature	Without autoswitch : -10°C to 70°C (without freezing) With autoswitch : -10°C to 70°C (without freezing)
Cushion	Double air side cushion
Stroke length tolerance	to 250: $^{+1.0}_0$, 251 to 1000: $^{+1.4}_0$
Bracket type	Basic type, Axial foot type, Front flange type, Rear flange type, Single clevis type, Double clevis type

Note) Load limits exist depending upon piston speed when locked, mounting direction and operating pressure.



Cylinder with lock



Lock Specifications

Lock actuation	Spring lock (exhaust lock)
Unlocking pressure	\square 0.25MPa
Locking pressure	\square 0.20MPa
Max. operating pressure	1.0MPa
Locking direction	2 Two-way

Standard Stroke

Bore Size [mm]	Standard Stroke [mm]	Max. Stroke*
32	25,50,75,100,125,150,175,200,250,300,350,400,450,500	700
40	25,50,75,100,125,150,175,200,250,300,350,400,450,500	800
50	25,50,75,100,125,150,175,200,250,300,350,400,450,500,600	1000
63	25,50,75,100,125,150,175,200,250,300,350,400,450,500,600	
80	25,50,75,100,125,150,175,200,250,300,350,400,450,500,600,700,800	
100	25,50,75,100,125,150,175,200,250,300,350,400,450,500,600,700,800	

Intermediate strokes are available.

* Please consult with SMC for longer strokes.

Stopping Accuracy

[mm]

Locking system	Piston speed [mm/s]			
	100	300	500	1000
Spring lock	\square 0.3	\square 0.6	\square 1.0	\square 2.0

Conditions/Horizontal supply pressure P=0.5MPa

Load weight Upper limit of allowable value

Solenoid valve for locking mounted on the locking pdr

Maximum value of stopping position dispersion from 100 measurements

Spring Lock Holding Power (Maximum static Load)

Bore size [mm]	32	40	50	63	80	100
Holding power [N]	552	882	1370	2160	3430	5390

Quick Reference Guide

C55

C85

C76

CP95

C95

-X
(Made to Order)

D-
(Auto Switch)

Model Selection Procedures

Series C95N

C95N Cylinder

Part No: Mounting Bracket, Mounting Accessories

Description	Bore size	ø32	ø40	ø50	ø63	ø80	ø100
L	Foot ⁽¹⁾	L5032	L5040	L5050	L5063	L5080	L5100
F,G	Flange	FN5032	FN5040	FN5050	FN5063	F5080	F5100
C	Single rear clevis	C5032	C5040	C5050	C5063	C5080	C5100
D	Double rear clevis	D5032	D5040	D5050	D5063	D5080	D5100
DS	Double rear clevis (for ES accessory)	DS5032	DS5040	DS5050	DS5063	DS5080	DS5100
ES	Angled rear clevis with ball joint	ES5032	ES5040	ES5050	ES5063	ES5080	ES5100
E	Angled rear clevis	E5032	E5040	E5050	E5063	E5080	E5100
C95-S	Trunnion pivot bracket	C95-S03	C95-S04	C95-S04	C95-S06	C95-S06	C95-S10
GKM	Rod clevis	GKM10-20	GKM12-24	GKM16_32	GKM16-32	GKM20-40	GKM20-40
KJ	Piston rod ball joint	KJ10D	KJ12D	KJ16D	KJ16D	KJ20D	KJ20D
JA	Floating joint	JA30-10-125	JA40-12-125	JA50-16-150	JA50-16-150	JAH50-20-150	JAH50-20-150

- Note 1) Two foot brackets required for one cylinder.
 Note 2) Accessories for each mounting bracket are as follows:Foot, Flange, Single clevis: Mounting bolts
 Double rear clevis: (D,DS): Clevis pin
 Note 3) C95-S: Set of 2 pcs.
 Note 4) GKM according to ISO 8140
 Note 5) KJ according to ISO 8139
 Note 6) Piston rod nut is standard


Single Rod Weight Table

Bore Size [mm]		32	40	50	63	80	100
Basic weight	Basic type B	1.40	2.15	3.53	5.18	8.99	12.72
	Trunnion T	0.15	0.26	0.34	0.57	1.03	1.71
Additional weight per 50mm of stroke	All mounting brackets	0.11	0.16	0.26	0.27	0.42	0.56

(Example) C95NDB32-100 (Standard, Ø32, 100er)
 •Basic weight..... 1.40 (basic type, Ø32)
 •Additional weight 0.11/50mm stroke
 •Cylinder stroke 100mm stroke
 $1.40 + 0.11 \times 100/50 = 3.02\text{kg}$

Manual override for unlocking

In case the air supply is cut off or discharged, unlocking can be performed with a commercially available tool. The fail safe mechanism locks again when manual override is released.

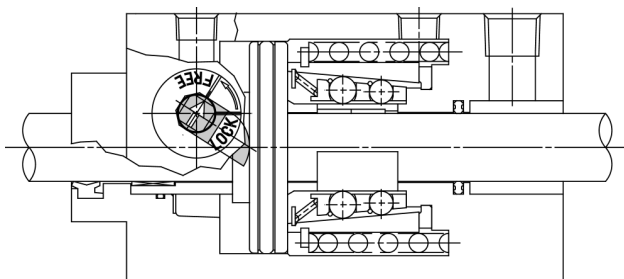

Weight accessories [kg]


Ø	32	40	50	63	80	100
L	0.16	0.20	0.38	0.46	0.89	1.09
F	0.20	0.23	0.47	0.58	1.30	1.81
C	0.16	0.23	0.37	0.60	1.07	1.73
D	0.20	0.32	0.45	0.71	1.28	2.11

Example:


Cylinder Ø40 mm, Stroke 100 mm, bracket D

$$\text{Weight} = 0.84 \text{ kg} + (0.16 \text{ kg} \times \frac{100}{50}) + 0.32 \text{ kg} = 1.48 \text{ kg}$$

Construction Principles

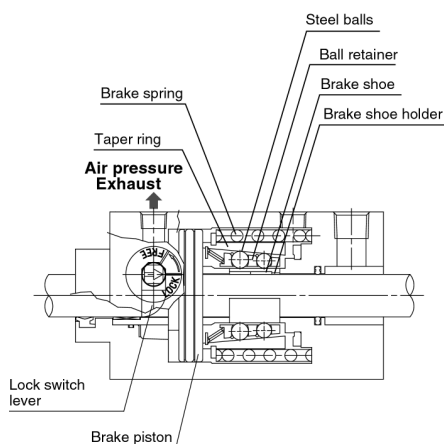

Locked condition

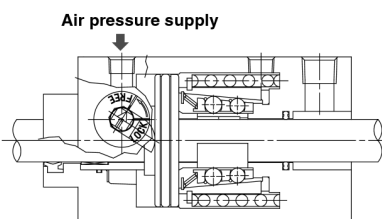


Unlocked condition

Spring lock (exhaust lock)

The spring force which acts upon the taper ring is magnified by a wedge effect, and is conveyed to all of the numerous steel balls which are arranged in two circles. These act on the brake shoe holder and brake, which locks the piston rod by tightening against it with a large force.

Unlocking is accomplished when air pressure is supplied to the unlocking port. The brake piston and taper ring oppose the spring force, moving to the right side, and the ball retainer strikes the cover section A. The braking force is released as the steel balls are removed from the taper ring by the ball retainer.

Construction

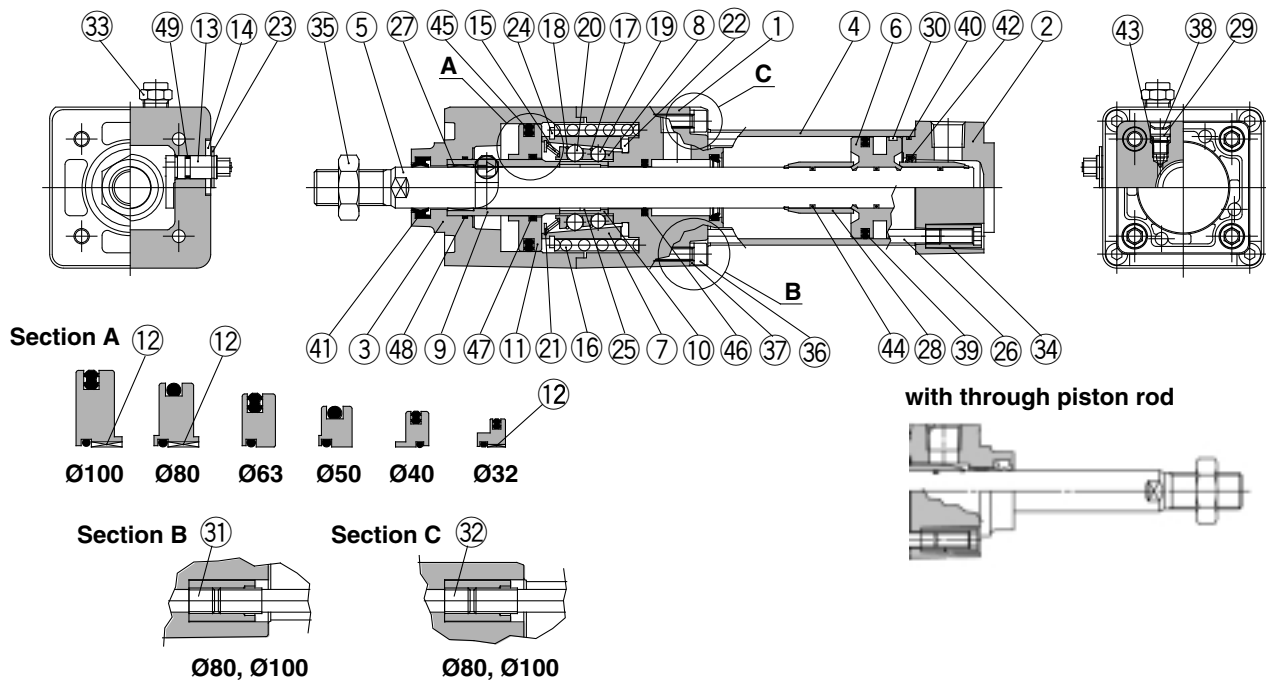

Parts list

No.	Description	Material	Note
①	Rod cover	Aluminium alloy	Hard anodised & metallic coated
②	Head cover	Aluminium alloy	Chromated & metallic coated
③	Cover	Aluminium alloy	Hard anodised & metallic coated
④	Cylinder tubing	Aluminium alloy	Hard anodised
⑤	Piston rod	Carbon steel	Hard chrome plated
⑥	Piston	Aluminium alloy	Chromated
⑦	Taper Ring	Carbon steel	Heat treated
⑧	Ball retainer	Special resin	
⑨	Piston guide	Carbon steel	Zinc chromated
⑩	Brake shoe holder	Carbon steel	Heat treated
⑪	Release piston	Ø40	Aluminium alloy Hard anodised
		Ø50	
		Ø63	
		Ø32	Carbon steel Zinc chromated
		Ø80	
⑫	Release piston bushing	Steel + special resin	Ø32, Ø80, Ø100 only
⑬	Unlocking cam	Carbon steel	Glossy chromated
⑭	Washer	Carbon steel	Black zinc chromated
⑮	Retainer pre-load spring	Carbon steel	Zinc chromated
⑯	Brake spring	Carbon steel	Zinc chromated
⑰	Clip A	Stainless steel	
⑱	Clip B	Stainless steel	
⑲	Steel ball A	Carbon steel	
⑳	Steel ball B	Carbon steel	
㉑	Tooth ring	Stainless steel	
㉒	Damper	Polyurethane rubber	
㉓	C type retaining ring for unlocking cam shaft	Carbon steel	
㉔	C type retaining ring for taper ring	Carbon steel	
㉕	Brake shoe	Special friction material	
㉖	Tie rod	Carbon steel	Chromated
㉗	Bushing	Lead-bronze casting	
㉘	Cushion ring	Brass	


Parts list

No.	Description	Material	Note
㉙	Cushion valve	Carbon steel	Nickel plated
㉚	Wear ring	PUR	
㉛	Unit holding tie-rod A	Carbon steel	Chromated Ø80, Ø100 only
㉜	Unit holding tie-rod B	Carbon steel	Chromated Ø80, Ø100 only
㉝	BC element		
㉞	Tie-rod nut	Carbon steel	Nickel plated
㉟	Rod end nut	Carbon steel	Nickel plated
㊱	Hexagon socket head cap screw	Carbon steel	Nickel plated Ø32, Ø63 only
㊲	Spring washer for hex. socket head cap screw	Carbon steel	Nickel plated Ø32, Ø63 only
㊳	Retaining ring	Carbon steel	
㊴	Piston seal	NBR	
㊵	Cylinder tube gasket	NBR	
㊶	Rod seal A	NBR	
㊷	Cushion seal	NBR	
㊸	Cushion valve seal	NBR	
㊹	Piston gasket	NBR	
㊺	Release piston gasket	NBR	
㊻	Rod seal B	NBR	
㊼	Release piston gasket	NBR	
㊽	Piston guide gasket	NBR	
㊾	Unlocking cam gasket	NBR	

Series C95N

Dimensions

Basic type (B)

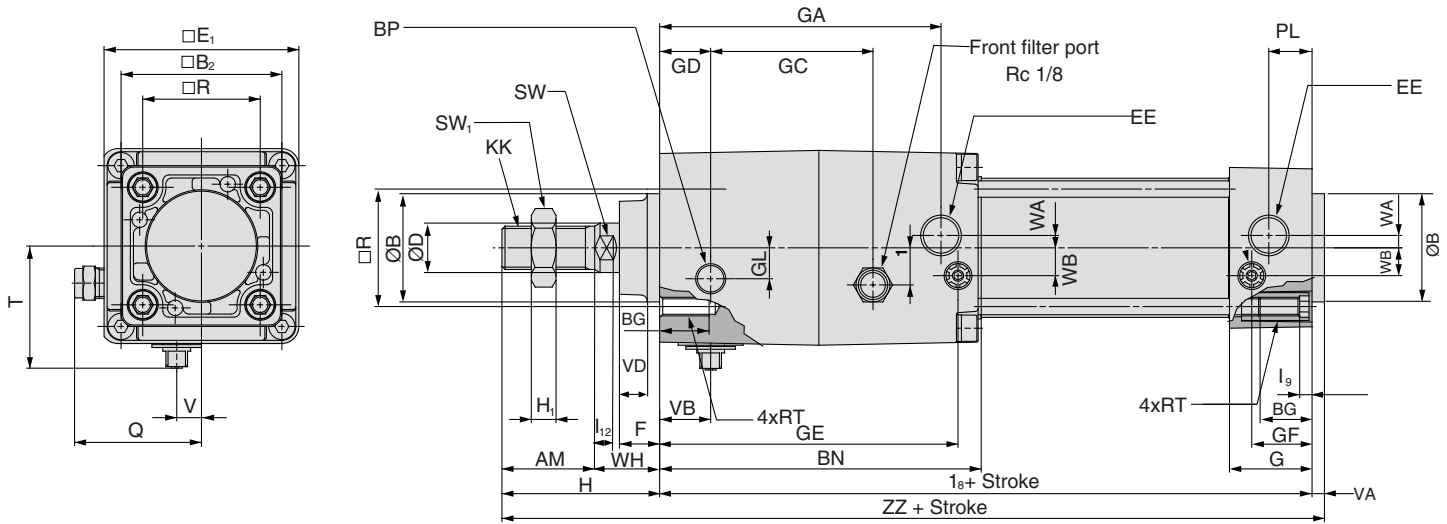


Bore size (mm)	AM	∅Be 11	□B ₂	BG	BN	BP	∅D	EE	□E	□E ₁	F	G	GA	GC	GD	GE	GF	GL	GL ₁	H	H ₁
32	22	30	46	16	97	G1/8	12	G1/8	46	54	13	27	83	45.5	13	88.5	18.3	7.5	12	48	6
40	24	35	52	16	104	G1/8	16	G1/4	52	63	13	27	91	52.5	16.5	96.5	19.5	10	12	54	8
50	32	40	65	16	120.5	G1/4	20	G1/4	65	75	14	31.5	104.5	58.5	19	111.2	22.4	11.5	15	69	11
63	32	45	75	16	134.5	G1/4	20	G3/8	75	90	14	31.5	119.5	68	23	123.5	20.7	17.5	12	69	11
80	40	45	95	16	169	G1/4	25	G3/8	95	102	20	38	150	81	33	157	26	22	18	86	13
100	40	55	114	16	189	G1/4	30	G1/2	114	116	20	38	170	96	37.5	177	26	25	20	91	16

Bore size (mm)	KK	I ₈	I ₉	I ₁₂	PL	Q	□R	RT	SW	SW ₁	T	V	VA	VB	VD	WA	WB	WH	ZZ
32	M10 x 1.25	164	4	6	13	37	32.5	M6	10	17	34	6.5	4	13	4	4	6.5	26	216
40	M12 x 1.25	182	4	6.5	14	41.5	38	M6	13	19	39.5	8	4	16.5	4	4	9	30	240
50	M16 x 1.5	195	5	8	15.5	47.5	46.5	M8	16	24	47	9	4	20	6	5	10.5	37	268
63	M16 x 1.5	224	5	8	16.5	55	56.5	M8	16	24	55.5	8.5	4	23	6	9	12	37	297
80	M20 x 1.5	259	5	10	19	61	72	M10	21	30	61.5	10.5	4	33	8	11.5	14	46	349
100	M20 x 1.5	289	5	10	19	68	89	M10	21	30	69.5	10.5	4	37.5	8	17	15	51	384

Dimensions

Double Rod (Option W)

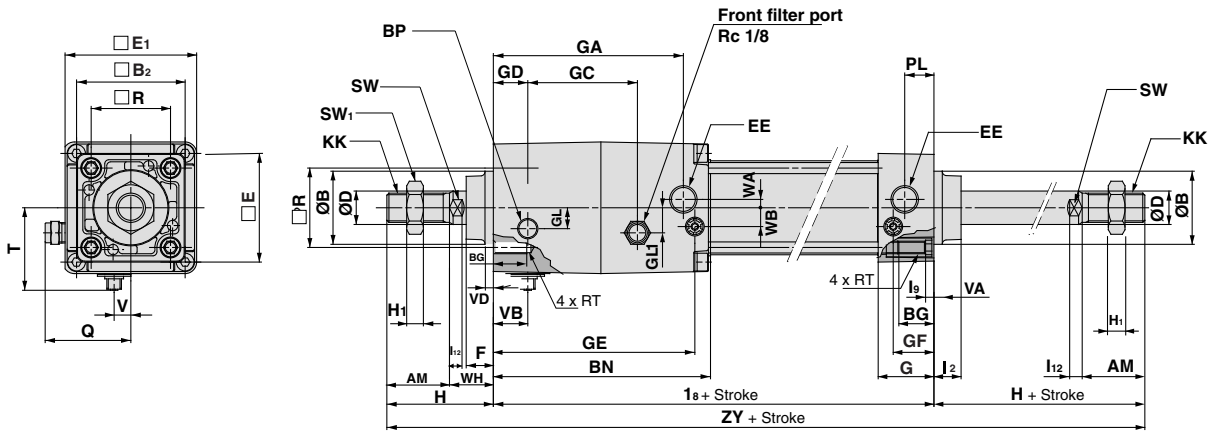


Bore size (mm)	AM	ØBe 11	□B ₂	BG	BN	BP	ØD	EE	□E	□E ₁	F	G	GA	GC	GD	GE	GF	GL	GL ₁	H	H ₁
32	22	30	46	16	97	G1/8	12	G1/8	46	54	13	27	83	45.5	13	88.5	18.3	7.5	12	48	6
40	24	35	52	16	104	G1/8	16	G1/4	52	63	13	27	91	52.5	16.5	96.5	19.5	10	12	54	8
50	32	40	65	16	120.5	G1/4	20	G1/4	65	75	14	31.5	104.5	58.5	19	111.2	22.4	11.5	15	69	11
63	32	45	75	16	134.5	G1/4	20	G3/8	75	90	14	31.5	119.5	68	23	123.5	20.7	17.5	12	69	11
80	40	45	95	16	169	G1/4	25	G3/8	95	102	20	38	150	81	33	157	26	22	18	86	13
100	40	55	114	16	189	G1/4	30	G1/2	114	116	20	38	170	96	37.5	177	26	25	20	91	16



Bore size (mm)	KK	I ₂	I ₈	I ₉	I ₁₂	PL	Q	□R	RT	SW	SW ₁	T	V	VA	VB	VD	WA	WB	WH	ZY
32	M10 x 1.25	15	164	4	6	13	37	32.5	M6	10	17	34	6.5	4	13	4	4	6.5	26	260
40	M12 x 1.25	17	182	4	6.5	14	41.5	38	M6	13	19	39.5	8	4	16.5	4	4	9	30	290
50	M16 x 1.5	24	195	5	8	15.5	47.5	46.5	M8	16	24	47	9	4	20	6	5	10.5	37	333
63	M16 x 1.5	24	224	5	8	16.5	55	56.5	M8	16	24	55.5	8.5	4	23	6	9	12	37	362
80	M20 x 1.5	30	259	5	10	19	61	72	M10	21	30	61.5	10.5	4	33	8	11.5	14	46	431
100	M20 x 1.5	32	289	5	10	19	68	89	M10	21	30	69.5	10.5	4	37.5	8	17	15	51	471

Series C95N



Dimensions Brackets on Cylinder




Axial Foot Type

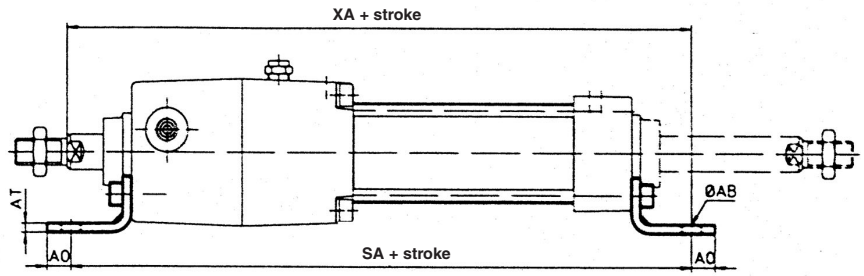


Trunion Type

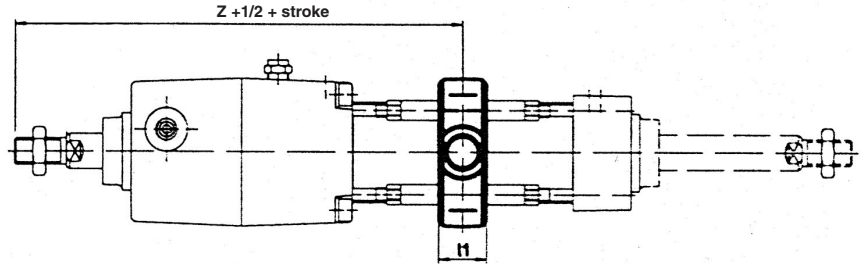

Rear Flange Type



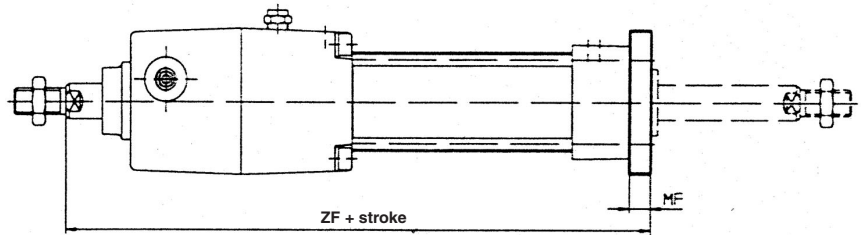


Front Flange Type

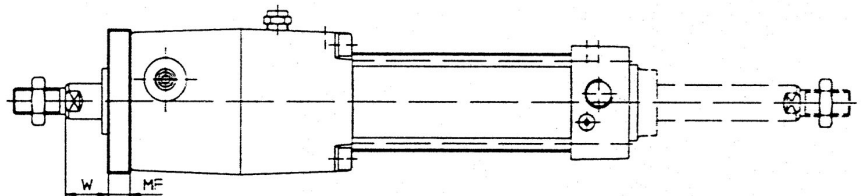

Single Clevis Type

Double Clevis Type

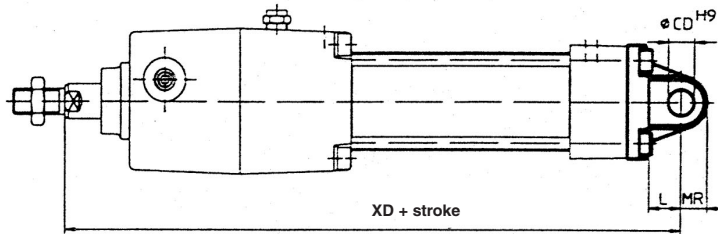

Bore size (mm)	Ø AB	AH	AD	AT	CB ₁	ØCD H9	E1	E2	EB	EW ₂	ØFB	L	LY	MF	MR	R	SA	ØTD e9	TF	TL	TM
32	7	32	10	4	26	10	48	56	65	26	7	12	59	10	9.5	38	212	12	72	12	50
40	9	36	11	4	28	12	55	65	75	28	9	15	67.5	10	12	46	238	16	83	16	63
50	9	45	12	5	32	12	68	77	80	32	9	15	82.5	12	12	52	259	16	100	16	75
63	9	50	12	5	40	16	80	92	90	40	9	20	95	12	16	62	288	20	115	20	90
80	12	63	14	6	50	16	100	100	110	50	12	20	114	16	16	63	341	20	126	20	110
100	14	71	16	6	60	20	120	120	140	60	14	25	129	16	20	75	371	25	150	25	132

1) +0.03/+0.1 2) -0.2/-0.6

Bore size (mm)	TR	UB	UF	UW	W	XA	XD	Z	ZF	I1
32	32	45	87	49	16	214	212	165	200	18
40	36	52	101	58	20	240	237	183.5	222	22
50	45	60	120	71	25	264	259	211	244	24
63	50	70	135	87	25	293	293	232.5	273	28
80	63	90	153	110	30	346	341	281	321	34
100	75	110	178	136	35	381	381	311	356	40




Series C95N Specific Product Precaution

Air Pressure Circuits

Warning

1. Basic Circuits


1. [Horizontal]

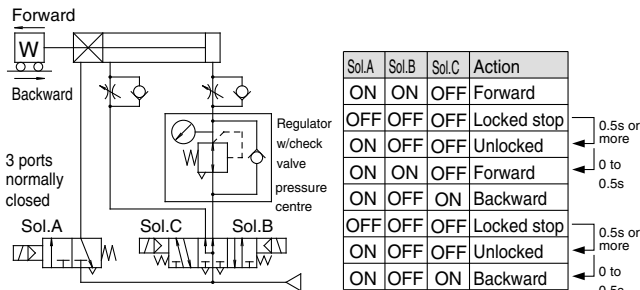

2. [Vertical]


[Load in direction of rod extension]

[Load in direction of rod retraction]

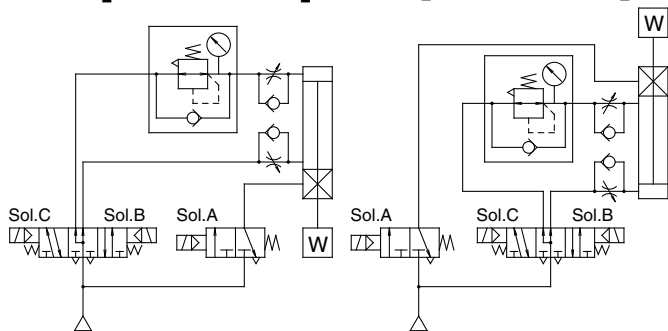


Caution

- A 3 position pressure centre solenoid valve and regulator with check valve can be replaced with two 3 port normally open valves and a regulator with relief function.

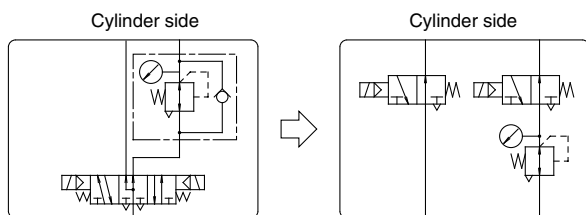

[Example]

1. [Horizontal]

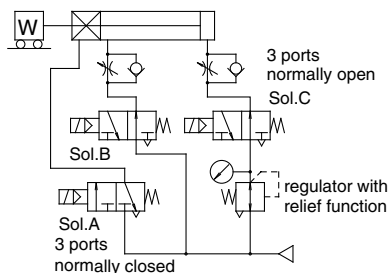


Air Pressure Circuits

Caution

2. [Vertical]

[load in direction of rod extension]


[Load in direction of rod retraction]

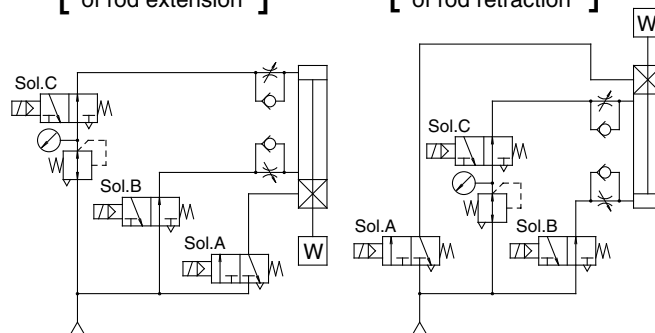

Manual Unlocking

Caution

- The unlocking cam provided on the C95N Series is an emergency unlocking mechanism only. During an emergency when the air supply is cut off, it is used to alleviate a problem by forcibly pushing the release piston back to release the lock. However, take note that the sliding resistance of the piston rod will be high compared to unlocking with air pressure.
- When installing into equipment or machinery, etc., in cases where it will be necessary to hold an unlocked condition for an extended time, air pressure of 0.25MPa or more should be applied to the unlocking port.
- Do not turn the unlocking cam (the arrow on the unlocking cam head) past the FREE position. If it is turned too far there is a danger of damaging the unlocking cam.

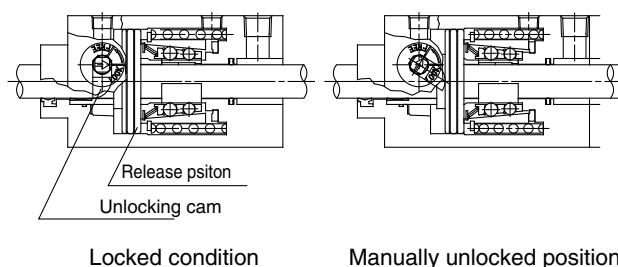


[Principle]

If the unlocking cam is turned counter clockwise with a tool such as an adjustable angle wrench, the release piston is pushed back and the lock is released. Since the lever will return to its original position when released and become locked again, it should be held in this position for as long as unlocking is needed.

Precautions on Model Selection

⚠ Caution

Example

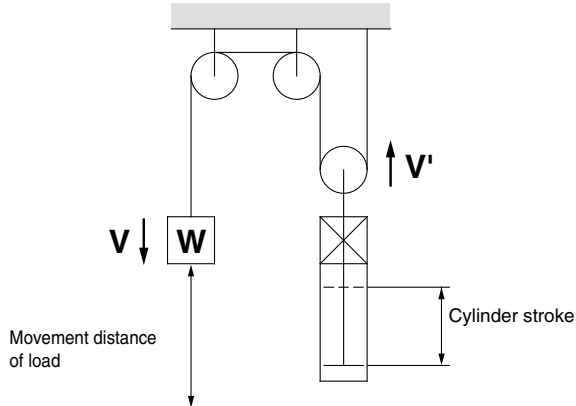

Selection Example


- **Load weight:** $m=50\text{kg}$
- **Movement distance:** Stroke=500mm
- **Movement time:** $t=2\text{s}$
- **Load condition:** Vertical downward=Load in direction of rod extension
- **Operating pressure:** $P=0.4\text{MPa}$

Step 1: From graph 1 find the maximum movement speed of the load
 □ Maximum speed V : approx 350mm/s

Step 2: Select graph 6 based upon the load condition and operating pressure, and then from the intersection of the maximum speed $V=350\text{mm/s}$ found in step 1, and the load weight $m=50\text{kg}$
 □ $\text{Ø}63$ □selecta C95NDB63 or larger bore size.

Step 1 Find the maximum load speed: V

Graph 1

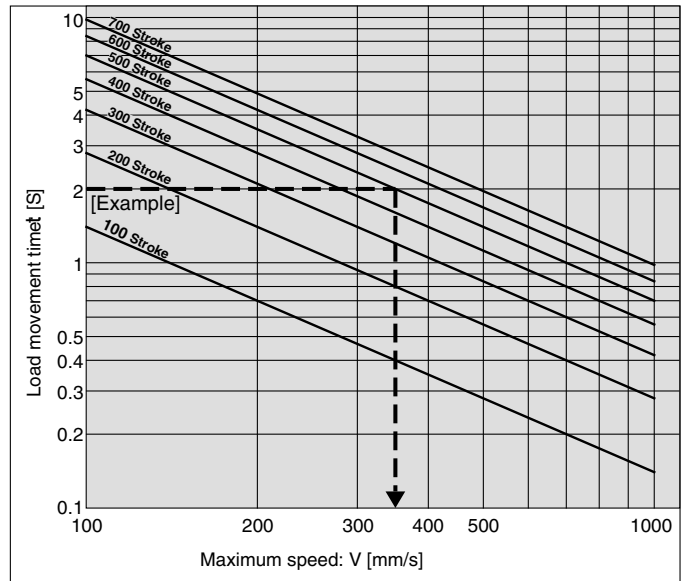


Step 2 Find the cylinder bore size


Load condition

Operating pressure

Direction of load at right angle to rod
 (□ ° Being held by a guide)

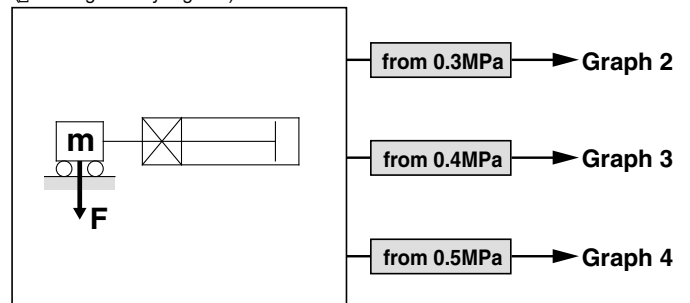


Load in direction of rod extension
 Load in direction of rod retraction

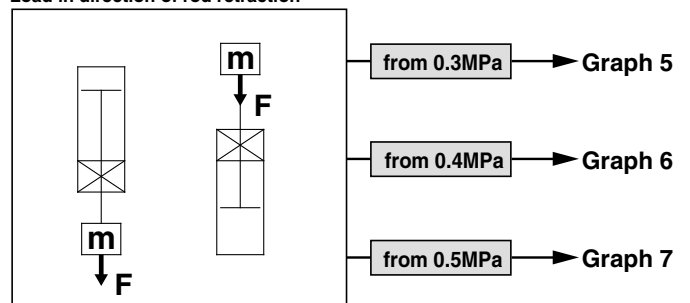

Selection Graphs


Graph 2

$0.3\text{MPa} \leq P < 0.4\text{MPa}$

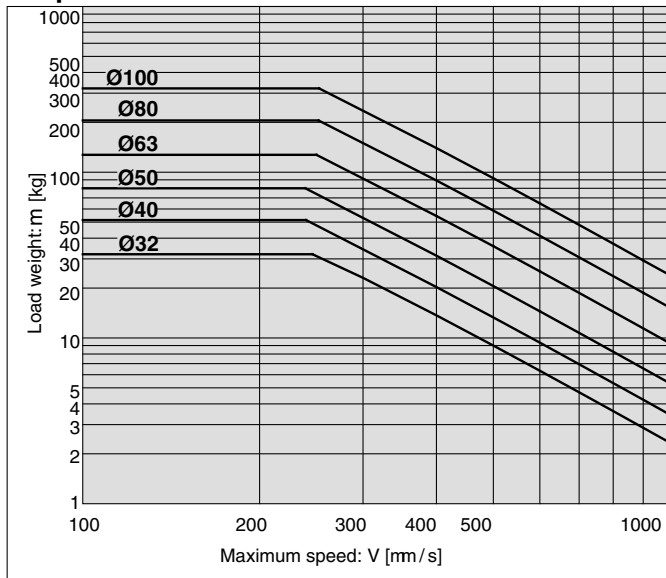


Graph 5

$0.3\text{MPa} \leq P < 0.4\text{MPa}$

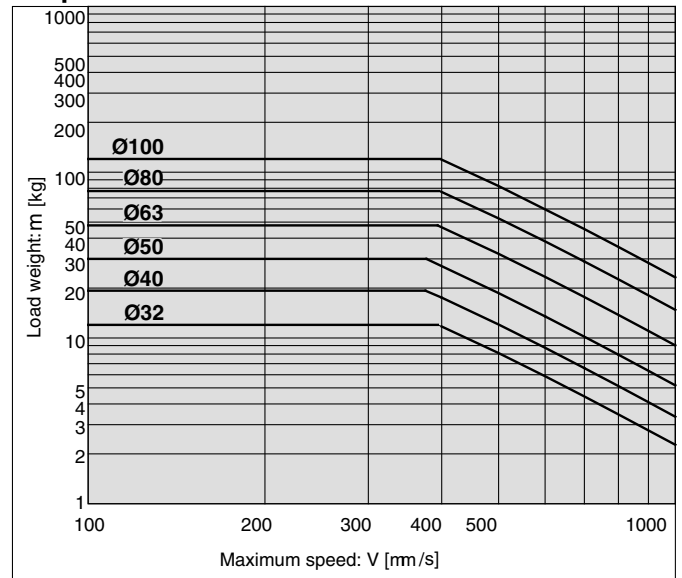


Graph 3

$0.4\text{MPa} \leq P < 0.5\text{MPa}$

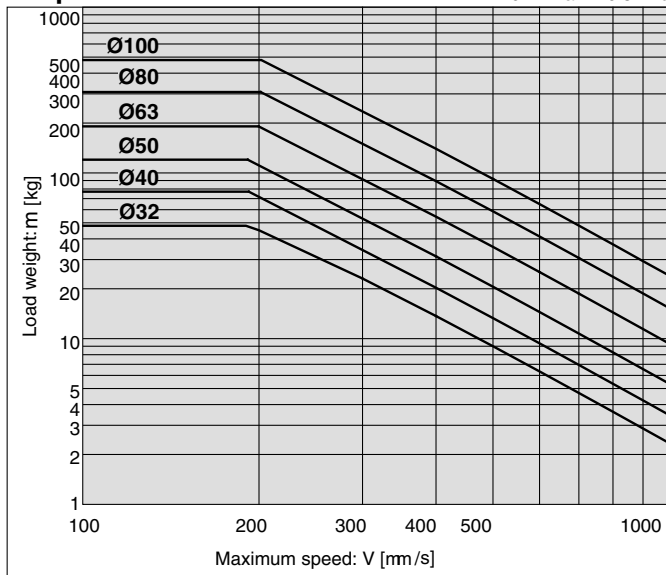


Graph 6

$0.4\text{MPa} \leq P < 0.5\text{MPa}$

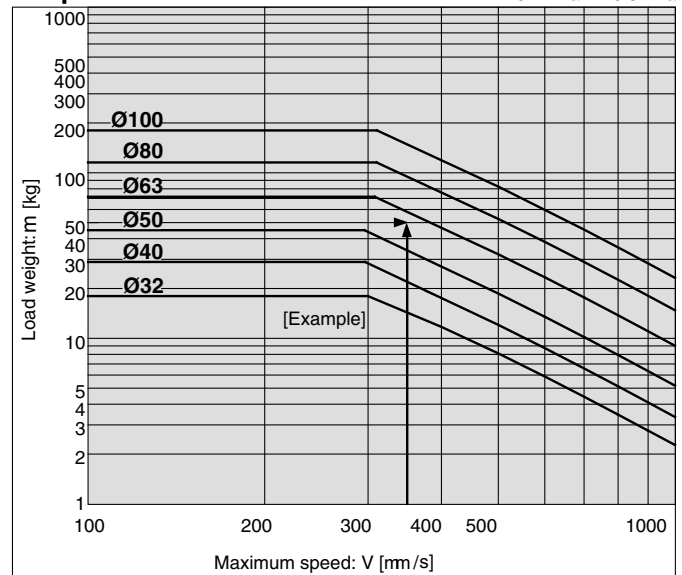


Graph 4

$0.5\text{MPa} \leq P$

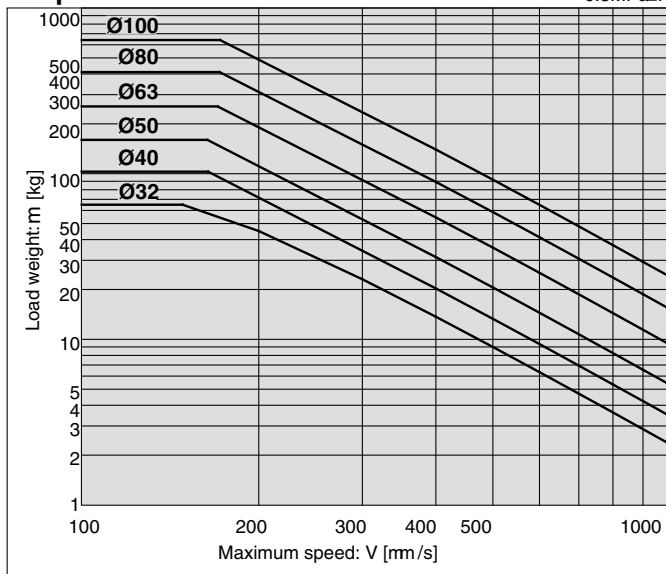

Graph 7

$0.5\text{MPa} \leq P$

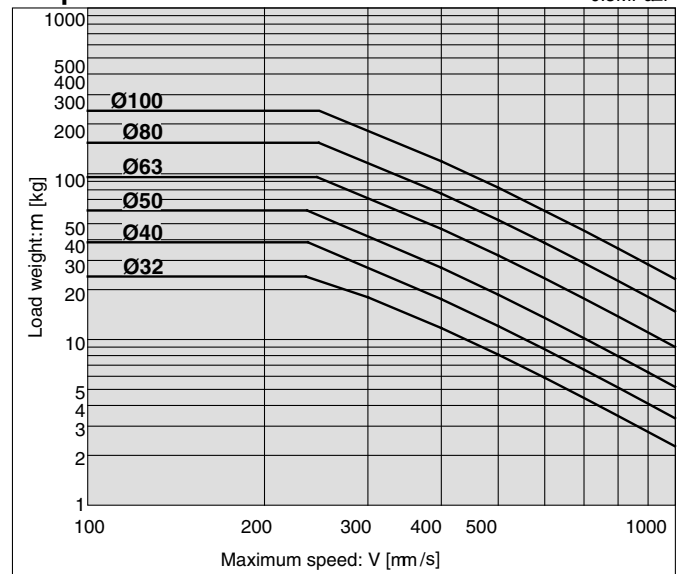

Quick Reference Guide

C55

C85

C76

CP95

C95

-X (Merge to Order)


D- (Auto Switch)

Model Selection Procedures

ISO/VDMA Cylinder: Large Bore Size Type Double Acting, Single Rod Series C95

ø160, ø200, ø250

How to Order

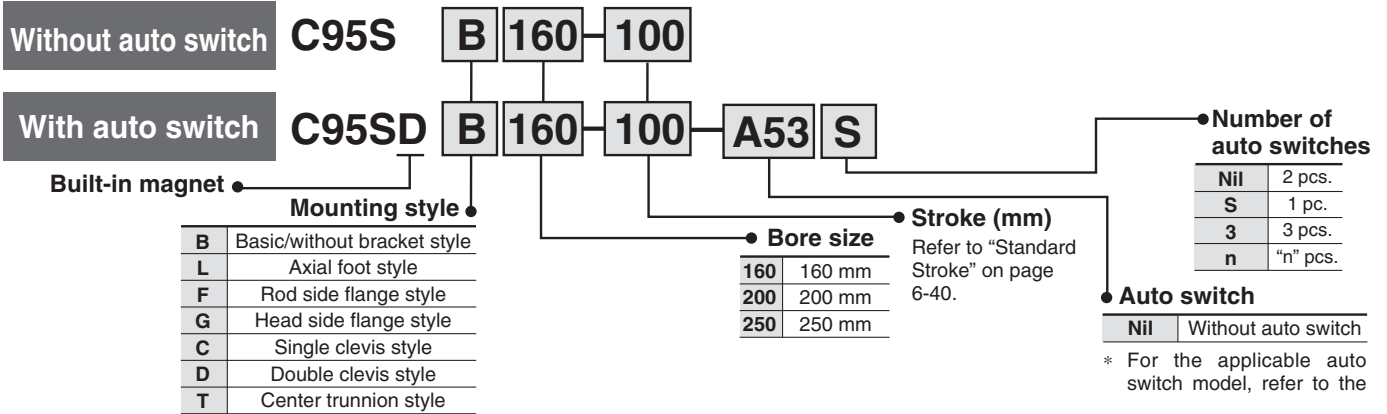

Applicable Auto Switch/Tie-rod Mounting

Type	Special function	Electrical entry	Indicator light	Wiring (Output)	Load voltage		Auto switch model		Lead wire length (m)			Applicable load					
					DC	AC	Tie-rod mounting	Band mounting	0.5 (Nil)	3 (L)	5 (Z)						
Reed switch	—	Grommet	Yes	3-wire (Equiv. to NPN)	24 V	5 V	—	A56	—	●	●	—	IC	—			
				2-wire		12 V	—	A53	—	●	●	●	—	Relay, PLC			
						5 V, 12 V	100 V, 200 V	A54	—	●	●	●	—				
						12 V	200 V or less	A67	—	●	●	—	IC				
						—	—	A64	—	●	●	—	—				
	Diagnostic indication (2-color)	Terminal conduit	No	3-wire	5 V	—	A59W	—	●	●	—	IC	— (Note)				
	—			12 V	AC 100	Z76	—	●	●	—	—	Relay, PLC (Note)					
				5 V, 12 V	100 V or less	Z80	—	●	●	—	IC						
				2-wire	12 V	—	A33	—	—	—	—		—	PLC (Note)			
					100 V, 200 V	—	A34	—	—	—	—		—	Relay, PLC (Note)			
DIN terminal	Yes	—	—	—	—	—	—	—	—	—	—	—	—				
														—	—	—	—
Solid state switch	—	Grommet	Yes	3-wire (NPN)	24 V	5 V, 12 V	—	F59	—	●	●	○	IC				
				3-wire (PNP)				F5P	—	●	●	○	—				
				2-wire				12 V	J51	—	●	●	○	—			
									J59	—	●	●	○	—			
				Diagnostic indication (2-color)				3-wire (NPN)	5 V, 12 V	—	F59W	—	●	●	○	IC	
											F5PW	—	●	●	○	—	
				Water resistant (2-color)				2-wire	12 V	—	J59W	—	●	●	○	—	
											F5BAL	—	—	●	○	—	
				With timer				3-wire (NPN)	5 V, 12 V	—	F5NTL	—	—	●	○	IC	
											F59F	—	●	●	○	—	
	Diagnostic output (2-color)	3-wire (NPN)	5 V, 12 V	—	Y59A	—	●	●	○	IC							
					Y59B	—	●	●	○	—							
	—	Terminal conduit	—	—	3-wire (PNP)	24 V	5 V, 12 V	—	Y7P	—	●	●	○	—	Relay, PLC (Note)		
					3-wire (NPN)				Y7NW	—	●	●	○	IC			
					3-wire (PNP)				Y7PW	—	●	●	○	—			
					2-wire				Y7BW	—	●	●	○	—			
	Diagnostic indication (2-color)	—	—	—	2-wire	24 V	12 V	—	Y7BAL	—	—	●	○	—			
					3-wire (NPN)				—	—	—	—	IC				
	Water resistant (2-color)	—	—	—	2-wire	24 V	12 V	—	K39	—	—	—	—	—			
					3-wire (NPN)				—	—	—	—	IC				
—	Grommet	Yes	—	3 wire (NPN)	24 V	5 V, 12 V	—	M9NV	M9N	●	●	○	—	Relay (Note) PLC			
				3 wire (PNP)				M9PV	M9P	●	●	○	—				
				2 wire				M9BV	M9B	●	●	○	—				

* Lead wire length symbols: 0.5 m Nil (Example) A53
 3 m L (Example) A53L
 5 m Z (Example) A53Z

○: Manufactured upon receipt of order.
 Note) Switch can not be mounted on ø250

Mounting Bracket Part No.

Bore size (mm)	160	200	250
Foot ⁽¹⁾	L5160	L5200	L5250
Flange	F5160	F5200	F5250
Single clevis	C5160	C5200	C5250
Double clevis	D5160	D5200	D5250

Note 1) Two foot brackets and mounting bolts (4 pieces) are included in this no. (ø160 to ø250)

Note 2) Accessories for mounting brackets are as follows

Foot, Flange, Single clevis: Mounting bolts





Double clevis : Clevis pin, Retaining rings, Mounting bolts

Auto Switch Mounting Bracket Part No.




Bore size (mm)	160	200	250
D-A3/A4/K3/G3	BS1-160	BS1-200	—
D-A5/A6/F5/J5	BT-16	BT-16	BT-20
D-Z□/Y□	BS4-160	BS4-160	—
D-M9□	BS5-160	BS5-160	—

Accessory

Mounting Accessory, Cylinder

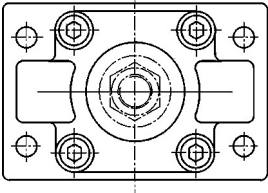	F Rod/Head side flange	D Female head side clevis (Corresponds to E accessories)	C Male head side clevis
Bore size (mm)			
	Supplied with 4 screws	Supplied with bolt, safety device and 4 screws	Supplied with 4 screws
160 200 250	F5160 F5200 F5250	D5160 D5200 D5250	C5160 C5200 C5250
	See page 6-43 for dimensions.	See page 6-43 for dimensions	See page 6-44 for dimensions.
	L Foot		
Bore size (mm)			
	Supplied with two pieces Supplied with 4 screws		
160 200 250	L5160 L5200 L5250		
	See page 6-43 for dimensions.		

Mounting Accessory, Rod

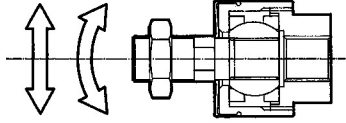
	GKM Rod clevis ISO 8140	KJ Piston rod ball joint ISO 8139	JA Floating joint
Bore size (mm)			
	Supplied with bolts and safety devices		
160 200 250	GKM35-54 GKM35-54 GKM40-84	KJ36D KJ36D KJ42D	JA160-36-200 JA160-36-200
	See page 6-45 for dimensions.	See page 6-45 for dimensions.	See page 6-45 for dimensions.

Series C95

Specifications

Bore size (mm)	160	200	250
Action	Double acting		
Fluid	Air		
Proof pressure	1.5 MPa		
Max. operating pressure	1.0 MPa		
Min. operating pressure	0.05 MPa		
Ambient and fluid temperature	Without auto switch: -10 to 70°C (No freezing) With auto switch: -10 to 60°C (No freezing)		
Lubrication	Not required (Non-lube)		
Operating piston speed	50 to 500 mm/s		
Allowable stroke tolerance	Up to 250: $^{+1.0}_0$, 251 to 1000: $^{+1.4}_0$, 1001 to 1500: $^{+1.8}_0$		
Cushion	Both ends (Air cushion)		
Thread tolerance	JIS Class 2		
Port size	G 3/4	G 1	
Mounting	Basic style, Axial foot style, Rod side flange style, Head side flange style, Single clevis style, Double clevis style, Center trunnion style		

Double-acting cylinder with cushioning adjustable at both ends, single piston rod



Minimum Stroke for Auto Switch Mounting

Refer to page 12 for "Minimum Stroke for Auto Switch Mounting".


Standard Stroke

Bore size (mm)	Max. * stroke
160	1600
200	2000
250	2400

Intermediate strokes are available.

* Please consult with SMC for longer strokes.


Theoretical Output



Bore size (mm)	Rod diameter (mm)	Operating direction	Piston area (mm ²)	Operating pressure (MPa)								
				0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
160	40	OUT	20106	4021	6032	8042	10053	12064	14074	16085	18095	20106
		IN	18850	3770	5655	7540	9425	11310	13195	15080	16965	18850
200	40	OUT	31416	6283	9425	12566	15708	18850	21991	25133	28274	31416
		IN	30159	6032	9048	12064	15080	18095	21111	24127	27143	30159
250	50	OUT	49087	9817	14726	19635	24544	29452	34361	39270	44178	49087
		IN	47124	9425	14137	18850	23562	28274	32987	37699	42412	47124

Note) Theoretical force (N) = Pressure (MPa) x Piston area (mm²)

Allowable Kinetic Energy

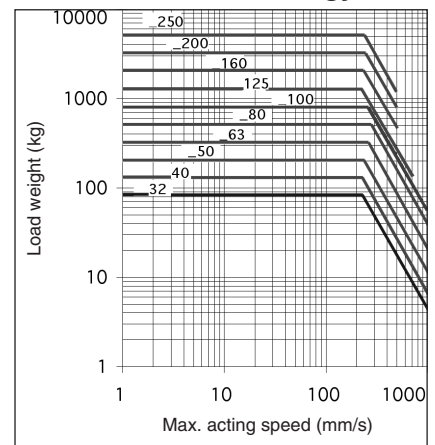

Example: Load limit at rod end when air cylinder ø200 is actuated with max. actuating speed 500 mm/s. See the intersection of lateral axis 500 mm/s and ø200 line, and extend the intersection to left. Thus the allowable load is 800 kg.

Weight/Aluminum Tube


Bore size (mm)		160	200	250	(kg)
Basic weight	Basic style	14.54	20.20	37.17	
	Foot style	4.90	7.76	15.00	
	Flange style	2.45	11.75	20.29	
	Single clevis style	6.90	9.10	18.60	
	Double clevis style	6.30	9.25	18.46	
	Trunnion style	4.50	7.23	14.40	
Additional weight per each 50 mm of stroke	All mounting brackets	0.83	0.90	1.60	
Accessory	Single rod clevis	1.62	1.62	2.76	
	Double clevis (With pin)	3.92	3.92	6.69	

Calculation: (Example) CP95SD160-100

- Basic weight 14.54 (kg) (Basic, ø160)
 - Mounting 6.30 (kg) (Double clevis)
 - Additional weight ... 0.83 (kg/50 st)
 - Cylinder stroke 100 (st)
- 14.54 + 0.83 x 100 50 + 6.30 = 22.50 kg

Construction

[First angle projection]

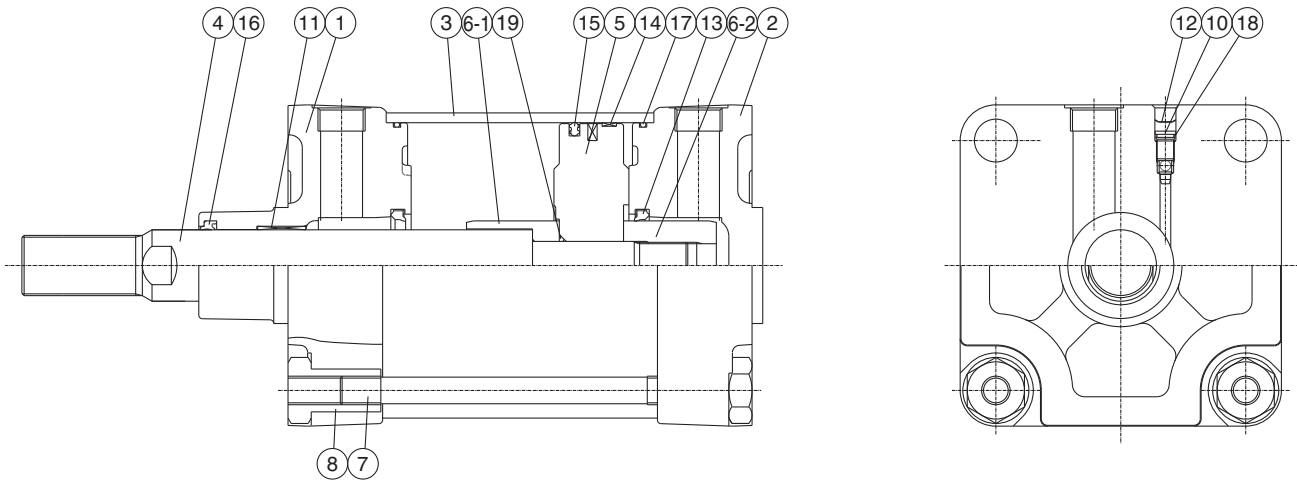

Component Parts

No.	Description	Material	Qty.	Note
①	Rod cover	Aluminum casted	1	
②	Head cover	Aluminum casted	1	
③	Cylinder tube	Aluminum alloy	1	
④	Piston rod	Carbon steel	1	
⑤	Piston	Aluminum alloy	1	
⑥	Cushion ring A	Rolled steel	1	
⑥	Cushion ring B	Rolled steel	1	
⑦	Tie-rod	Carbon steel	4	
⑧	Tie-rod nut	Steel	8	
⑩	Cushion valve	Steel wire	2	
⑪	Bushing	Lead-bronze casted	1	
⑫	Snap ring	Steel for spring	2	
⑬	Cushion seal	Urethane	2	
⑭	Wear ring	Resin	1	
⑮	Piston seal	NBR	1	
⑯	Rod seal	NBR	1	
⑰	Cylinder tube gasket	NBR	2	
⑱	Cushion valve seal	NBR	2	
⑲	Piston gasket	NBR	1	
⑳	Magnet ring		1	

Replacement Parts: Seal Kit

Bore size (mm)	Kit no.	Contents
160	CS95-160	Kits include items ⑬ to ⑰ from the table above.
200	CS95-200	
250	CS95-250	

* Seal kits consist of items ⑬ to ⑰ contained in one kit, and can be ordered using the order number for each respective tube bore size.


Quick Reference Guide
 C55
 C85
 C76
 CP95
C95
 -X (Made to Order)
 D- (Auto Switch)
 Model Selection Procedures

Series C95

Dimensions: Without Mounting Bracket

[First angle projection]

C95SB Bore size - Stroke

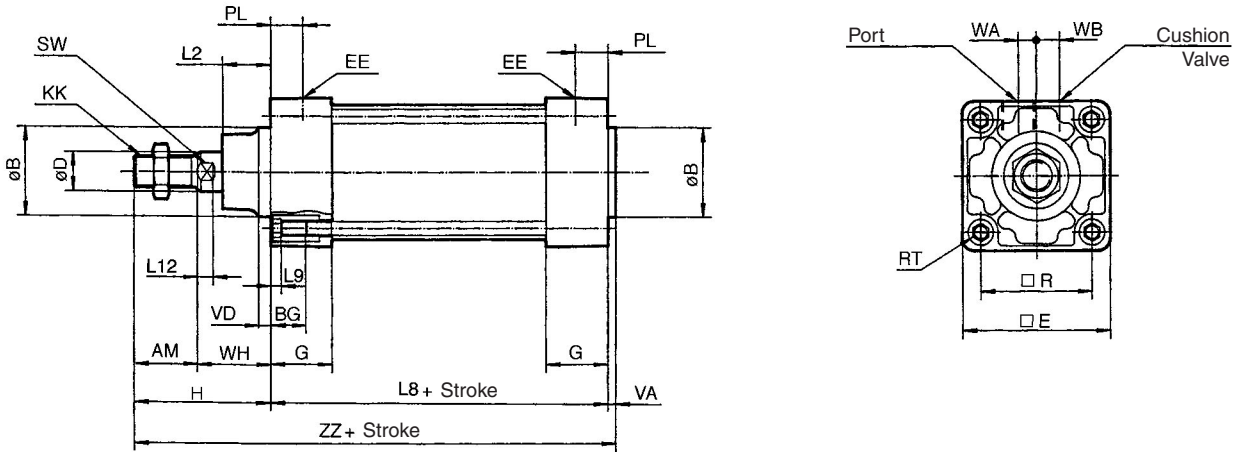


Bore size (mm)	AM	ϕB e11	ϕD	EE	PL	RT	L12	KK	SW	G	BG (Min.)	L8	VD	VA	WA	WB	WH	ZZ	$\square E$	$\square R$	L2	L9
160	72	65	40	G 3/4	30	M16 x 2	15	M36 x 2	36	55	27	180	8	6	15	25	80	338	180	140	50	0
200	72	75	40	G 3/4	35	M16 x 2	15	M36 x 2	36	57	27	180	15	6	18	25	95	353	220	175	55	0
250	84	90	50	G 1	31	M20 x 2.5	20	M42 x 2	46	59	29	200	20	10	20	28	105	399	270	220	65	0


Dimensions: Cylinder Mounting Accessory

[First angle projection]


Foot style (L)

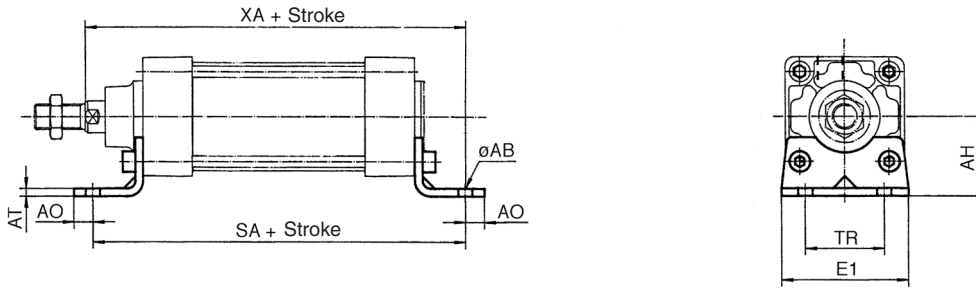


Center trunnion style (T)

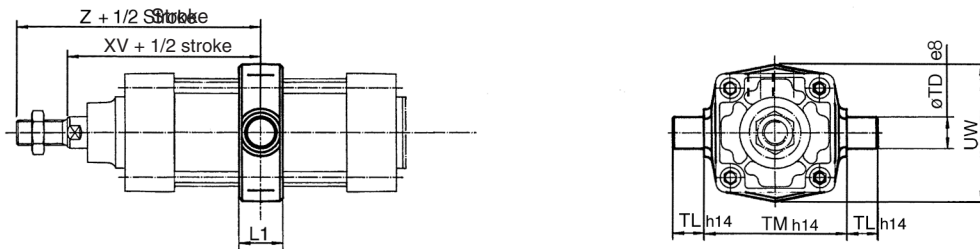

Flange style (F, G)

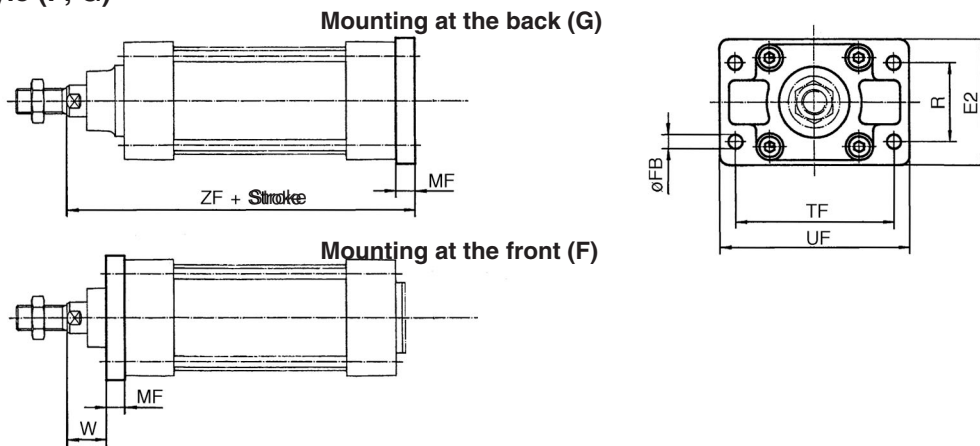

Head side single clevis style (C) Head side double clevis style (D)

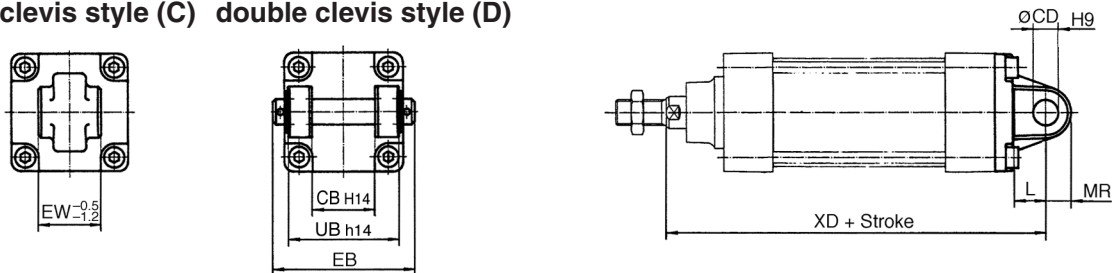

Bore (mm)	E1	R	W	MF	ZF	ϕFB	ϕCD H9	EB	L	XD	UB h14	CB h14	EW^{-0.5} ^{-1.2}	MR	TR	AO	AT	XA	SA	AH	ϕAB	L1	XV	Z	TL h14	ϕTD e8	TM h14	UW	TF	UF	E2
160	Max. 195	115	60	20	280	18	30	Max. 209	Min. 35	315	170	90	90	Max. 31	115	Max. 25	9	320	300	115	18	Max. 50	170	242	32	32	200	Max. 220	230	Max. 280	Max. 195
200	Max. 238	135	70	25	300	22	30	Max. 209	Min. 35	335	170	90	90	Max. 31	135	Max. 35	12	345	320	135	22	Max. 50	185	257	32	32	250	Max. 260	270	Max. 320	Max. 238
250	Max. 290	165	80	25	330	26	40	Max. 249	Min. 45	375	200	110	110	Max. 41	165	Max. 40	14.5	380	350	165	26	Max. 60	205	289	40	40	320	Max. 320	330	Max. 395	Max. 290

Quick Reference Guide
 C55
 C85
 C76
 CP95
C95
 -X (Made to Order)
 D- (Auto Switch)
 Model Selection Procedures





Series C95

Dimensions: Cylinder Mounting Accessory C, D, E and CR

[First angle projection]

Mounting style (C)

Mounting style (D)



Bore size (mm)	□E1	EW	□TG1	FL	l ₁	l ₂	Ød1	CD	MR	d2	R ₁	□E2	UB	CB
160	180	90	140	55	7	10	65	30	25	18	13	180	170	90
200	220	90	175	60	7	11	75	30	25	18	13	220	170	90
250	270	110	220	70	11	11	90	40	40	22	16.5	270	200	110

Dimensions: Piston Rod Mounting Accessory


[First angle projection]

Piston Rod Clevis (ISO 8140)
 Steel, Zinc Chromate Plated

Part no.	Bore size (mm)	e	b	d	øf h11	L1 max.	c min.	a max.	L min.
GKM35-54	160/200	M36 x 2	35 $\begin{matrix} +0.60 \\ +0.15 \end{matrix}$	144	35	201	54	70	57
GKM40-84	250	M42 x 2	40 $\begin{matrix} +0.60 \\ +0.15 \end{matrix}$	168	40	245	84	85	77

Piston Rod Ball Joint (ISO 8139)
 Steel, Zinc Chromate Plated

Part no.	Bore size (mm)	d3	d1 H9	h	d6 max.	b1 h12	L min.	α	L3
KJ36D	160/200	M36 x 2	35	125	80	43	56	16	55
KJ42D	250	M42 x 2	40	142	90	49	60	4	46

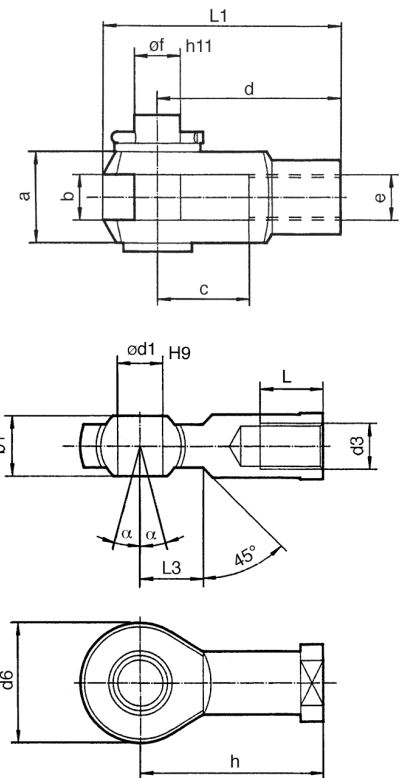


Dimensions: Piston Rod Mounting Accessory

[First angle projection]

Floating Joint JA
 Steel

Bore size (mm)	M	Part no.	A	B	C	øD	E	F	G	H	P	U	Load (kN)	Weight (g)	Angle
160, 200	M36 x 2	JA160-36-200	178	51	55	96	16	55	24	55	42	3	71	4700	5

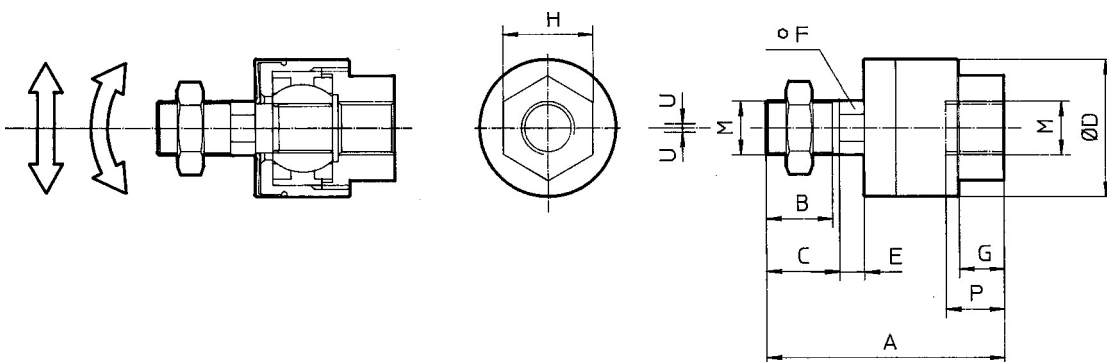

Quick Reference Guide

C55

C85

C76

CP95

C95

-X (Made to Order)

D- (Auto Switch)

Model Selection Procedures

Auto Switch Specifications

Applicable Auto Switch



Type	Auto switch model	Electrical entry (Function)
Reed switch	D-A5□/A6□	Grommet
	D-A59W	Grommet (2-color indication)
	D-Z7□/Z80	Grommet
	D-A3□	Terminal conduit
	D-A44	DIN terminal
Solid state switch	D-F5□/J5□	Grommet
	D-F5□W/J59W	Grommet (2-color indication)
	D-F5BAL	Grommet (2-color indication, Water resistant)
	D-F59F	Grommet (2-color indication, Diagnostic output)
	D-F5NTL	Grommet (With timer)
	D-Y59□	Grommet (In-line)
	D-Y69□	Grommet (Perpendicular)
	D-Y7P	Grommet (In-line)
	D-Y7PV	Grommet (Perpendicular)
	D-Y7□W	Grommet (2-color indication, In-line)
	D-Y7□WV	Grommet (2-color indication, Perpendicular)
	D-Y7BAL	Grommet (Water resistant, In-line)
	D-G39/K39	Terminal conduit

Minimum Stroke for Auto Switch Mounting

Auto switch model	No. of auto switches	Support bracket except center trunnion			Center trunnion		
		ø160	ø200	ø250	ø160	ø200	ø250
A5□ A6□	1, 2	10	10	10	125	125	145
	n	$10 + 55(n-2)/2$ n = 2, 4, 6, 8...	←	←	$125 + 55(n-4)/2$ n = 4, 8, 12, 16...	$125 + 55(n-4)/2$ n = 4, 8, 12, 16...	$145 + 55(n-4)/2$ n = 4, 8, 12, 16...
A59W	2	←	←	←	135	135	155
	n	←	←	←	$135 + 55(n-4)/2$ n = 4, 8, 12, 16...	$135 + 55(n-4)/2$ n = 4, 8, 12, 16...	$155 + 55(n-4)/2$ n = 4, 8, 12, 16...
F5□(W)/J5□/J59W F5BAL/F59F	1, 2	10	←	←	135	135	155
	n	$10 + 55(n-2)/2$ n = 2, 4, 6, 8...	←	←	$135 + 55(n-4)/2$ n = 4, 8, 12, 16...	$135 + 55(n-4)/2$ n = 4, 8, 12, 16...	$155 + 55(n-4)/2$ n = 4, 8, 12, 16...
F5NTL	1, 2	15	15	15	150	145	165
	n	$15 + 55(n-2)/2$ n = 2, 4, 6, 8...	←	←	$150 + 55(n-4)/2$ n = 4, 8, 12, 16...	$145 + 55(n-4)/2$ n = 4, 8, 12, 16...	$165 + 55(n-4)/2$ n = 4, 8, 12, 16...
A3□ K3□ G3□	1	10	10	—	140	140	—
	2 (Same side)	100	100	—	140	140	—
	2 (Different sides)	35	35	—	140	140	—
	n (Same side)	←	←	—	$140 + 100(n-2)$ n = 2, 4, 6, 8...	$140 + 100(n-2)$ n = 2, 4, 6, 8...	—
A44	n (Different sides)	←	←	—	$140 + 100(n-2)$ n = 2, 4, 6, 8...	$140 + 100(n-2)$ n = 2, 4, 6, 8...	—
	1	10	10	—	100	100	—
	2 (Same side)	55	55	—	100	100	—
	2 (Different sides)	35	35	—	100	100	—
Z7□/Z80	n (Same side)	←	←	—	$100 + 100(n-2)$ n = 2, 4, 6, 8...	$100 + 100(n-2)$ n = 2, 4, 6, 8...	—
	n (Different sides)	←	←	—	$100 + 100(n-2)$ n = 2, 4, 6, 8...	$100 + 100(n-2)$ n = 2, 4, 6, 8...	—
	1, 2	10	10	—	120	110	—
	n	←	←	—	$120 + 55(n-4)/2$ n = 4, 8, 12, 16...	$110 + 55(n-4)/2$ n = 4, 8, 12, 16...	—
Y59□/Y7P Y7□W	1, 2	10	10	—	110	110	—
	n	←	←	—	$110 + 55(n-4)/2$ n = 4, 8, 12, 16...	$110 + 55(n-4)/2$ n = 4, 8, 12, 16...	—
Y69□/Y7PV Y7□WV	1, 2	10	10	—	85	80	—
	n	←	←	—	$85 + 55(n-4)/2$ n = 4, 8, 12, 16...	$80 + 55(n-4)/2$ n = 4, 8, 12, 16...	—
Y7BAL	1, 2	10	10	—	120	120	—
	n	←	←	—	$120 + 55(n-4)/2$ n = 4, 8, 12, 16...	$120 + 55(n-4)/2$ n = 4, 8, 12, 16...	—

Auto Switch Mounting Position and Mounting Height

[First angle projection]



Auto Switch Mounting Position

Bore size (mm)	D-A5□ D-A6□		D-A59W		D-F5□, D-F5□W D-J5□, D-J59W D-F59F, D-F5BAL		D-F5NTL		D-Z7□, D-Y59□, D-Y7BAL D-Z80, D-Y69□ D-Y7P(V), D-Y7□W(V)		D-A3□, D-G39 D-A44, D-K39	
	A	B	A	B	A	B	A	B	A	B	A	B
160	19.5	18.5	23.5	22.5	26	25	31	30	23	22	19.5	18.5
200	17	17	21	21	23.5	23.5	28.5	28.5	20.5	20.5	17	17
250	20	30	24	34	26.5	36.5	31.5	41.5	—	—	—	—

Auto Switch Mounting Height

Bore size (mm)	D-A5□ D-A6□ D-A59W		D-F5□, D-F5□W, D-F5NTL D-J5□, D-J59W D-F59F, D-F5BAL		D-A3□, D-G39 D-K39		D-A44		D-Z7□, D-Y59□ D-Z80, D-Y7P D-Y7□W		D-Y69□ D-Y7PV D-Y7□WV		D-Y7BAL	
	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht	Hs	Ht
160	90	86	89	86	134.5	—	144.5	—	84.5	83	84.5	83	89.5	83
200	102.5	104	102	104	154	—	164	—	100.5	100.5	100.5	100.5	103	100.5
250	127	128	127	128	—	—	—	—	—	—	—	—	—	—

Switch Hysteresis

Bore size (mm)	ON-OFF switch hysteresis	
	Reed switch	Solid state switch
160 to 200	≤ 2 mm	≤ 1 mm
250	≤ 3 mm	≤ 1 mm

Other than the applicable auto switches listed in "How to Order", the following auto switches can be mounted. For detailed specifications, refer to page 8-1.

Type	Model	Electrical entry	Features
Solid state switch	D-F5NTL	Grommet (In-line)	With timer
	D-Y69A/Y69B/Y7PV	Grommet (Perpendicular)	—
	D-Y7NWV/Y7PWV/Y7BWV		2-color indication

* With pre-wire connector is available for solid state auto switches. For details, refer to page 8-1.

* Normally closed (NC = b contact), solid state switch (D-Y7G/Y7H type) are also available. For details, refer to page 8-1.

Series C95 Auto Switch Specifications



Applicable Auto Switch


Style	Auto switch model	Electrical entry (function)
Reed switch	D-A5□/A6	Grommet
	D-A59W	Grommet (2 color indication)
Solid state switch	D-F5□/J5	Grommet
	D-F5□W/J59W	Grommet (2 color indication)
	D-F5BAL	Grommet (2 color indication, Water resistant)
	D-F5□F	Grommet (2 color indication, diagnostic output)
	D-F5NTL	Grommet (Timer)

Minimum Strokes for Auto Switch Mounting


Style	Auto switch model	No. of auto switches	Support bracket except center trunnion					Center trunnion						
			ø32	ø40	ø50	ø63	ø80	ø100	ø32	ø40	ø50	ø63	ø80	ø100
Reed switch	D-A5, D-A6	2 (On different faces or same face)	15					20	60	80	105	110	115	
		1	20					25	60	70	85	110	115	120
Reed switch	D-A59W	2 (On different faces or same face)	15					25	60	70	85	110	115	120
		1	10					25	60	70	85	110	115	120
Solid state switch	D-F5/J5	2 (On different faces or same face)	15					25	60	70	85	110	115	120
		1	10					25	60	70	85	110	115	120
	D-F5NTL	2 (On different faces or same face)	15					25	70	75	95	120	125	130
		1	10					25	70	75	90	120	125	130
Solid state switch	D-F5□W D-J59W D-F5BAL D-F5□F D-F5LF	2 (On different faces or same face)	15					25	70	75	90	120	125	130
		1	10					25	70	75	90	120	125	130

Auto Switch Mounting Position and Mounting Height

Reed switch

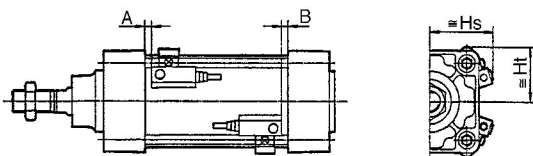

Solid state switch

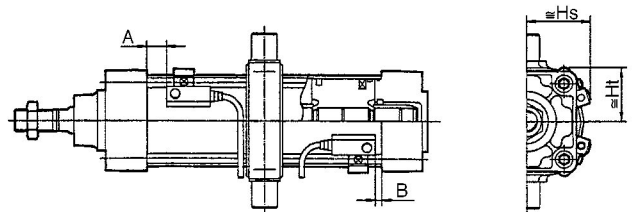


Auto Switch Mounting Position

Bore size (mm)	D-A5/D-A6		D-A59W		D-F5 D-J5		D-F5 W D-J59W D-F5BAL		D-F5NTL	
	A	B	A	B	A	B	A	B	A	B
ø32	10.5	0	14.5	2	17	4.5	21	8.5	22	9.5
ø40	21.5	0	25.5	2	28	4.5	32	8.5	33	9.5
ø50	23	0	27	2.5	29.5	5	33.5	9	34.5	10
ø63	28	0	32	2.5	34.5	5	38.5	9	39.5	10
ø80	28	2.5	22	6.5	24.5	9	28.5	13	29.5	14
ø100	28	2.5	32	6.5	34.5	9	38.5	13	39.5	14

Auto Switch Mounting Height

Bore size (mm)	D-A5 D-A6 D-A59W		D-F5, D-J5 D-F5 W, D-J59W D-F5BAL, D-F5NTL	
	Ht	Hs	Ht	Hs
ø32	24.5	35	25	32.5
ø40	27.5	38.5	27.5	36.5
ø50	34.5	43.5	34	41
ø63	39.5	48.5	39	46
ø80	46.5	55	46.5	52.5
ø100	55	62	55	59.5

Direct mount auto switches can be installed on tie-rod type cylinders

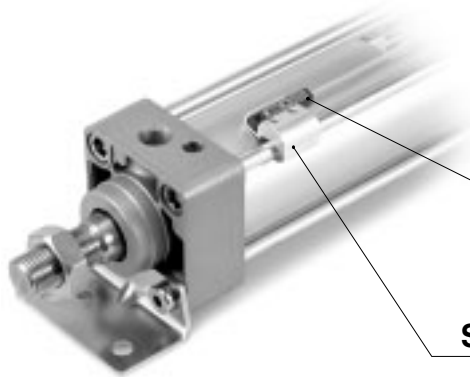

Direct mount type auto switch


Reed: D-Z7 Solid state: D-Y5
 D-Z8 D-Y6
 D-Y7

Switch mounting bracket

Direct mount type auto switches can now be attached to the tie-rods by using a special switch mounting bracket.


Smaller size

Protrusion of auto switches has been reduced

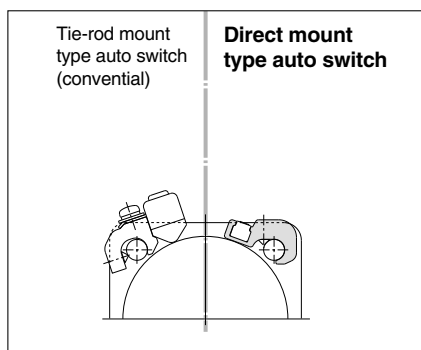


Easier handling

Auto switch mounting and positioning can be performed from one direction

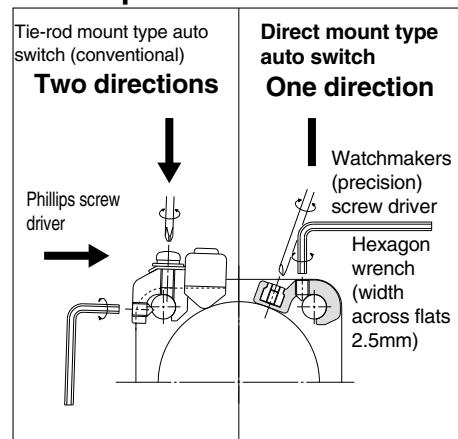

Auto Switch Mounting Bracket for D-M9□

Bore size (mm)	Order No.
ø32, ø40	BMB5-032
ø50, ø63	BA7-040
ø80, ø100	BA7-063



Switch Mounting Bracket Models

Bore size [mm]	Mounting bracket model	Accessory	Auto switch
32, 40	BMB4-032	Screw (M4 x 6L) 2 pcs.	Reed-Switch D-Z7 D-Z80
50, 63	BMB4-050		Solid state D-Y5 D-Y6 D-Y7
80, 100	BA4-063		

Applicable Auto Switches

auto switch models		Model	Special function	Electrical Entry	Indicator light	Wiring (output)	Load voltage		Lead wire length [m]			Applicable loads			
Electrical entry direction							DC	AC	0.5 (-)	3 (L)	5 (Z)				
Vertical	In-line														
—	Z76	Reed-Switch	—	Grommet	Yes	3-wire	—	5V	—	●	●	—	IC	—	
—	Z73					2-wire	24V	12V	100V	●	●	●	—	—	Relay, PLC
—	Z80					2-wire	5V, 12V	100V	●	●	—	—	—	—	—
Y69A	Y59A	Solid state Switch	—	Grommet	Yes	3-wire (NPN)	24V	5V	—	●	●	○	IC	Relay, PLC	
Y7PV	Y7P					3-wire (PNP)		12V		●	●	○	—		
Y69B	Y59B					2-wire		12V		●	●	○	—		
Y7NWV	Y7NW					3-wire (NPN)		5V		●	●	○	—		
Y7PWV	Y7PW					3-wire (PNP)		12V		●	●	○	—		
Y7BWV	Y7BW					2-wire		12V		●	●	○	—		
—	Y7BA					Water resistant (2-colour indicator)		—		—	—	—	—		—
M9NV	M9N	Solid state Switch	—	Connector and Grommet	Yes	3 wire (NPN)	24V	5V, 12V	—	●	●	○	IC circuit	Relay PLC	
M9PV	M9P					3 wire (PNP)		12V		●	●	○			
M9BV	M9B					2 wire		12V		●	●	○			


□ Lead wire length 0.5m..... — (Example: A53)
 3m..... L (Example: A53L)
 5m..... Z (Example: A53Z)

○: Manufactured upon receipt of order.

Series C95

Auto Switches

How to install auto switches

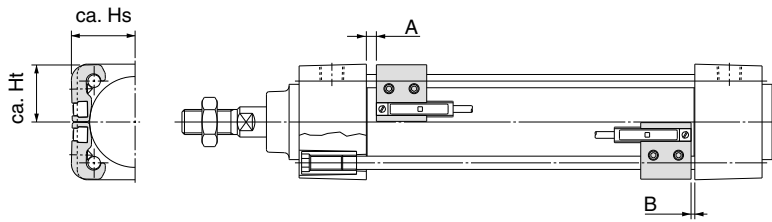

Auto Switch mounting positions and dimensions [mm]

Bore Size [mm]	All models		D-Z7/Z8, D-Y5/Y7 (W)		D-Y6, D-Y7 (W) V		D-Y7BA	
	A	B	Hs	Ht	Hs	Ht	Hs	Ht
32	14	1.5	25.5	23	26.5	23	30	23
40	25	1.5	29.5	26	30	26	34	26
50	26.5	2	33.5	31	34.5	31	38	31
63	31.5	2	39	36	40	36	43	36
80	31.5	6	47.5	45	48.5	45	52	45
100	31.5	6	55.5	53.5	56.5	53.5	60	53.5

Auto switch operating ranges [mm]

Bore Size [mm]	D-Z7 D-Z8	D-Y5/Y7 (W) D-Y6/Y7 (W) V	D-Y7BA
32	7.5	5.5	3.5
40	8.5	5.5	3.5
50	7.5	7	3.5
63	9.5	7.5	4
80	9.5	6.5	4.5
100	10.5	5.5	5

Note) This is a standard including hysteresis, and is not guaranteed. (variations as much as 30%)
There may be large changes depending on the ambient environment.

Minimum length [mm]

Auto Switch	with bracket T					
	Ø32	Ø40	Ø50	Ø63	Ø80	Ø100
D-Z7/Z8, D-Y5/Y7 (W)	80	85	90	90	95	100
D-Y6/Y7 (W) V	60	85	65	70	75	85
D-Y7BA	55	90	90	100	105	110

Mounting and Movement of Auto Switches


Caution!

When tightening the auto switch mounting screw, use a watchmakers screw driver with a handle diameter of about 5 to 6mm.

Furthermore, use a tightening torque of 0.05 to 0.1 Nm. As a rule, it should be turned about 90° from the point at which tightening can be felt. Use a tightening torque of 1 to 1.2 Nm for the hexagon socket head set screws (M4 x 0.7).

1. Place the mounting bracket on the cylinder tie-rod, and secure it in the detection position with the set screw so that the bottom of the mounting bracket makes firm contact with the cylinder tube. (Use a hexagon wrench)
2. Insert an auto switch into the switch mounting groove of the mounting bracket, and place it in the approximate auto switch mounting position.
3. After confirming the detection position, secure the auto switch by tightening the mounting screw which is included with it.
4. Return to step 2 to change the detection position.

Note) In order to protect the auto switch, install it so that its body is housed at least 15mm inside the switch mounting groove.

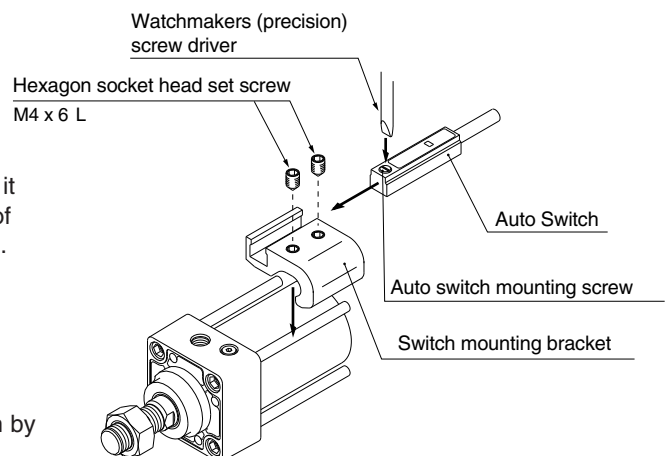



Series C95 Specific Product Precautions

Adjustment

⚠ Warning

- ① **Do not open the cushion valve above the stopper.**
Cushion valves are provided with a crimp ($\phi 32$) or a retaining ring ($\phi 40$ to $\phi 100$) as a stopping mechanism, and the cushion valve should not be opened above that point.
If air is supplied and operation started without confirming the above condition, the cushion valve may be ejected from the cover.

Bore size (mm)	Cushion valve	Width across flats	Socket wrench
32, 40, 50	MB-32-10-C1247	2.5	JIS 4648 Hex spanner wrench 2.5
63, 80, 100	MB-63-10-C1250	4	JIS 4648 Hex spanner wrench 4

Bore size (mm)	Cushion valve	Width across flats	Socket wrench
160, 200, 250	MB-A2-10-EA064	4	JIS 4648 Hex spanner wrench 4

- ② **When replacing brackets, use the hexagon wrenches shown below.**

Bore size (mm)		Bolt	Width across flats	Tightening torque (Nm)
32, 40		MB-32-48-C1247	4	4.9
50, 63		MB-50-48-C1249	5	11
80, 100	Foot	MB-80-48AC1251	6	25
	Others	MB-80-48BC1251		

Bore size (mm)		Bolt	Width across flats	Tightening torque (Nm)
160, 200		M16 x 2 x 30 L	14	99
250	Foot	M20 x 2.5 x 35 L	17	193.5
	Others	M20 x 2.5 x 30 L	17	

With Non-rotating Rod (Double Acting: Single Rod)

Operating Precautions


⚠ Caution

- ① **Do not apply more than the allowable rotating torque to the piston rod.**
If more than the allowable rotating torque is applied, the non-rotating guide will be deformed and there will be a significant loss of rotational accuracy. This may cause damage to the machinery.

Mounting & Piping

⚠ Caution

- ① **Mounting of a work piece at the rod end.**
When screwing a fitting or nut, etc. onto the threads at the end of the piston rod, push the piston rod into its fully retracted position, and grasp the protruding section with a wrench.
Furthermore, when tightening, take care that the torque is not applied to the non-rotating guide.

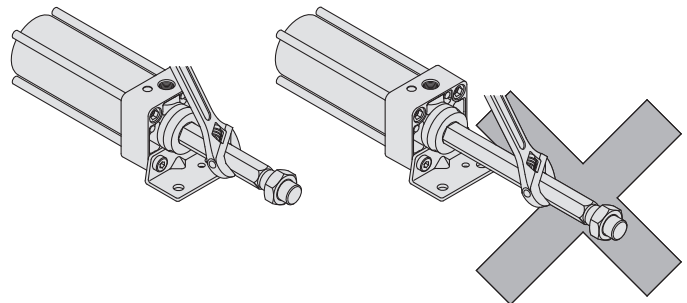

Made to Order Common Specifications Standard Air Cylinder

Contact SMC for the detailed specifications, delivery and prices.

Standard Air Cylinder/Made to Order Common Specifications

Spec.	No.	Symbol	Specifications/Descriptions	Standard air cylinder								Page	
				CJP	CJ2	CM2	CG1	MB	CA1	CS1	C95		CP95
Made to order common specifications	①	-XA0 to A30	Change of rod end shape								(4)	(4)	CD
	②	-XB5	Oversized rod cylinder										
	③	-XB6	Heat resistant cylinder (150°C)	(1)	(2)						(4)	(4)	
	④	-XB7	Cold resistant cylinder	(3)	(2)								
	⑤	-XB9	Low speed cylinder (10 to 50 mm/s)	(1)	(1)								
	⑥	-XB10	Intermediate stroke (Exclusive body use)										
	⑦	-XB11	Long stroke										
	⑧	-XB12	External stainless steel										
	⑨	-XB13	Low speed cylinder (5 to 50 mm/s)		(1)								
	⑩	-XC3	Special port position		(1)								
	⑪	-XC4	With heavy duty scraper										
	⑫	-XC5	Heat resistant cylinder (110°C)										
	⑬	-XC6	Piston rod and rod end nut made of stainless steel										
	⑭	-XC7	Tie rod, cushion valve, tie rod nut, etc. made of stainless steel										
	⑮	-XC8	Adjustable stroke cylinder/Adjustable extend stroke										
	⑯	-XC9	Adjustable stroke cylinder/Adjustable retract stroke										
	⑰	-XC10	Dual stroke cylinder/Double rod										
	⑱	-XC11	Dual stroke cylinder/Single rod										
	⑲	-XC12	Tandem cylinder										
	⑳	-XC13	Auto switch rail mounting										
	㉑	-XC14	Change of trunnion bracket mounting position										
	㉒	-XC15	Change of tie rod length										
	㉓	-XC17	Pin cylinder with rod quenched	(3)									
	㉔	-XC18	NPT port										
	㉕	-XC20	Head cover axial port										
	㉖	-XC22	Fluorine rubber seals										
	㉗	-XC24	With magnet shielding plate										
	㉘	-XC25	Without Air cushion valve										
	㉙	-XC27	Double clevis pin and double knuckle pin made of stainless steel										
	㉚	-XC28	Compact flange made of SS400										
	㉛	-XC29	Double knuckle joint with spring pin										
	㉜	-XC30	Front trunnion										
	㉝	-XC34	Rod does not extend beyond non-rotating plate										
	㉞	-XC35	With coil scraper										
	㉟	-XC36	With front guide boss										
	㊱	-XC37	Larger throttle diameter of connecting port										
	㊲	-XC38	Vacuum (Rod through hole)										
	㊳	-XC42	Built-in rear shock absorber										
	㊴	-XC51	With hose nipple										
	㊵	-XC52	Mounting nut with set screw										
	㊶	-XC56	With knock pin hole										
	㊷	-XC57	Rodless cylinder with floating joint										

□ Except air-hydro style for each cylinder

Note 1) Only double acting

Note 2) Only double acting (without switch)

Note 3) Only single acting

Note 4) Only for C95S-type