


**Inductive Sensors**  
**BES 516-3040-IO2-C-PU**  
**5 x 5 x 25**  
**normally-open**  
**Sn=0,8mm**  
**shielded**

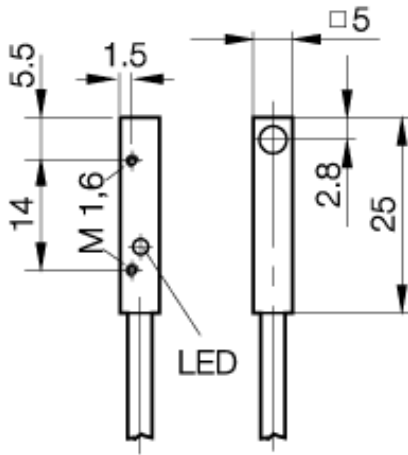

**Common Data**

Mounting in steel	shielded
Rated operating distance Sn	0,8mm
Assured operating distance Sa	0...0.65mm
Repeatability R	<= 5%
Hysteresis	<= 15%
Function indication	yes
Ambient temperature range	-25...+70°C
Polution Degree	3
IEC-Code	I1C05AP1
Time delay before availability	<= 10ms


**Mechanical Data**

Measurements BxHxT or DxT	5 x 5 x 25mm
Housing material	Aluminium
Material of sensing face	POM
Degree of protection	IP67IP
Connection	Cable
Cable type	LifY-11Y-O
Schock: Halfsinus, 30 gn, 11ms	
Vibration: 55 Hz, 1mm Amplitude, 3 x 30 Minutes	

**Electrical Data**

Current type	DC
Wiring	3-Wire
switching function	normally-open
Output signal	PNP
Rated operational voltage	24 DCV
Rated operational current	150mA
Supply voltage	10...30 DCV
Ripple	<= 10%
max. switching frequency	1000Hz
Minimum operational current	1.0mA
No-load supply current	<= 10/<= 1.5mA
Off-state current	<= 50µA
Voltage drop	<= 1.0/-V
Short circuit protection	yes
Protected against polarity reversal	yes

PX0712



Utilization categories DC 13  
 Insulation class -

Datasheet number:

Definitions see general catalog.  
 If not otherwise noted, ratings according to IEC 60947-5-2 (DIN EN60947-5-2)

Balluff GmbH  
 P.O.Box 1160  
 73761 Neuhausen Germany  
 Phone (07158) 173-0 Fax (07158) 5010