M-5304 | 7

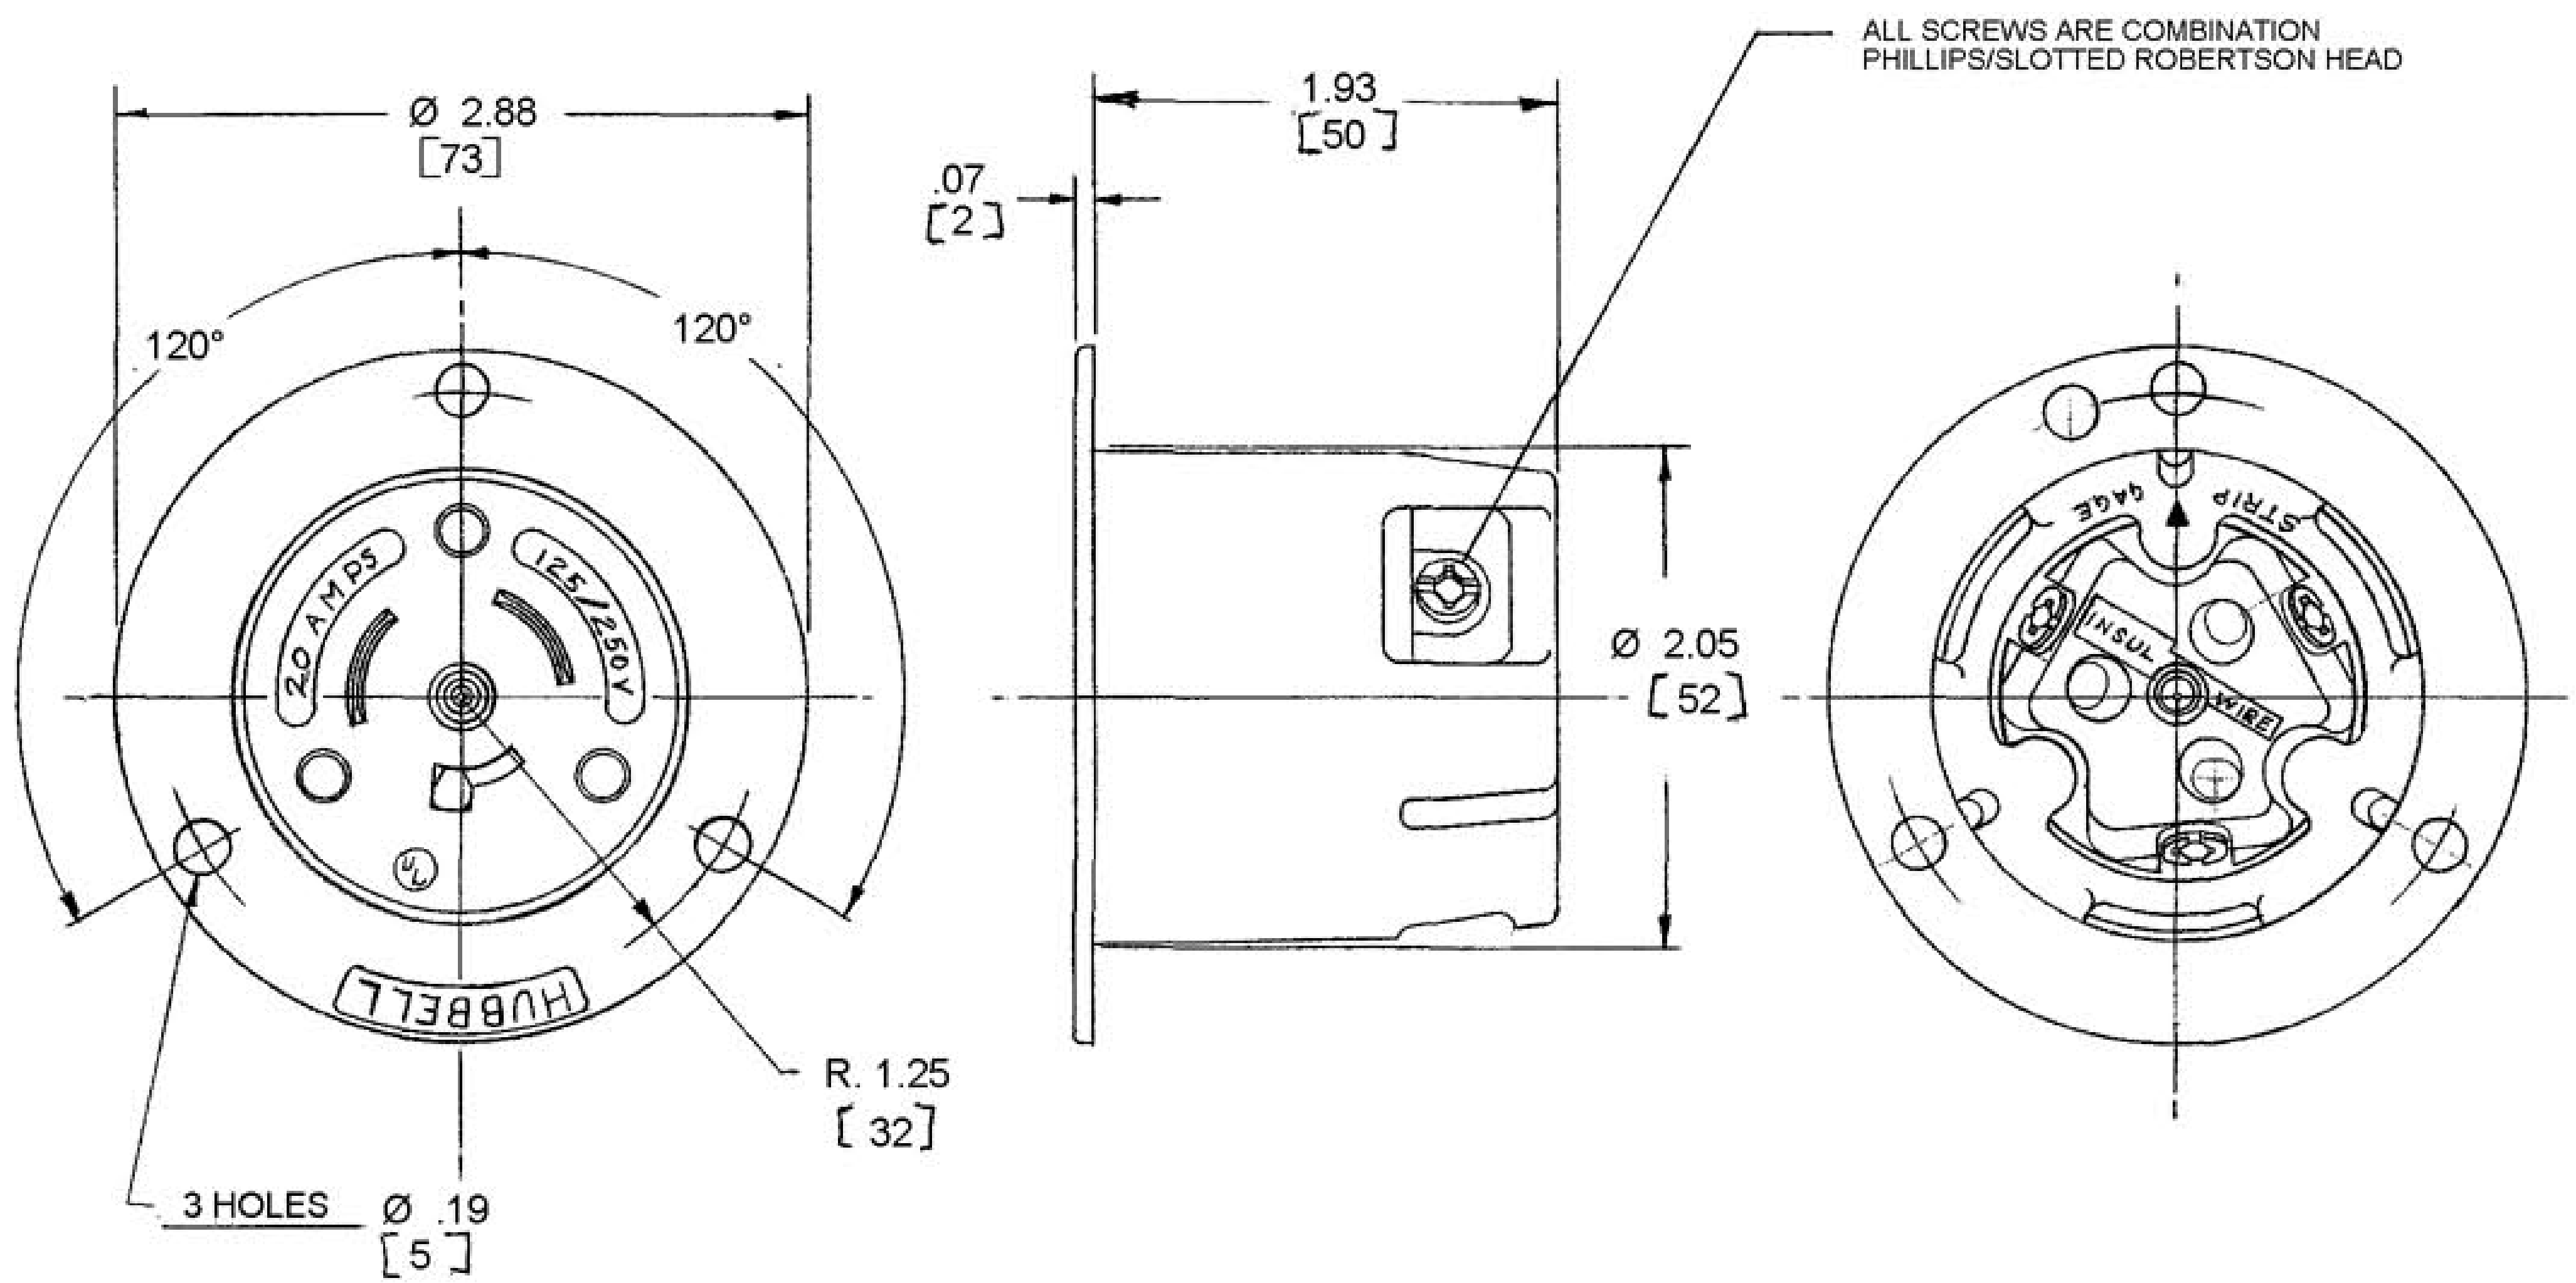

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
RETAINING SHELL	POLYCARBONATE	CLEAR
BLADE HOLDER	NYLON	NATURAL
CASING	NYLON	NATURAL
WIRE CLAMP (1)	.080 STEEL	NICKEL PL.
BLADES (3)	.060 BRASS	1- WHITE
TERMINAL SCREWS	BRASS	1- WHITE
		2- BRASS

DIMENSION SHEET FOR CAT. NO. HBL3325-C

REPAIRABLE ☐ NON-REPAIRABLE ☒

SYM	REVISIONS	APP	DATE
7	RETAINER MAT. POLY. WAS LEXAN. ADDED HBL SUFFIX TO CAT NO., ADDED SCREW NOTE PER DCN8996 MA	CJC	10/11/01
6	REVISED SCREW HEADS TO TRI-DRIVE PER DCN 7633 RCM	DVB	6/23/00
5	NUMEROUS CHANGES, SEE RECORD PRINT PER DCN #4114. DJG	JZ	6-8-96
4	CHANGED "2" DIM. TO 1 15/16 & 2 1/16 TO 2 3/64 AJL	CJC	1-20-92
3	BLADE HOLDER WAS ZYTEL WIRE CLAMP WAS ZINC PL. REMOVED CSA MARKING AJL	CJC	2-5-90
2	CASING MAT'L WAS LEXAN AJL.		4-1-76
1	RETAINING SHELL WAS BLACK CASING WAS NATURAL		7-6-72

B

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
20A 125/250V 3P-3W TWISTLOCK FLANGED INLET NON-NEMA

M-5304

TOLERANCES UNLESS OTHERWISE SPECIFIED	WIRING DEVICE-KELLEMS HUBBELL INCORPORATED BRIDGEPORT, CT	
FRACTIONS ±1/64	DR. BY KHF	APP. BY
DECIMALS ±.005	TR. BY	SCALE FULL
ANGLES ±2°	CHK'D BY	DATE 5/5/71

7

CODE 74545