

ECS-P-122X169-S-UV1-B - Front plate



2230008

<https://www.phoenixcontact.com/us/products/2230008>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Screw locking blank faceplate of the ECS Family. IP66/67/69 rated when mated with associated enclosure. Color: Black (9005), Width: 163 mm, Height: 30 mm, Depth: 62 mm



Your advantages

- Housing design supports the installation of a range of PCB thicknesses for high application diversity
- Optional accessories for wall and mast mounting
- Proven PCB connection technology
- Integrated tamper protection
- Effective protection of electronics against thermal and mechanical influences
- Suitable for outdoor/indoor applications

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2230008 |
| Packing unit | 5 pc |
| Minimum order quantity | 5 pc |
| Sales key | AC04 |
| Product key | ACFDAB |
| GTIN | 4055626381435 |
| Weight per piece (including packing) | 114.21 g |
| Weight per piece (excluding packing) | 112 g |
| Customs tariff number | 84879090 |
| Country of origin | US |

ECS-P-122X169-S-UV1-B - Front plate

2230008

<https://www.phoenixcontact.com/us/products/2230008>

Technical data

Notes

| | |
|---------------|---|
| Assembly note | Refer to the data sheet for the range in the download area. |
|---------------|---|


Product properties

| | |
|----------------|-----------------|
| Product type | Front plate |
| Housing type | Outdoor housing |
| Housing series | ECS |
| Product family | ECS..122X..S.. |

Data management status

| | |
|------------------|----|
| Article revision | 05 |
|------------------|----|

Dimensions
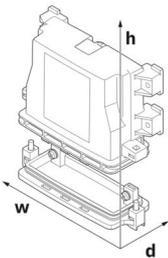
| | |
|---------------------|---|
| Dimensional drawing |  |
| Width | 163 mm |
| Height | 30 mm |
| Depth | 62 mm |

PCB design

| | |
|---------------|---------------------|
| PCB thickness | 1.57 mm ... 2.36 mm |
|---------------|---------------------|

Material specifications

| | |
|--|--------------------|
| Color (Housing) | black (RAL 9005) |
| Flammability rating according to UL 94 | V0 |
| Housing material | PC (polycarbonate) |
| Surface characteristics | untreated |

Environmental and real-life conditions

Vibration test

| | |
|------------------------|---------------------------|
| Specification | IEC 60068-2-6:2007-12 |
| Frequency | 10 - 2000 - 10 Hz |
| Sweep speed | 1 octave/min |
| Acceleration | 15g (61.6 Hz ... 2000 Hz) |
| Test duration per axis | 2.5 h |
| Test directions | X-, Y- and Z-axis |

ECS-P-122X169-S-UV1-B - Front plate



2230008

<https://www.phoenixcontact.com/us/products/2230008>

Glow-wire test

| | |
|------------------|------------------------|
| Specification | IEC 60695-2-11:2014-02 |
| Temperature | 850 °C |
| Time of exposure | 30 s |

Mechanical strength / tumbling barrel

| | |
|----------------|------------------------|
| Specification | IEC 60068-2-31:2008-05 |
| Height of fall | 50 cm |
| Frequency | 50 |

Shocks

| | |
|--------------------------------|-----------------------------------|
| Specification | IEC 60068-2-27:2008-02 |
| Pulse shape | Semi-sinusoidal |
| Acceleration | 50g |
| Shock duration | 11 ms |
| Number of shocks per direction | 3 |
| Test directions | X-, Y- and Z-axis (pos. and neg.) |

Salt spray test

| | |
|---------------|---------------------------|
| Specification | DIN EN 60068-2-11:2000-02 |
| Test duration | 96 h |

Test for substances that would hinder coating with paint or varnish

| | |
|---------------|--------------------|
| Specification | VDMA 24364:2018-05 |
| Result | Test passed |

Degree of protection (IP code)

| | |
|---------------------------------------|---|
| Specification | IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08 |
| Result, degree of protection, IP code | IP66/IP68 (2 m/24 h) |

Ambient conditions

| | |
|---|-------------------|
| Degree of protection | IP66/IP67 |
| Max. NEMA code to attain | 6 |
| Impact strength | IK08 |
| Ambient temperature (operation) | -40 °C ... 100 °C |
| Ambient temperature (storage/transport) | -40 °C ... 100 °C |

PCB data

| | |
|-----------------------|---------------------|
| Number of PCB holders | 1 |
| Thickness of the PCB | 1.57 mm ... 2.36 mm |

Mounting

| | |
|---------------|-------------------------|
| Mounting type | Screw locking mechanism |
| Thread type | () |


ECS-P-122X169-S-UV1-B - Front plate

2230008

<https://www.phoenixcontact.com/us/products/2230008>

Drawings

Dimensional drawing

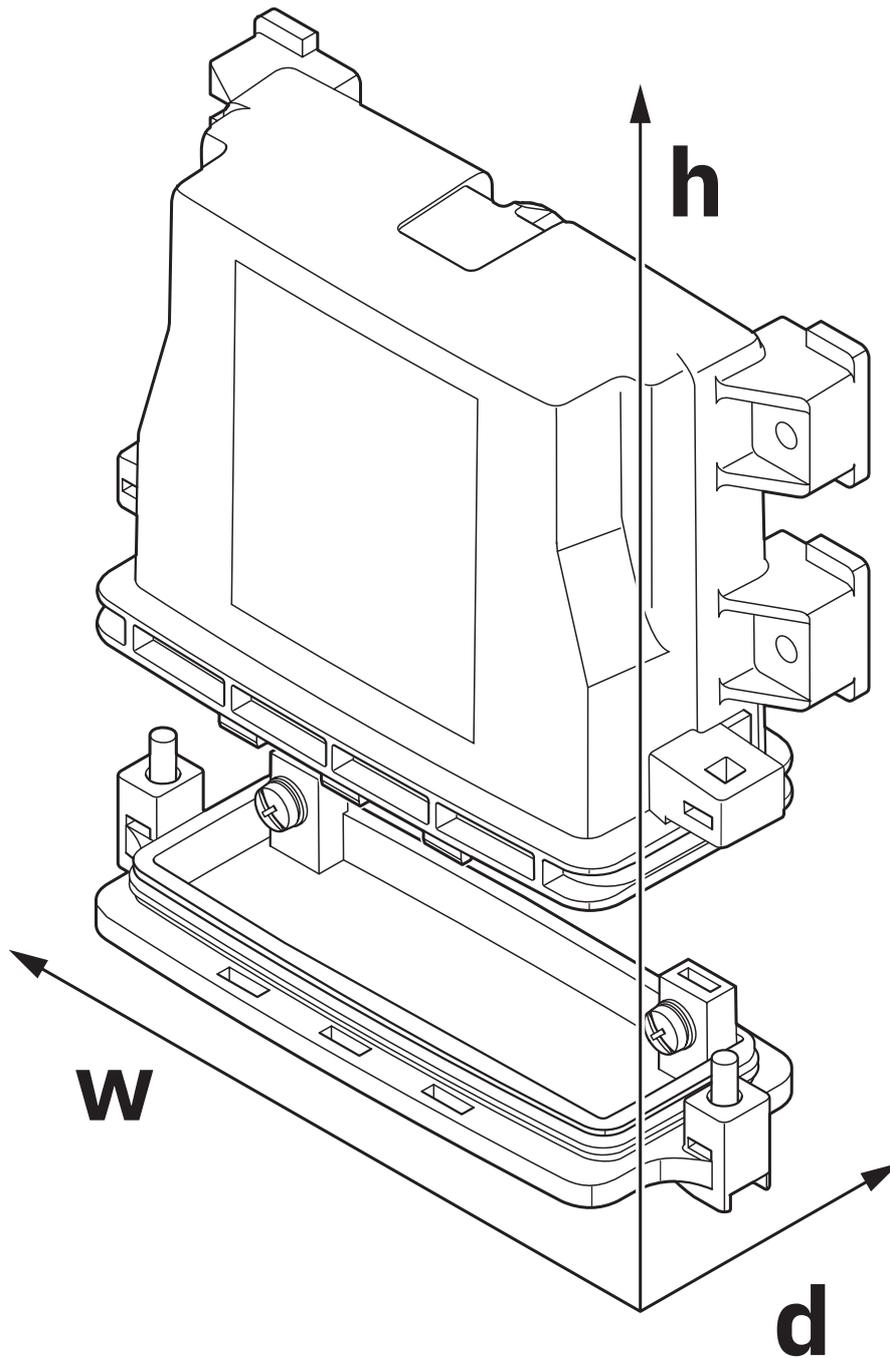

Schematic figure for illustrating the item dimensions. The figure is not of the desired product. For further details, refer to the product drawings in the "Downloads" tab.

ECS-P-122X169-S-UV1-B - Front plate



2230008

<https://www.phoenixcontact.com/us/products/2230008>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2230008>

DNV

Approval ID: TAE00003W8

ECS-P-122X169-S-UV1-B - Front plate



2230008

<https://www.phoenixcontact.com/us/products/2230008>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27182702 |
| ECLASS-13.0 | 27190603 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC002779 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 31261500 |
|-------------|----------|

ECS-P-122X169-S-UV1-B - Front plate



2230008

<https://www.phoenixcontact.com/us/products/2230008>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com