


VCT.p

Lobe knobs
with coloured centre cap



ELESA Original design

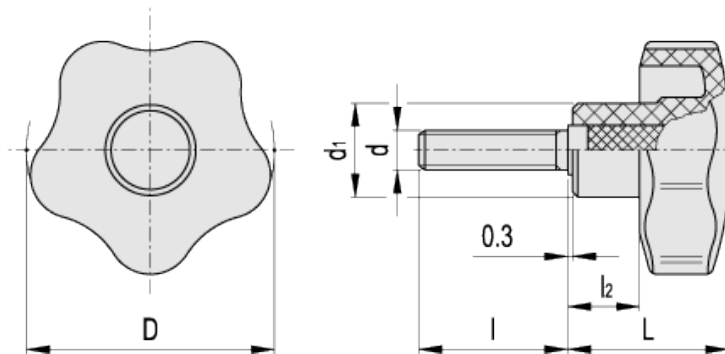

* Complete with colour index, example: 69872-C2 VCT.32 p-M5x20-C2.

C9
 C2
 C3
 C4
 C5
 C6
 RAL9005 RAL2004 RAL7035 RAL1021 RAL5024 RAL3000

Elesa Standards		Main dimensions				Threaded stud		C #	Weight
Code	Description	D	L	d ₁	l ₂	d _{6g}	l	[Nm]	g
69872-*	VCT.32 p-M5x20-*	32	23	15	10	M5	20	6	13
69851-*	VCT.32 p-M6x16-*	32	23	15	10	M6	16	8	13
69852-*	VCT.32 p-M6x20-*	32	23	15	10	M6	20	8	14
69853-*	VCT.32 p-M6x25-*	32	23	15	10	M6	25	8	15
69854-*	VCT.32 p-M6x30-*	32	23	15	10	M6	30	8	16
69856-*	VCT.32 p-M6x40-*	32	23	15	10	M6	40	8	18
69859-*	VCT.32 p-M8x16-*	32	23	15	10	M8	16	8	14
69861-*	VCT.32 p-M8x20-*	32	23	15	10	M8	20	8	18
69863-*	VCT.32 p-M8x30-*	32	23	15	10	M8	30	8	21
69865-*	VCT.32 p-M8x40-*	32	23	15	10	M8	40	8	24
69901-*	VCT.40 p-M6x20-*	40	27	17	12	M6	20	13	18
69902-*	VCT.40 p-M6x25-*	40	27	17	12	M6	25	13	19
69903-*	VCT.40 p-M6x30-*	40	27	17	12	M6	30	13	20
69911-*	VCT.40 p-M8x16-*	40	27	17	12	M8	16	16	23
69912-*	VCT.40 p-M8x20-*	40	27	17	12	M8	20	16	24
69913-*	VCT.40 p-M8x25-*	40	27	17	12	M8	25	16	26

69914-*	VCT.40 p-M8x30-*	40	27	17	12	M8	30	16	27
69915-*	VCT.40 p-M8x35-*	40	27	17	12	M8	35	16	28
69916-*	VCT.40 p-M8x40-*	40	27	17	12	M8	40	16	30
69917-*	VCT.40 p-M8x45-*	40	27	17	12	M8	45	16	32
69919-*	VCT.40 p-M8x55-*	40	27	17	12	M8	55	16	36
69960-*	VCT.50 p-M8x16-*	50	32	19	14	M8	16	16	26
69961-*	VCT.50 p-M8x20-*	50	32	19	14	M8	20	16	28
69962-*	VCT.50 p-M8x25-*	50	32	19	14	M8	25	16	30
69963-*	VCT.50 p-M8x30-*	50	32	19	14	M8	30	16	31
69965-*	VCT.50 p-M8x40-*	50	32	19	14	M8	40	16	33
69967-*	VCT.50 p-M8x50-*	50	32	19	14	M8	50	16	35
69971-*	VCT.50 p-M10x20-*	50	32	19	14	M10	20	23	36
69973-*	VCT.50 p-M10x30-*	50	32	19	14	M10	30	23	41
69975-*	VCT.50 p-M10x40-*	50	32	19	14	M10	40	23	46
69977-*	VCT.50 p-M10x50-*	50	32	19	14	M10	50	23	51
70021-*	VCT.63 p-M10x20-*	63	37	22	16	M10	20	37	54
70023-*	VCT.63 p-M10x30-*	63	37	22	16	M10	30	37	59
70025-*	VCT.63 p-M10x40-*	63	37	22	16	M10	40	37	64
70027-*	VCT.63 p-M10x50-*	63	37	22	16	M10	50	37	69
70029-*	VCT.63 p-M10x60-*	63	37	22	16	M10	60	37	74
70032-*	VCT.63 p-M12x30-*	63	37	22	16	M12	30	46	67
70036-*	VCT.63 p-M12x50-*	63	37	22	16	M12	50	46	79
70083-*	VCT.74 p-M12x30-*	74	43.5	26	22	M12	30	68	86
70085-*	VCT.74 p-M12x50-*	74	43.5	26	22	M12	50	68	98
70087-*	VCT.74 p-M12x70-*	74	43.5	26	22	M12	70	68	110
70095-*	VCT.74 p-M14x50-*	74	43.5	26	22	M14	50	78	106
70099-*	VCT.95 p-M16x50-*	95	46	32	21	M16	50	138	175

"Max limit Tightening torque" means the max torque value at which the metal insert, in normal conditions of use, is perfectly and strongly anchored to the plastic material.

Elesa Standards		Main dimensions				Threaded stud		C #	Weight
Code	Description	D	L	d ₁	l ₂	d _{6g}	l	[Nm]	g
69816-C9	VCT.25 p-M4x6-C9	25	19	13	8	M4	6	5	5
69817-C9	VCT.25 p-M4x10-C9	25	19	13	8	M4	10	5	6
69821-C9	VCT.25 p-M5x10-C9	25	19	13	8	M5	10	6	7
69822-C9	VCT.25 p-M5x16-C9	25	19	13	8	M5	16	6	8
69823-C9	VCT.25 p-M5x20-C9	25	19	13	8	M5	20	6	9
69824-C9	VCT.25 p-M5x25-C9	25	19	13	8	M5	25	6	10
69831-C9	VCT.25 p-M6x10-C9	25	19	13	8	M6	10	6	8
69832-C9	VCT.25 p-M6x16-C9	25	19	13	8	M6	16	6	9
69833-C9	VCT.25 p-M6x20-C9	25	19	13	8	M6	20	6	10
69834-C9	VCT.25 p-M6x30-C9	25	19	13	8	M6	30	6	12

"Max limit Tightening torque" means the max torque value at which the metal insert, in normal conditions of use, is perfectly and strongly anchored to the plastic material.

Material

High-resilience polypropylene based (PP) technopolymer. Resistant to solvents, oils, greases and other chemical agents.

Colour

Black, matte finish.

Coloured centre cap (only for VCT.32-40-50-63-74-95)

Technopolymer, matte finish.

To order, add the index of the colour (C9, ..., C6) to the code and the description.

On request and for sufficient quantities, it can be supplied in other colours or with customised graphic symbols, marks or writings.

Standard execution

Zinc-plated steel threaded stud, chamfered flat end according to UNI 947 : ISO 4753 (see [Technical Data](#)).



STANDARD MACHINE ELEMENTS WORLDWIDE

ELESA models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.