

Cartridge Fuse Holders

345 HV Series Panel Mount Enclosed Fuse Holders





Additional Information







Resources

Samples

Product Characteristics

Compatible Fuses	For 3AB/3AG, 5×20mm Fuses					
Description	besigned to eliminate the possibility of electrical shock, as defined in IEC standards 60127-6. The universal fuseholder body will accept 3AB, 3AG, and 5 × 20mm fuse sizes.					
Electrical	Insulation Resistance: 10,000 megohm minimum at 500 VDC. Contact Resistance: Less than .005 ohm average at currents up to 1 ampere. Dielectric Strength: 4,000 volts minimum.					
Mounting	Threaded styles withstand 15 inlb. mounting torque. Low profile and High profile panel thickness: .032" min./.310" max.					
Molded Parts	Body Material: Black glass-filled thermoplastic (UL 94V0).					
Knob Material Grey or black glass-filled thermoplastic (UL94 V-0) He Nut Material: Black glass-filled thermoplastic.						
Knob	Fuse Extractor type with plated copper alloy insert. Plated copper alloy contact clips. Spring loaded, locking mechanism provides an anti-tease feature and will not vibrate loose.					
Terminals	Plated cooper alloy, A-187; dual purpose terminal accepts wire for soldering or a Quick-Connect receptacle.					
Ambient Temperature	-40°C to +85°C.					
Hardware	Threaded style fuseholders are supplied with a thermoplastic hex nut unassembled.					


^{*} Please refer to Fuseology section for information on proper fuseholder re-rating.


Agency Approval


Agency	Agency File Number	3AG/AB	5×20mm	
7U	E14721	20A, 600V	20A, 600V	
(7316	20A, 600V	20A, 600V	


Cartridge Fuse Holders


Dimensions










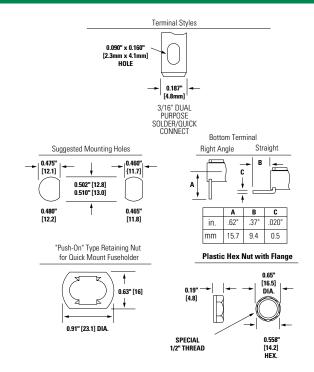



Part Numbering System

Part N	umber	Knob Type	KnohTyno	Low	High	Front	Rear	Rt. Angle	Straight	Packing
(3AG/AB)	5x20mm		Profile	Profile	Mount	Mount	Terminal	Terminal	Facking	
03450601H	03450621H	Screwdriver Slot	X	-	X	-	X	-	Bulk (100 pieces)	
03450602H	03450622H	Screwdriver Slot	-	X	X	-	X	-	Bulk (100 pieces)	
03450603H	03450623H	Finger Grip	-	X	X	-	X	-	Bulk (100 pieces)	
03450611H	03450631H	Screwdriver Slot	X	-	X	-	-	X	Bulk (100 pieces)	
03450612H	03450632H	Screwdriver Slot	-	X	X	-	-	X	Bulk (100 pieces)	
03450613H	03450633H	Finger Grip	-	X	X	-	-	X	Bulk (100 pieces)	
03450701H	-	Screwdriver Slot	Х	-	Х	-	X	-	Bulk (100 pieces)	
03450711H	-	Screwdriver Slot	X	-	X	-	-	X	Bulk (100 pieces)	
03450903H	03450923H	Finger Grip	-	X	-	X	X	-	Bulk (100 pieces)	
03450913H	03450933H	Finger Grip	-	X	-	X	-	X	Bulk (100 pieces)	

Cartridge Fuse Holders

345 HV Series Shock Safe Circuit Board Mount Enclosed Fuse Holders Rolls 🚳 🕦 🅸











Product Characteristics Compatible Fuse зав 5×20mm Similar to our Shock-Safe panel mount fuseholders, this series is designed per IEC Standards 60127-6. Two different knob styles available are available for use with 3AG and 3AB (¼ $^{\prime\prime}$ × 1¼ $^{\prime\prime}$) or 5 × 20mm fuses. Description Insulation Resistance: 10,000 megohm minimum at 500 VDC. Electrical Contact Resistance: Less than .005 ohm average at a current of one ampere. 4000 volts minimum. Dielectric Strength Mounting: Intended for soldering to printed circuit boards. **Molded Parts** Body Material: Black glass-filled thermoplastic (UL 94V0). Screwdriver slot, fuse extractor type with nickel-plated, copper alloy insert. Spring-loaded, bayonet style Knob Knob Material: Grey or Black glass-filled thermoplastic (UL94 V-0) **Terminals** Brass. Tin-plated. **Ambient Temperature** -40°C to +85°C

Agency Approvals

Agency	Agency File Number
71	E14721
⊕ .	7316
_DVE	133923

^{*} Please refer to Fuseology section for information on proper fuseholder re-rating.

Ordering Information


Ordering Part Number	Catalog Number	Fuse Size	Packing
03450101H	345 101	¼" × 1¼" Fuses	Bulk (100 pieces)
03450121H	345 121	5 × 20mm Fuses	Bulk (100 pieces)

Body only: 03450101HX010

Knob only: 03450101HX020 (1/4" × 11/4") Grey; 03450121HX020 (5 × 20mm) Black.

Dimensions 0.49" [12.5] [45.0] 0.44" [11.2] 0.48" [12.2] 0.12" [3.1] **←** 0.20" [5.1] **←** 0.68" → ← 0.24" [6.1] 0.040"-[17.3]

Recommended hole Pattern



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

03450101HX010 03450101HX020 03450121HX020