

# NT24k<sup>®</sup>-DR16 Modular Industrial Switch

N-Tron<sup>®</sup> Networking Series



## Managed Gigabit Industrial Ethernet Switch

The N-Tron<sup>®</sup> series NT24k<sup>®</sup>-DR16 is a modular managed switch designed for factory automation, utilities, security surveillance, SCADA and other industrial applications.

The Red Lion N-Tron series NT24k-DR16 managed industrial Ethernet switch features connectivity for up to 16 Gigabit ports and offers a wide range of connectivity options—including 100Base, Gigabit, fiber optic and copper options—in a rugged DIN-rail mountable enclosure. Designed to handle the most demanding environments, the NT24k-DR16 delivers wire-speed throughput and includes expanded shock and vibration tolerances, extreme operating temperature range and two slots to accommodate mix-and-match port modules. N-Ring<sup>™</sup> technology restores network communication within ~30ms of fault detection. Robust remote monitoring capabilities make management easy.



### APPLICATIONS

- > Factory Automation
- > Utilities
- > SCADA
- > Security Surveillance
- > Transportation
- > Alternative Energy

### PRODUCT HIGHLIGHTS

- > All Gigabit Modular Design
- > Up to 16 Port Connections
- > High Environmental Specifications
- > N-Ring Advanced Ring Technology
- > Robust Remote Monitoring
- > Smart Plug-and-Play Operation

### IEEE 1588v2 PTP OPTIONS

- Boundary Clock
- Transparent Clock

IEEE 1588v2 applications include

- Coordinated motion control
- Time-stamped data logging
- Time-stamped fault detection

PTP Models & Upgrade Kit Available

### FEATURES & BENEFITS

- > Supports up to two of the following port modules:
  - 8-port 10/100/1000BaseT(X) module
  - 8-port 100Base fiber module
  - 8-port 1000Base fiber module
  - 8-port Gigabit SFP module
  - 8-port dual mode SFP module (100Base or 1000Base SFP transceivers)
- > -40°C to 75°C operating temperature
- > Power input selections:
  - Low Voltage: 18-49 VDC
  - High Voltage: 90-264 VAC or 90-300 VDC
- > Onboard temperature sensor
- > ESD and surge protection diodes on all copper ports
- > Auto-sensing 10/100/1000BaseT(X), duplex and MDIX
- > USB configuration port
- > Configurable alarm contact
- > Optional backup/restore configuration device
- > Fully managed features include:
  - SSH/SSL/HTTPS
  - SNMP v1, v2, v3
  - Web browser management
  - Detailed ring map and fault location charting
  - RSTP - 802.1d, 802.1w, 802.1D
  - Trunking and port mirroring
  - 802.1Q tag VLAN and port VLAN
  - IEEE 802.1x with RADIUS remote server authentication
  - DHCP Server, Option 82 relay, Option 61, IP fallback
  - Port Security – MAC address based
  - 802.1p QoS, port QoS and DSCP
  - Event Log/Syslog
  - SNTP (Simple Network Time Protocol)
  - IEEE 1588v2 (PTP) models available
  - Multi-Member N-Ring technology with ~30ms healing
  - N-Link<sup>™</sup> redundant ring technology
  - N-View<sup>™</sup> monitoring technology
  - EtherNet/IP<sup>™</sup> CIP<sup>™</sup> messaging
  - 802.1AB-2005 LLDP (Link Layer Discovery Protocol)

industrial  
networking



EtherNet/IP<sup>™</sup>

# Managed Gigabit Industrial Ethernet Switch Specifications

## SWITCH PROPERTIES

Number of MAC Addresses: 16K  
 IEEE 1588v2 Software-Based Option  
 Aging Time: Programmable  
 Latency (typical): 1.6  $\mu$ s  
 Switching Method: Store & Forward  
 MTBF: >1 million hours  
 Jumbo Frame Support

## POWER INPUT OPTIONS

Select one:  
 Low Voltage: 18-49 VDC  
 High Voltage: 90-264 VAC or 90-300 VDC  
 Input Current (max): 1.52A @ 24VDC  
 Input Current (max): 580mA @120 VAC/300mA @ 124VDC  
 BTU/hr: 125 @ 24VDC  
 BTU/hr: 268 @ 120VAC/127 @ 124VDC

## CONNECTORS

10/100/1000BaseT(X): Up to sixteen (16) RJ45 copper ports  
 100BaseFX: Up to sixteen (16) SC or ST fiber ports  
 1000BaseGX: Up to sixteen (16) SC fiber ports  
 100BaseSX/LX SFP: Up to sixteen (16) LC fiber ports  
 1000BaseSX/LX SFP: Up to sixteen (16) LC fiber ports

## RELIABILITY

MTBF: >1 million hours


## NETWORK MEDIA

10BaseT:  $\geq$ Cat3 cable  
 100BaseTX:  $\geq$ Cat5 cable  
 1000BaseT:  $\geq$ Cat5 cable  
 100BaseFX, 1000BaseSX Multimode: 50-62.5/125 $\mu$ m  
 100BaseFX, 1000BaseLX Singlmode: 7-10/125 $\mu$ m

## RECOMMENDED WIRING CLEARANCE

Front and Top: 4" (10.2 cm)

## DIMENSIONS

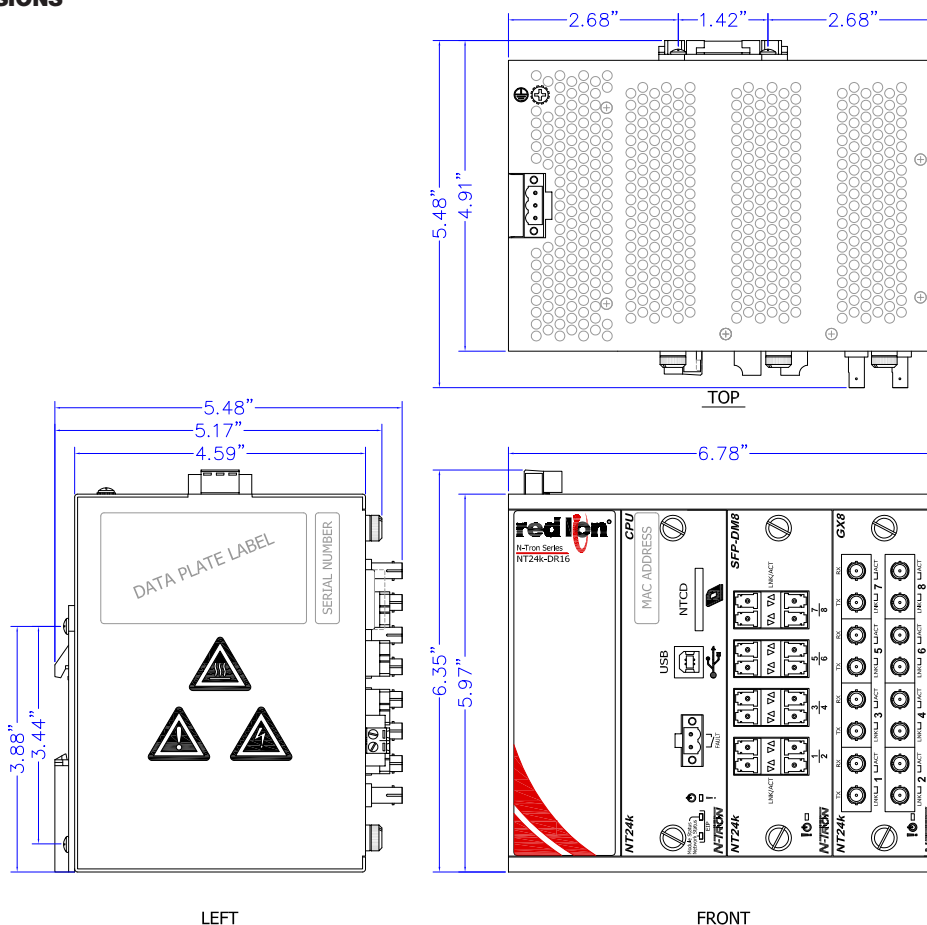

## CERTIFICATION & COMPLIANCE

Product Safety:  
 ANSI/ISA 12.12.01-2013 Class I and II, Div. 2 and Class III, Div. 1 and 2, Groups A, B, C and D Hazardous Locations  
 UL508 Industrial Control Equipment  
 CAN/CSA-C22.2 No. 213-M1987 Class I Div. 2 Hazardous Locations  
 CAN/CSA-C22.2 No. 14-M1987 Industrial Control Equipment  
 Emissions:  
 FCC Title 47, Part 15, Radio Frequency Devices, Subpart B ANSI C63.4-2009; Industry Canada ICES-003, EN 55011; EN 61000-6-4, EN 61000-3-2, EN61000-3-3, EN 55032  
 Immunity:  
 EN 55024, EN 61000-6-2; IEC 61000-4-2 (ESD); IEC 61000-4-3 (RFAM); IEC 61000-4-4 (EFT); IEC 61000-4-5 (SURGE); IEC 61000-4-6 (RFM); IEC 61000-4-8 (PFMF); IEC 61000-4-11 (VDI)  
 Other:  
 ABS Type Approval for Shipboard Applications; EMC Directive 2014/30/EU; LV Directive 2014/35/EU GOST-R, RoHS Compliant

## ENVIRONMENTAL

Operating Temperature: -40° C to 75° C  
 Operating Humidity: 5% to 95% (Non Condensing)  
 Operating Altitude: 0 to 10,000 ft.  
 Shock: 50g @ 10ms  
 Vibration/Seismic: 30g, 10-200 Hz, triaxial

## MECHANICAL

Case Dimensions  
 Height: 5.97" (15.20 cm)  
 Width: 6.78" (17.22 cm)  
 Depth: 4.59" (11.65 cm)  
 Weight (maximum): 6.4 lbs (2.9 kg)  
 Mount: DIN rail

# Managed Gigabit Industrial Ethernet Switch Specifications

## NT24K-FX8 MODULE - 100 MB FIBER TRANSCEIVER CHARACTERISTICS

Fiber Mode	MM	SM	SM	SM
Fiber Length*	2km	15km	40km	80km
TX Power Min	-19 dBm	-15 dBm	-5 dBm	-5 dBm
RX Sensitivity Max	-31 dBm	-31 dBm	-34 dBm	-34 dBm
Wavelength	1310 nm	1310 nm	1310 nm	1550 nm

## NT24K-GX8 MODULE - GIGABIT FIBER TRANSCEIVER CHARACTERISTICS

Fiber Mode	MM	SM	SM	SM
Fiber Length*	550m @ 50/125µm 300m @ 62.5/125µm	10km	40km	80km
TX Power Min	-9.5 dBm	-9.5 dBm	-5 dBm	0 dBm
RX Sensitivity Max	-17 dBm	-20 dBm	-23 dBm	-24 dBm
Wavelength	850 nm	1310 nm	1310 nm	1550 nm
Laser Type	VCSEL	FP	DFB	DFB

## NT24K-SFP-DM8 MODULE - SFP 100BASE FIBER TRANSCEIVER CHARACTERISTICS

Fiber Mode	MM	SM	SM	SM
Fiber Length*	2km	15km	40km	80km
TX Power Min	-19 dBm	-15 dBm	-5 dBm	-5 dBm
RX Sensitivity Max	-31 dBm	-34 dBm	-34 dBm	-34 dBm
Wavelength	1310 nm	1310 nm	1310 nm	1550 nm
Laser Type	FP	FP	FP	DFB

## NT24K-SFP-DM8 OR NT24K-SFP8 MODULES- SFP GIGABIT FIBER TRANSCEIVER CHARACTERISTICS

Fiber Mode	MM	SM	SM	SM
Fiber Length*	550m @ 50/125µm 275m @ 62.5/125µm	10km	40km	80km
TX Power Min	-9.5 dBm	-9.5 dBm	-2 dBm	0 dBm
RX Sensitivity Max	-17 dBm	-20 dBm	-22 dBm	-24 dBm
Wavelength	850 nm	1310 nm	1310 nm	1550 nm
Laser Type	VCSEL	FP	DFB	DFB

\* Fiber Length distances represent typical performance. Link budgets should be evaluated based on specific application conditions.

## ORDERING GUIDE

PART NUMBER	DESCRIPTION
NT24K-DR16-DC	Managed Industrial Ethernet Switch; modular DIN rail design with 2 expansion slots; redundant 18-49VDC power input
NT24K-DR16-DC-PT	Managed Industrial Ethernet Switch; modular DIN rail design with 2 expansion slots; redundant 18-49VDC power input PTP Enabled
NT24K-DR16-AC	Managed Industrial Ethernet Switch; modular DIN rail design with 2 expansion slots; 90-264VAC / 90-300VDC power inputs
NT24K-DR16-AC-PT	Managed Industrial Ethernet Switch; modular DIN rail design with 2 expansion slots; 90-264VAC / 90-300VDC power inputs PTP Enabled
NT24K-FP	Filler panel (required to fill vacant module slots)
NTCD-CFG	Configuration recovery device
NTPC-AC-US	AC power cord
NTPS-24-3	DIN rail power supply 3.0 Amp@24 VDC
NT24K-DR-PMK	NT24k DR panel mount kit
NT24K-KIT-PTP	NT24k Upgrade License to Enable IEEE 1588/PTP on Non-PT NT24k Switches
PORT MODULES & TRANSCEIVERS	
NT24K-TX8	8-port 10/100/1000BaseT module
NT24K-FX8-XX	Slide-in module with 8 100BaseFX multimode fiber ports, 2km (SC or ST)
NT24K-FXE8-XX-YY	Slide-in module with 8 100BaseFX singlemode fiber ports (SC or ST)
NT24K-GX8-SC	Slide-in module with 8 1000BaseFX multimode fiber ports, 550m (SC)
NT24K-GXE8-SC-ZZ	Slide-in module with 8 1000BaseFX singlemode fiber ports (SC)
NT24K-SFP8	Slide-in module with 8 SFP expansion slots; supports 1000Base SFP transceivers*
NT24K-SFP-DM8	Slide-in module with 8 dual mode SFP expansion slots; supports 100Base or 1000Base SFP transceivers*
NTSFP-FX	100BaseFX multimode fiber SFP pluggable mini-GBIC transceiver (LC style connector, 2km)**
NTSFP-FXE-YY	100BaseFX singlemode fiber SFP pluggable mini-GBIC transceiver (LC style connector)**
NTSFP-TX	1000BaseT copper SFP pluggable mini-GBIC transceiver
NTSFP-SX	1000BaseSX multimode fiber SFP pluggable mini-GBIC transceiver
NTSFP-LX-ZZ	1000BaseLX singlemode fiber SFP pluggable mini-GBIC transceiver

Where: XX = ST or SC connector (ST not available on some GX modules); YY = 15, 40, or 80 for FX singlemode, blank for multimode; ZZ = 10, 40, or 80 for GX singlemode; \*SFP transceivers sold separately; \*\*For use with SFP DM8 module only



**Americas**  
sales@redlion.net

**Asia-Pacific**  
asia@redlion.net

**Europe  
Middle East  
Africa**  
europe@redlion.net  
+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our award-winning technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. For more information, please visit [www.redlion.net](http://www.redlion.net). Red Lion is a Spectris company.

ADLD0332 0601119 © 2019 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.