


Chip Monolithic Ceramic Capacitor

Electrical Characteristics Data

0805 X7R 33nF 50V(0805B333K500CT)

1. Dimension



Size Inch (mm)	L (mm)	W (mm)	T (mm)
0805(2012)	2.00±0.15	1.25±0.10	0.80±0.10


2. Cap, DF, IR @25°C

(Cap, DF @1KHz, 1Vrms ; IR @50V, 120sec)

Item	Spec
Cap [nF]	33(±10%)
DF	≤ 2.5%
IR [G-ohm]	> 10


3. Impedance/ESR-Frequency

(Equipment: 4294A)

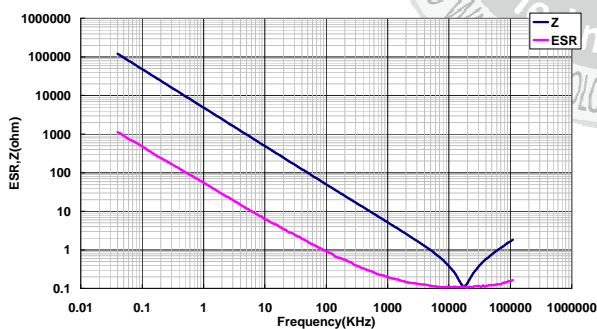

4. Capacitance – Temperature Characteristics


(Equipment: 4284A)

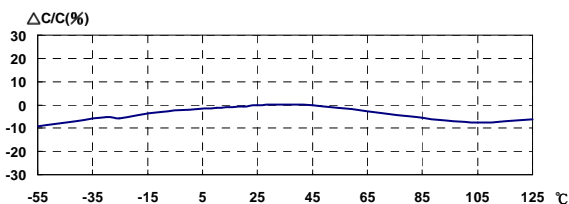

5. Capacitance – DC Voltage Characteristics

(Equipment: 4284A; DC charge 60±5sec)

24V : 11.52% ; 50V : -42.36%

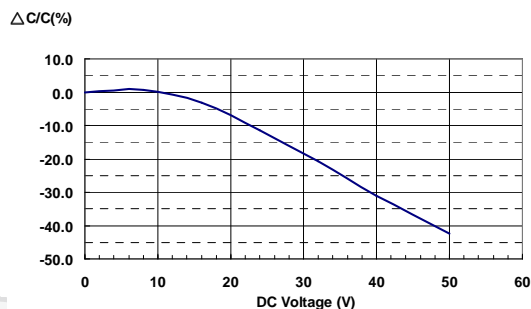

6. Capacitance – AC Voltage Characteristics

(Equipment: 4284A)

