

General Description

The SN74AHCT1G08 device is a single 2-input positive-AND gate. The device performs the Boolean function $Y = A \cdot B$ or $Y = \overline{A + B}$ in positive logic. Low I_{CC} current allows this device to be used in power-sensitive or battery-powered applications.

Features

- Operating Range: 4.5 V to 5.5 V
- Maximum tpd of 7.1 ns at 5 V
- Low Power Consumption: Maximum I_{CC} of 10 μ A
- ± 8 mA Output Drive at 5 V
- Inputs are TTL-Voltage Compatible
- Packages are SC70-5, SOT23-5 or small DFN6
- MSL3(SC70-5, SOT23-5, DFN6(1*1.5))

Pin Configuration

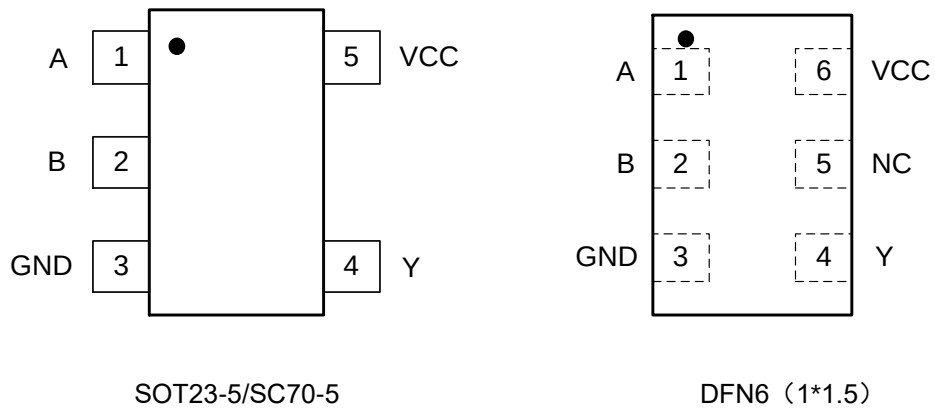


Figure1. Top View

Pin Function

SC70-5/ SOT23-5

Pin No.	Pin Name	Function
1	A	Input A
2	B	Input B
3	GND	Ground
4	Y	Output
5	VCC	Supply Voltage

DFN6

Pin No.	Pin Name	Function
1	A	Input A
2	B	Input B
3	GND	Ground
4	Y	Output
5	NC	No connect
6	VCC	Supply Voltage

Block Diagram




Figure2. Logic Symbol

Functional Description

Function Table

Input		Output
A	B	Y
L	L	L
L	H	L
H	L	L
H	H	H

Absolute Maximum Ratings

Symbol	Parameter		Value	Unit
V_{CC}	DC Supply Voltage		-0.5 to 7.0	V
V_I	DC Input Voltage ⁽¹⁾		$-0.5 \leq V_I \leq +7.0$	V
V_O	DC Output Voltage Output in Higher or Low State		-0.5 to $V_{CC} + 0.5$	V
I_{IK}	DC Input Diode Current	$V_I < GND$	-20	mA
I_{OK}	DC Output Diode Current	$V_O < GND, V_O > V_{CC}$	± 20	mA
I_O	DC Output Sink Current		± 25	mA
I_{CC}	DC Supply Current per Supply Pin		± 50	mA
I_{GND}	DC Ground Current per Supply Pin		± 50	mA
T_{STG}	Storage Temperature Range		-65 to 150	°C
T_L	Lead Temperature, 1 mm from Case for 10 Seconds		260	°C
T_J	Junction Temperature Under Bias		150	°C
V_{ESD}	ESD Classification	Human Body Model ⁽²⁾	± 4000	V
		Charged Device Model ⁽³⁾	± 1000	
I_{LU}	Latch-up Current Above V_{CC} and GND at 125°C ⁽⁴⁾		± 100	mA

Thermal Characteristics

Symbol	Package	Ratings	Value	Unit
$R_{\theta JA}$	SC70-5	Thermal Characteristics, Thermal Resistance, Junction-to-Air	300	°C/W
	SOT23-5		250	
	DFN6(1.0×1.5)		440	
$R_{\theta JB}$	SC70-5	Thermal Characteristics, Thermal Resistance, Junction-to-board	75	°C/W
	SOT23-5		65	
	DFN6(1.0×1.5)		270	
P_D	SC70-5	Power Dissipation in Still Air at 85°C	215	mW
	SOT23-5		260	
	DFN6(1.0×1.5)		150	

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V_{CC}	Supply Voltage	4.5	5.5	V
V_{IH}	High-level Input Voltage	2		V
V_{IL}	Low-level Input Voltage		0.8	V
V_I	Input Voltage	0	5.5	V
V_O	Output Voltage	0	V_{CC}	V
I_{OH}	High-level Output Current		-8	mA
I_{OL}	Low-level Output Current		8	mA
$\Delta t/\Delta v$	Input Transition Rise and Fall Rate		20	ns/V
T_A	Operating Temperature Range	-40	125	°C

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied.

Electrical Characteristics

DC Electrical Characteristics

Symbol	Parameter	Condition	$V_{CC}(V)$	$T_A=25^{\circ}C$			$-40^{\circ}C \leq T_A \leq 125^{\circ}C$		Unit
				Min	Typ	Max	Min	Max	
V_{OH}	High-Level Output Voltage	$I_{OH}=-50\mu A$	4.5	4.4	4.5		4.4		V
		$I_{OH}=-8mA$	4.5	3.94			3.8		
V_{OL}	Low-Level Output Voltage	$I_{OL}=50\mu A$	4.5			0.1		0.1	V
		$I_{OL}=8mA$	4.5			0.36		0.44	
I_I	Input Current	$V_{IN} = 5.5V$ or GND	0 to 5.5			± 0.1		± 1	μA
I_{CC}	Supply Current	$V_{IN} = V_{CC}$ or GND, $I_O = 0$	5.5			1.0		10	μA
$\Delta I_{CC}^{(5)}$	Change in Supply Current	One input at 3.4 V, Other Inputs at V_{CC} or GND	5.5			1.35		1.5	mA
C_i	Input Capacitance	$V_{IN} = V_{CC}$ or GND	5		3	10			pF

Note5: This is the increase in supply current for each input at one of the specified TTL voltage levels, rather than 0 V or V_{CC} .

Switching Characteristics

Over recommended operating free-air temperature range, $V_{CC} = 5V \pm 0.5V$ (unless otherwise noted)
(see Figure 3)

Symbol	Parameter	Condition	$T_A = 25^\circ\text{C}$			$-40^\circ\text{C} \leq T_A \leq 85^\circ\text{C}$		$-40^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$		Unit
			Min	Typ	Max	Min	Max	Min	Max	
t_{PLH}	Propagation Delay	$C_L = 15\text{pF}$		2.5	6.2	1	7.1	1	7.5	ns
t_{PHL}		$C_L = 15\text{pF}$		4.5	6.8	1	7.1	1	7.5	ns
t_{PLH}		$C_L = 50\text{pF}$		3.0	7.9	1	9	1	10	ns
t_{PHL}		$C_L = 50\text{pF}$		5.5	8.3	1	9	1	10	ns


Operating Characteristics

$V_{CC} = 5\text{ V}$, $T_A = 25^\circ\text{C}$

Symbol	Parameter	Condition	Typ	Unit
C_{PD}	Power Dissipation Capacitance ⁽⁶⁾	No load, $f = 1\text{ MHz}$	12	pF

Note6: C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation: $I_{CC(OPR)} = C_{PD} \times V_{CC} \times f_{in} + I_{CC} \times C_{PD}$ is used to determine the no-load dynamic power consumption; $P_D = C_{PD} \times V_{CC}^2 \times f_{in} + I_{CC} \times V_{CC} \times Fig.$

Waveform and Test Circuit

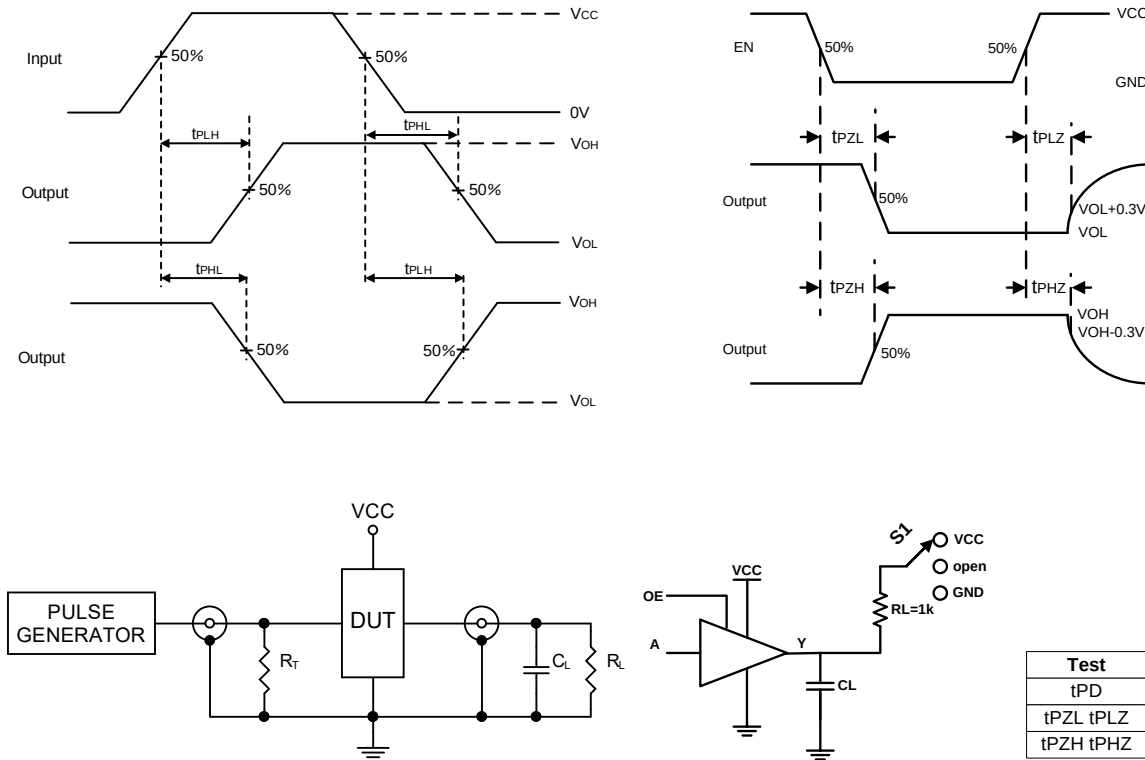

C_L includes probe and jig capacitance

All input pulses are supplied by generators having the following characteristics: $PRR \leq 1\text{MHz}$, $Z_o = 50\Omega$, $t_r \leq 3\text{ns}$, $t_f \leq 3\text{ns}$.


The outputs are measured one at a time with one input transition per measurement.

All parameters and waveforms are not applicable to all devices.

Figure3. Load Circuit and Voltage Waveforms

Package Dimension


SC70-5

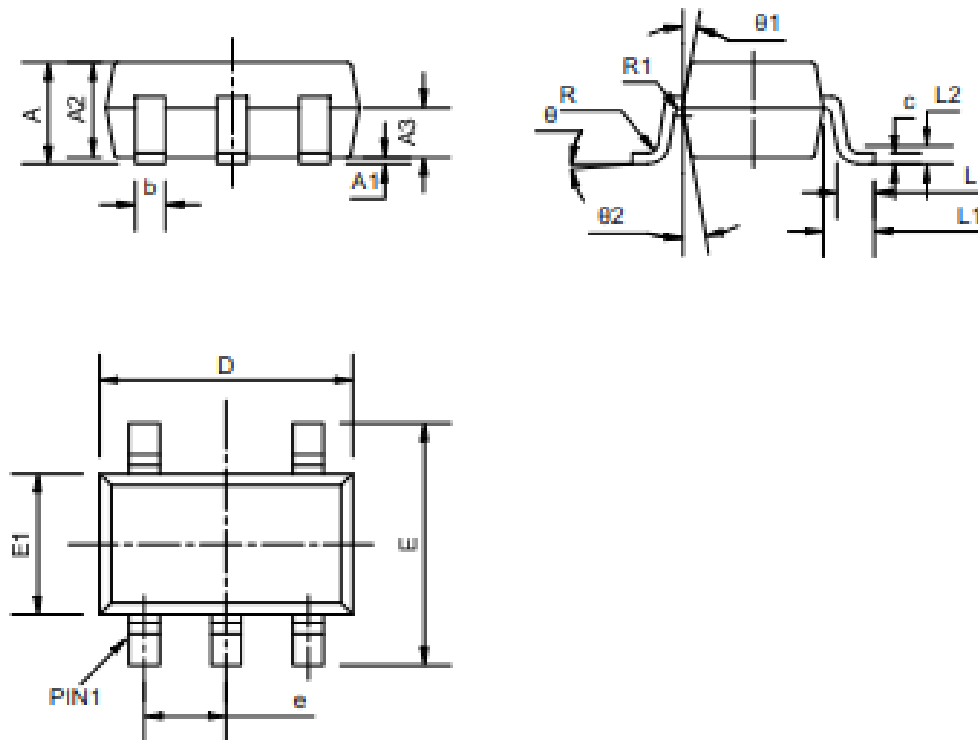

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.85	—	1.05
A1	0	—	0.10
A2	0.80	0.90	1.00
A3	0.47	0.52	0.57
b	0.23	—	0.33
c	0.12	—	0.18
D	2.02	2.07	2.12
E	2.20	2.30	2.40
E1	1.25	1.30	1.35
e	0.60	0.65	0.70
L	0.28	0.33	0.38
L1	0.50REF		
L2	0.15BSC		
R	0.10	—	—
R1	0.10	—	0.25
θ	0°	—	8°
θ1	6°	9°	12°
θ2	6°	9°	12°


SOT23-5

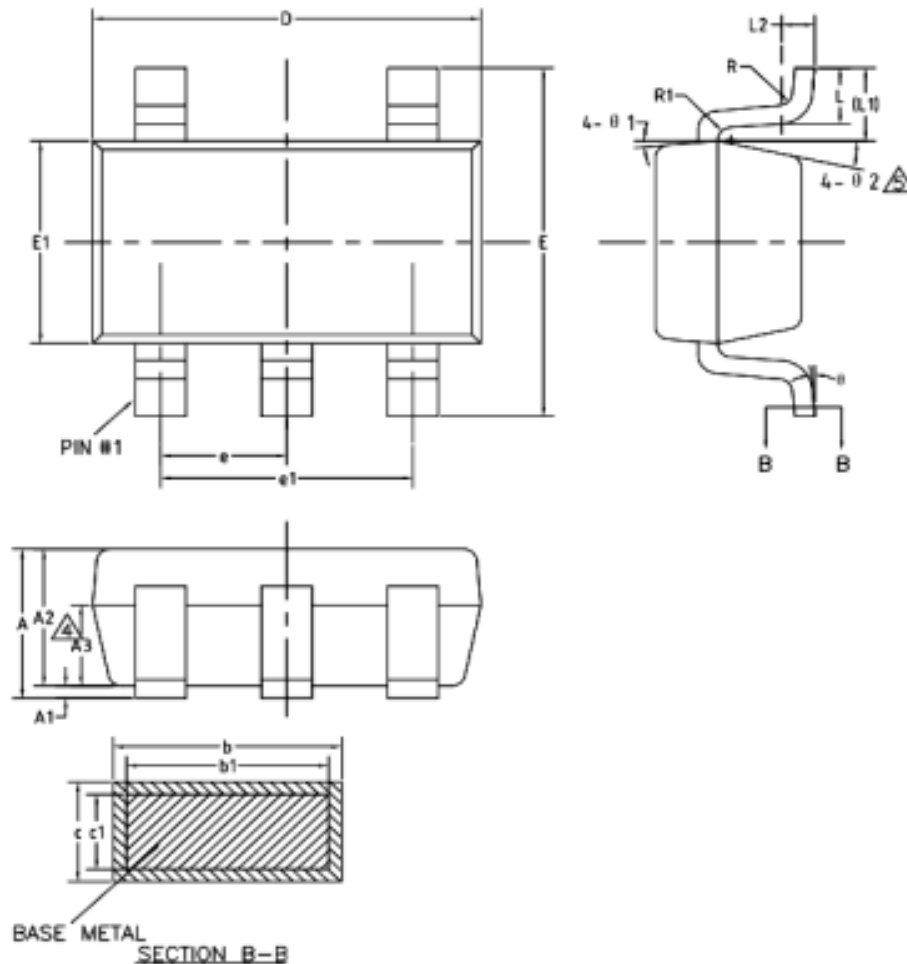

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	—	—	1.25
A1	0	—	0.15
A2	1.00	1.10	1.20
A3	0.60	0.65	0.70
b	0.36	—	0.50
b1	0.36	0.38	0.45
c	0.14	—	0.20
c1	0.14	0.15	0.16
D	2.826	2.926	3.026
E	2.60	2.80	3.00
E1	1.526	1.626	1.726
e	0.90	0.95	1.00
e1	1.80	1.90	2.00
L	0.35	0.45	0.60
L1	0.59REF		
L2	0.25BSC		
R	0.10	—	—
R1	0.10	—	0.25
Ø	0°	—	8°
Ø 1	3°	5°	7°
Ø 2	6°	—	14°

DFN6(1×1.5)

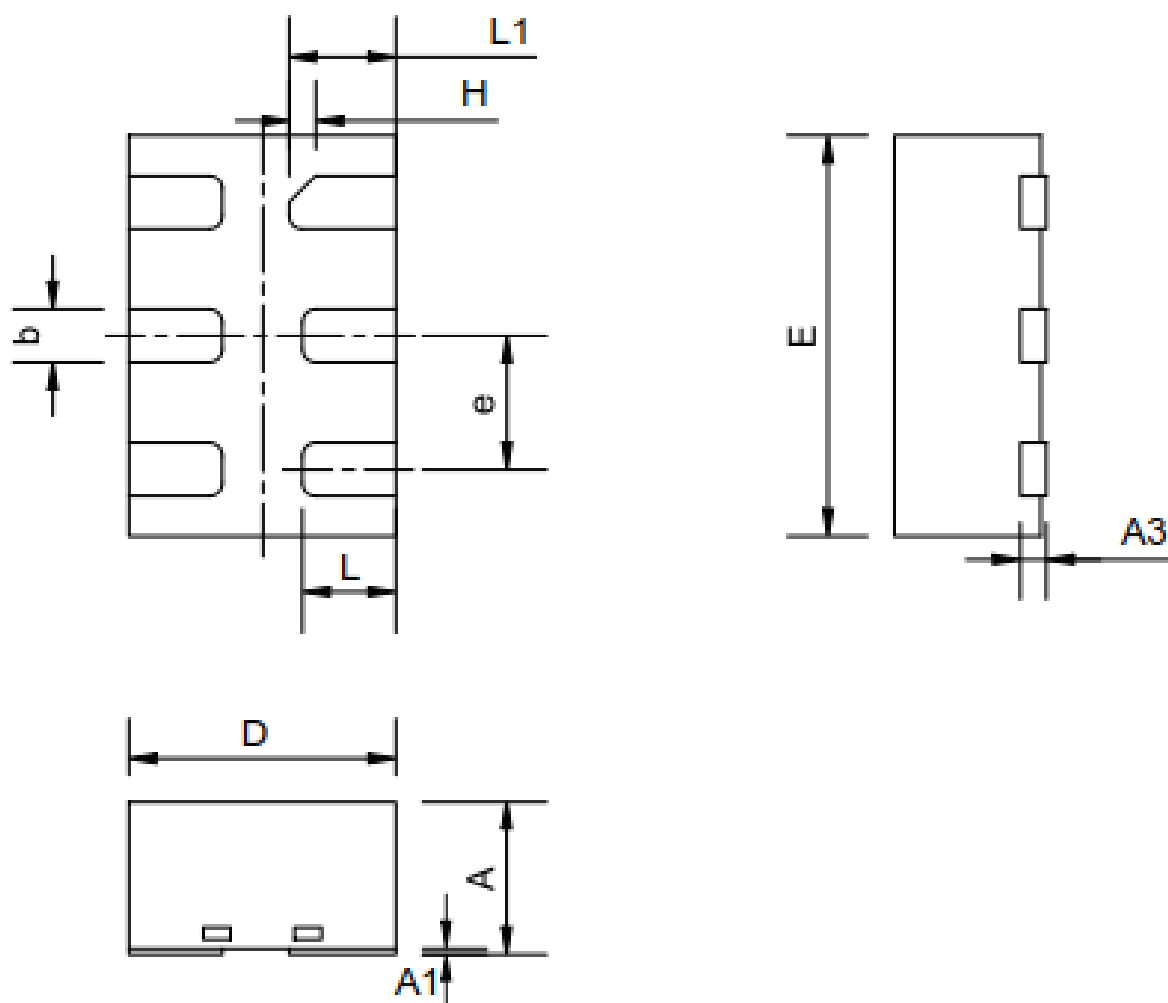

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.50	—	0.60
A1	0	0.02	0.05
A3	0.10REF		
b	0.15	0.20	0.25
D	0.90	1.00	1.10
E	1.40	1.50	1.60
e	0.40	0.50	0.60
H	0.10REF		
L	0.30	0.35	0.40
L1	0.35	0.40	0.45

Ordering information

Order code	Marking code	Package	Baseqty	Deliverymode
UMW SN74AHCT1G08DBVR	B08S U	SOT23-5	3000	Tape and reel
UMW SN74AHCT1G08DCKR	BEG U	SC70-5	3000	Tape and reel
UMW SN74AHCT1G08DRYR	—	DFN6 (1*1.5)	5000	Tape and reel