Downloaded from Arrow.com.

DIMENSIONS mm (inches)

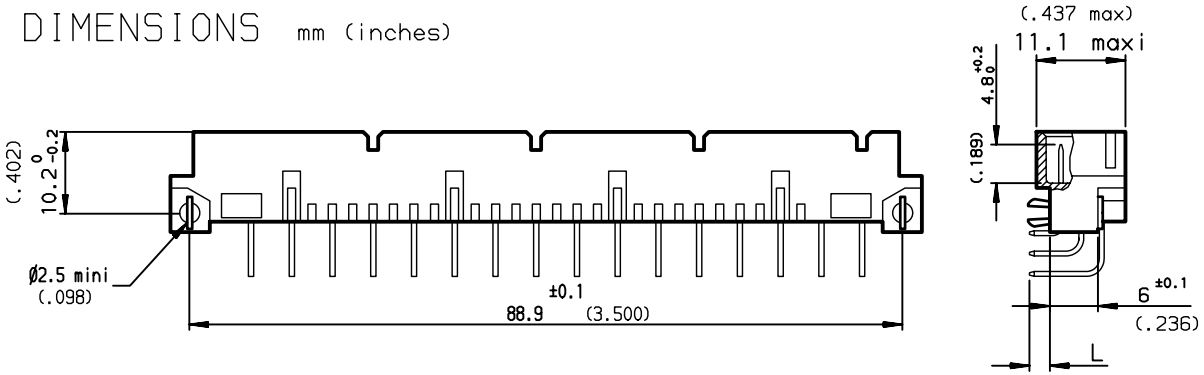

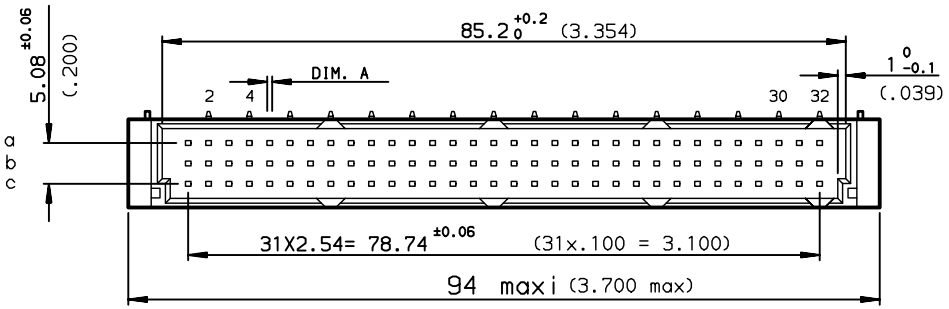

PCB DRILLING

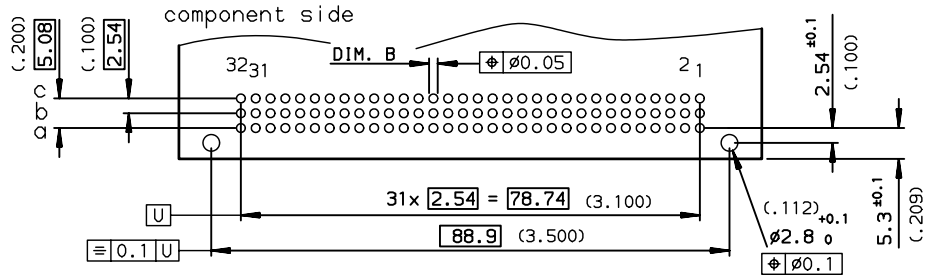

PART NUMBER	8609		71			8	
PIN OUT							
rows a-b-c		3		48			
rows a-c		4		32			
NUMBER OF CONTACTS							
TERMINATION							
L = 2.75 ±0.15 (.108)	A = Ø0.6 0 -0.08	B = Ø0.8 0 +0.3			13		
L = 4.15 ±0.15 (.163)	A = 0.6X0.6	B = ø1±0.1			23		
OPTIONS							
no option						7	
with harpoons	for PCB thickness 1.6 mm					H	
PERFORMANCE CLASS							
DIN 41612 class 3						4	
DIN 41612 class 2						5	
DIN 41612 class 1						6	
TERMINATION TYPE							
TIN LEAD							000E1
LEAD FREE							E1LF

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:

SEE DRAWING C-8609-0000A

European Views

rev	ecn no	dr	date
A	-	-	1997/10/27
B	LS05-001	JTA	2005/03/02
C	LS06-0095	LGO	2006/07/21
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com

surface ISO 1302 | tolerance std ISO 406 ISO 1101 | projection | mm

TOLERANCES UNLESS OTHERWISE SPECIFIED

Dr	ROUILLARD	1997/10/27	ANGULAR	LINEAR	0.X	±0.1
Eng	TARON	1997/10/27			0.XX	±0.1
Chr	LEGARE	1997/10/27	0.XX° ±2°		0.XXX	±0.1
Appr	LEGARE	1997/10/27	Product family		DIN 8609	

size A3 | Scale 1.5 | ECN LS06-0095 | Spec ref -

title: RIGHT ANGLE MALE - STYLE C
SOLDER TO BOARD

dwg no C-8609-0631 | Rev. C

catalog no - | CUSTOMER | sheet 1 of 1

REV F - 2006-04-17

PDM: Rev:C STATUS: Released Printed: May 14, 2011

Copyright FCI.