

Aluminum Electrolytic Capacitor –JNE


STANDARD RATINGS

capacitance	Working Voltage	tolerance	dimension	P	Ripple current 105C at 120Hz
(μF)	(V.DC)	(%)	(mm)	(mm)	(Arms)
330	450	+/-20%	30*45	10	1.15
330	400	+/-20%	30*40	10	0.95

SPECIFICATIONS

Items	Performance Characteristics			
Operating Temperature Range (°C)	-25°C ~ +105°C			
Voltage Range (V)	450,400			
Capacitance Range (μF)	330			
Capacitance Tolerance (25°C, 120Hz)	±20%			
Leakage Current (μA)	0.01CV or 1.5mA whichever is smaller. (at 25°C, after 5 minutes) C:Nominal capacitance (μF) V: Rated Voltage (V)			
Dissipation Factor (25°C, 120Hz)	Rated Voltage (V)	450,400		
	Tan δ (max)	0.15		
Temperature Stability (120Hz)	Rated Voltage (V)	450	400	
	Impedance Ratio	Z-25°C/Z+20°C	4	4
		Z-40°C/Z+20°C	--	--
Load Life (+105°C)	Time	2000hours		
	Leakage Current	Not more than the specified value		
	Capacitance Change	Within ± 20% of the initial value		
	Dissipation Factor	Not more than 200% of the specified value		
Shelf Life (+105°C)	500hrs, No voltage applied. After test: U _R to be applied for 60 minutes, 24 to 48 hours before measurement.			

DIMENSIONS (mm)

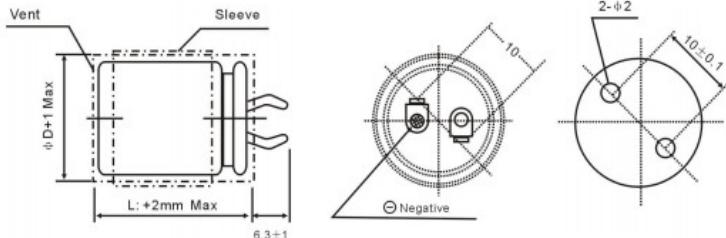

MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

Frequency(Hz)	50	120	1K	10K	20K
Rated Voltage(V)					
450, 400	0.90	1	1.20	1.50	1.55

Temperature coefficient:

Temperature(°C)	+40	+55	+70	+85	+105
Factor	2.7	2.5	2.1	1.7	1

Please visit our website to get more update data, those data & specification are subject to change without notice.