



Request a quote



Ultimaker 2+ Connect Air Manager Product data sheet

Improved air quality, safer workplace

The Ultimaker 2+ Connect Air Manager ensures a safer working environment, providing a closed, inside-out airflow for the Ultimaker 2+ Connect 3D printer. It filters up to 95% of all ultrafine particles (UFPs) emitted during 3D printing and forms a safe, physical barrier to the print area.

More materials, less hassle

Optimized software profiles precisely control filtering for every Ultimaker material and over 40 third-party filaments. So you can focus on creating the perfect 3D printed part with any material you choose. No worries about UFPs, and no extra time configuring your printer.

Key features

- ✓ **EPA filter:** Removes up to 95% of UFPs
- ✓ **Controlled extraction:** Inside-out airflow optimized for filtering and print quality
- ✓ **Enhanced safety:** Physical barrier prevents reaching inside the printer
- ✓ **Optimized for your application:** Detects material being used and adjusts airflow
- ✓ **Easy setup:** Printer detects when the Air Manager is connected
- ✓ **Smart monitoring:** Printer tracks filter usage and prompts replacement

Why choose Ultimaker



3D printers that simply work

Our award-winning 3D printers are robust, reliable, and easy to use. They deliver quality parts time and again. Designed and tested to run 24/7, they allow you to achieve the results you need more quickly and easily.



Software ready for Industry 4.0

Trusted by millions of users across 14 languages, Ultimaker Cura integrates with any workflow through Ultimaker Marketplace plugins. Then scale production and digital distribution with Ultimaker Digital Factory.



Material choice like never before

Ultimaker offers the widest material choice on the market. With an open filament system, you can always find the right material properties for your application – from heat, chemical, or wear resistance to flexibility.




Support dedicated to your success

Wherever you are in the world, Ultimaker support is close by. Our global network of service partners offer professional installation, training, and maintenance in your language and time zone.

Request a quote today at ultimaker.com/quote/request

Ultimaker

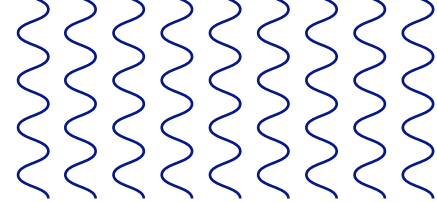

Ultimaker 2+ Connect Air Manager specifications


Properties	Filter technology	EPA filter
	Fan technology	Air extraction by low-noise brushless fan
	Air refresh rate	1 - 50 m³/h (35 m³/h nominal rate for most materials at 23°C)
	Filter efficiency	Up to 95%
	Filter replacement	Recommended every 1,500 print hour (approx.1 year)
	Operating sound	< 51 dBA (including Ultimaker 2+ Connect)
	Connection (data and power)	UMB connection (included)
	Compatible 3D printers	Ultimaker 2+ Connect
	Compatible materials	Optimized for Ultimaker PLA, Tough PLA, ABS, Nylon, CPE, CPE+, PC, PP, TPU 95A, PVA, Breakaway (Also supports third-party materials)
Physical dimensions	Dimensions	320 x 450 x 260 mm (12.5 x 17.7 x 10.2 in)
	Dimensions (including Ultimaker 2+ Connect)	320 x 450 x 630 mm (12.5 x 17.7 x 24.8 in)
	Net weight	4 kg (8.8lbs)
Software	Supplied software	Ultimaker Cura, print preparation software Ultimaker Digital Factory, cloud-based printer management solution
	Warranty Period	12 month

Compatible products



Ultimaker 2+ Connect

Ultimaker 2+ Connect 3D printer is required for use




Ultimaker materials

Compatible with the full Ultimaker material range



Third-party materials

Use with any other material, including composites



Ultimaker Essentials

Software subscription that delivers stability and control for organizations

Compatible materials

Unlock a wide range of applications with complete material choice. Use Ultimaker materials, any third-party filament, or access material profiles from leading brands. Choose from these materials and more.

Easy to print and visual quality

- Ultimaker PLA
- Ultimaker Tough PLA

Mechanical strength

- Ultimaker ABS
- Ultimaker PC
- Ultimaker CPE

Wear resistance

- Ultimaker Nylon
- Ultimaker PP
- Igus Iglidur I180-PF

Heat resistance

- Ultimaker CPE+
- DSM Arnitel ID 2060 HT

Flexibility

- Ultimaker TPU 95A
- DuPont™ Hytrel® 3D4100FL

Reinforced composites

- Owens Corning XSTRAND™ GF30-PA6
- DSM Novamid® ID1030 CF10

Support

- Ultimaker PVA
- Ultimaker Breakaway