


# RF/Microwave Capacitors

## RF/Microwave Multilayer Capacitors (MLC)

### 700B Series NPO Porcelain and Ceramic Multilayer Capacitors



#### FEATURES

- Case B Size (.110" x .110")
- Capacitance Range 0.1 pF to 5100 pF
- Extended WVDC up to 1500 VDC
- Low ESR/ESL
- High Q
- Low Noise
- Ultra-Stable Performance
- High Self-Resonance
- Established Reliability (QPL)

#### GENERAL DESCRIPTION

KYOCERA AVX, the industry leader, is announcing new improved ESR/ESL performance for the 700B Series RF/Microwave Capacitors. The superior high self-resonance and zero TCC characteristic of this Series provide excellent performance over a broad range of RF and microwave applications requiring minimum drift, including RF power. Porcelain and ceramic construction provide a rugged, hermetic package.

#### FUNCTIONAL APPLICATIONS

- Bypass
- Impedance Matching
- Coupling
- DC Blocking
- Tuning

#### CIRCUIT APPLICATIONS

- Timing Power Amplifiers
- RF Power Amplifiers
- Filters
- Oscillators

#### ENVIRONMENTAL CHARACTERISTICS

<b>Thermal Shock</b>	Mil-STD-202, Method 107, Condition A
<b>Moisture Resistance</b>	Mil-STD-202, Method 106
<b>Low Voltage Humidity</b>	Mil-STD-202, Method 103, condition A, with 1.5 VDC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours
<b>Life Test</b>	MIL-STD-202, Method 108, for 2000 hours, at 125°C. Voltage applied. 200% of WVDC for capacitors rated at 500 volts DC or less. 120% of WVDC for capacitors rated at 1250 volts DC or less. 100% of WVDC for capacitors rated above 1250 volts DC
<b>Termination Styles</b>	Available in various surface mount and leaded styles. See Mechanical Configurations
<b>Terminal Strength</b>	Terminations for chips and pellets withstand a pull of 5 lbs. min., 15 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor.

AVX 700B Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

#### PACKAGING OPTIONS



Tape & Reel



Vertical Orientation Tape & Reel



Cap Pac® (100 pcs)



#### ELECTRICAL SPECIFICATIONS

<b>Temperature Coefficient (TCC)</b>	0 ±30 PPM/°C (-55°C to +125°C)
<b>Capacitance Range</b>	0.1 pF to 5100 pF
<b>Operating Temperature</b>	0.1 to 200 pF: from -55°C to +175°C 220 to 5100 pF: from -55°C to +125°C
<b>Quality Factor</b>	Greater than 10,000 (1 pF to 200 pF) @ 1 MHz. Greater than 2000 (220 pF to 1000 pF) @ 1 MHz. Greater than 2000 (1100 pF to 5100 pF) @ 1 KHz.
<b>Insulation Resistance (IR)</b>	0.1 pF to 470 pF: 10 <sup>6</sup> Megohms min. @ +25°C at rated WVDC. 10 <sup>5</sup> Megohms min. @ +125°C at rated WVDC. 510 pF to 5100 pF: 10 <sup>5</sup> Megohms min. @ +25°C at rated WVDC. 10 <sup>4</sup> Megohms min. @ +125°C at rated WVDC.
<b>Working Voltage (WVDC)</b>	See Capacitance Values table
<b>Dielectric Withstanding Voltage (DWV)</b>	250% of WVDC for capacitors rated at 500 volts DC or less for 5 seconds. 150% of WVDC for capacitors rated at 1250 volts DC or less for 5 seconds. 120% of WVDC for capacitors rated above 1250 Volts DC for 5 seconds
<b>Aging Effects</b>	None
<b>Piezoelectric Effects</b>	None
<b>Capacitance Drift</b>	± (0.02% or 0.02 pF), whichever is greater
<b>Retrace</b>	Less than ±(0.02% or 0.02 pF), whichever is greater.

# RF/Microwave Capacitors

## RF/Microwave Multilayer Capacitors (MLC)

### 700B Series NPO Porcelain and Ceramic Multilayer Capacitors




## CAPACITANCE VALUES

Cap. Code	Cap. (pF)	Tol.	Rated WVDC		Cap. Code	Cap. (pF)	Tol.	Rated WVDC		Cap. Code	Cap. (pF)	Tol.	Rated WVDC		CAP. CODE	CAP. (pF)	TOL.	RATED WVDC																						
			STD.	EXT.				STD.	EXT.				STD.	EXT.				STD.	EXT.																					
0R1	0.1	B	500	1500	3R3	3.3	B, C, D	500	1500	330	33	F, G, J, K, M	500	1500	331	330	F, G, J, K, M	200																						
0R2	0.2				3R6	3.6				360	36					361				360																				
0R3	0.3	B, C			EXTENDED VOLTAGE	3R9				3.9	EXTENDED VOLTAGE					500				1500	390	39	EXTENDED VOLTAGE	1500	391	390														
0R4	0.4					4R3				4.3											430	43				431	430													
0R5	0.5	B, C, D				EXTENDED VOLTAGE				4R7											4.7	EXTENDED VOLTAGE				500	1500	470	47	EXTENDED VOLTAGE	1500	471	470							
0R6	0.6									5R1											5.1							510	51			511	510							
0R7	0.7									5R6											5.6							560	56			561	560							
0R8	0.8									6R2											6.2							620	62			621	620							
0R9	0.9									B, C, J, K, M											EXTENDED VOLTAGE							6R8	6.8			EXTENDED VOLTAGE	500	1500	680	68	EXTENDED VOLTAGE	1500	681	680
1R0	1.0																											7R5	7.5						750	75			751	750
1R1	1.1		8R2	8.2			820	82	821			820																												
1R2	1.2		9R1	9.1			910	91	911			910																												
1R3	1.3		B, C, D	EXTENDED VOLTAGE	100		10	EXTENDED VOLTAGE	500		1500	102	1000	EXTENDED VOLTAGE	1500	102	1000																							
1R4	1.4				110		11					111	110			112	1100																							
1R5	1.5	120			12	121	120					122	1200																											
1R6	1.6	130			13	131	130					152	1500																											
1R7	1.7	150			15	151	150					182	1800																											
1R8	1.8	F, G, J, K, M			EXTENDED VOLTAGE	160	16					EXTENDED VOLTAGE	300			1000	161	160	EXTENDED VOLTAGE	1500		222	2200																	
1R9	1.9					180	18			181							180	272			2700																			
2R0	2.0					200	20			201							200	302			3000																			
2R1	2.1					220	22			221							220	332			3300																			
2R2	2.2					240	24			241							240	392			3900																			
2R4	2.4		270	27		271	270	472	4700																															
2R7	2.7		50	EXTENDED VOLTAGE		300	30	EXTENDED VOLTAGE	200	N/A	512			5100	EXTENDED VOLTAGE		1500	512			5100																			
3R0	3.0																																							

SPECIAL VALUES, TOLERANCES, DIFFERENT WVDC AND MATCHING AVAILABLE. • ENCAPSULATION OPTION AVAILABLE. PLEASE CONSULT FACTORY.  
Capacitance values in bold type indicate porcelain dielectric. All other capacitance values indicate ceramic dielectric.

## HOW TO ORDER

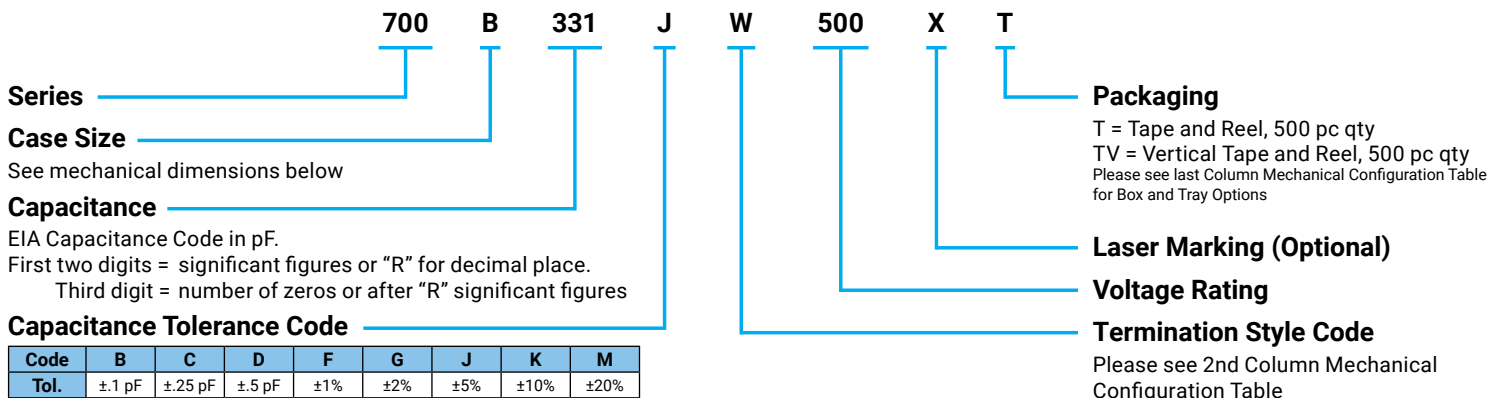

The above part number refers to a 700B Series (case size B) 330 pF capacitor, J tolerance (±5%), 500 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and Tape and Reel packaging.

# RF/Microwave Capacitors

## RF/Microwave Multilayer Capacitors (MLC)

### 700B Series NPO Porcelain and Ceramic Multilayer Capacitors



#### MECHANICAL CONFIGURATION

Series & Case Size	Term. Code	MIL-PRF-55681	Case Size & Type	Outline W/T is a Termination Surface	Body Dimensions inches (mm)			Lead and Termination Dimensions and Material			Pkg Type	Pkg Code	
					Length (L)	Width (W)	Thickness (T)	Overlap (Y)	Materials				
700B	W	CDR14BP	B Solder Plate		110+.025-.010 (2.79+0.64-0.25)	.110±.015 (2.79±0.38)	.102 (2.59) max.	.015 (0.38) ±.010 (0.25)	Tin/Lead, Solder Plated over Nickel Barrier Termination		T&R, 1000 or 500 pcs Vertical T&R, 1000 or 500 pcs Cap Pac, 100 pcs	T1K or T TV1K or TV C100	
700B	P	CDR14BP	B Pellet		110+.025-.010 (2.79+0.64-0.25)	.110±.015 (2.79±0.38)	.102 (2.59)		Heavy Tin/Lead Coated, over Nickel Barrier Termination		T&R, 1000 or 500 pcs Vertical T&R, 1000 or 500 pcs Cap Pac, 100 pcs	T1K or T TV1K or TV C100	
700B	T	N/A	B Solderable Nickel Barrier		110+.025-.010 (2.79+0.64-0.25)	.110±.015 (2.79±0.38)	.102 (2.59)		RoHS Compliant Tin Plated over Nickel Barrier Termination		T&R, 1000 or 500 pcs Vertical T&R, 1000 or 500 pcs Cap Pac, 100 pcs	T1K or T TV1K or TV C100	
700B	CA	CDR13BP	B Gold Chip		110+.025-.010 (2.79+0.64-0.25)	.110±.015 (2.79±0.38)	.102 (2.59)		RoHS Compliant Gold Plated over Nickel Barrier Termination		T&R, 1000 or 500 pcs Vertical T&R, 1000 or 500 pcs Cap Pac, 100 pcs	T1K or T TV1K or TV C100	
700B	MS	CDR21BP	B Microstrip		.135±.015 (3.43±0.38)	.110±.015 (2.79±0.38)	.120 (3.05) max.	N/A	Length (L <sub>L</sub> )	Width (W <sub>L</sub> )	Thickness (T <sub>L</sub> )	Cap Pac, 20 pcs	C20
700B	AR	CDR22BP	B Axial Ribbon						.250 (6.35) min.	.093±.005 (2.36±0.13)	.004±.001 (.102±.025)	Box, 20 or 100 pcs	B20 or B100
700B	RR	CDR24BP	B Radial Ribbon		.145±.020 (3.68±0.51)	.102 (2.59) max.	.500 (12.7)		#26 AWG., .016 (.406) dia.nominal		Box, 20 or 100 pcs	B20 or B100	
700B	RW	CDR23BP	B Radial Wire				.950 min.				Box, 20 or 100 pcs	B20 or B100	
700B	AW	CDR25BP	B Axial Wire							Box, 20 or 100 pcs	B20 or B100		

Additional lead styles available: Narrow Microstrip (NM), Narrow Axial Ribbon (NA) and Vertical Narrow Microstrip (H). Other lead lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are RoHS compliant.

# RF/Microwave Capacitors

## RF/Microwave Multilayer Capacitors (MLC)

### 700B Series NPO Porcelain and Ceramic Multilayer Capacitors



#### MECHANICAL CONFIGURATION

Series & Case Size	Term. Code	MIL-PRF-55681	Case Size & Type	Outline W/T is a Termination Surface	Body Dimensions inches (mm)			Lead and Termination Dimensions and Material			Pkg Type	Pkg Code	
					Length (L)	Width (W)	Thickness (T)	Overlap (Y)	Materials				
700B	WN	Meets Requirements	B Non-Mag Solder Plate		.110 +.020 -.010 (2.79 +0.51 -0.25)	.110 ±.015 (2.79 ±0.38)	.102 (2.59) max.	.015 (0.38) ±.010 (0.25)	Tin / Lead, Solder Plated over Non-Magnetic Barrier Termination		T&R, 1000 or 500 pcs Vertical T&R, 1000 or 500 pcs Cap Pac, 100 pcs	T1K or T TV1K or TV C100	
700B	PN	Meets Requirements	B Non-Mag Pellet		.110 +.035 -.010 (2.79 +0.89 -0.25)	.110 ±.015 (2.79 ±0.38)			Heavy Tin / Lead, Coated over Non-Magnetic Barrier Termination		T&R, 1000 or 500 pcs Vertical T&R, 1000 or 500 pcs Cap Pac, 100 pcs	T1K or T TV1K or TV C100	
700B	TN	Meets Requirements	B Non-Mag Solderable Barrier		.110 +.020 -.010 (2.79 +0.51 -0.25)	.110 ±.015 (2.79 ±0.38)			RoHS Compliant Tin Plated over Non-Magnetic Barrier Termination		T&R, 1000 or 500 pcs Vertical T&R, 1000 or 500 pcs Cap Pac, 100 pcs	T1K or T TV1K or TV C100	
700B	MN	Meets Requirements	B Non-Mag Microstrip		.135 ±.015 (3.43 ±0.38)	.110 ±.015 (2.79 ±0.38)	.120 (3.05) max.	N/A	Length (L)	Width (W.)	Thickness (T.)	Cap Pac, 20 pcs	C20
700B	AN	Meets Requirements	B Non-Mag Axial Ribbon						.250 (6.35) min.	.093 ± .005 (2.36 ± 0.13)	.004 ± .001 (.102 ± .025)	Box, 20 or 100 pcs	B20 or B100
700B	FN	Meets Requirements	B Non-Mag Radial Ribbon						.145 ±.020 (3.68 ±0.51)	.102 (2.59) max.	N/A	.500 (12.7) min.	#26 AWG., .016 (.406) dia. nominal
700B	RN	Meets Requirements	B Non-Mag Axial Wire		.950 min.	Box, 20 or 100 pcs	B20 or B100						
700B	BN	Meets Requirements	B Non-Mag Radial Wire										

\*Capacitors with values greater than 200 pF contain a trace magnetic element that may exhibit weak magnetic properties.

\*\* Additional lead styles available: Narrow Microstrip (DN), Narrow Axial Ribbon (GN) and Vertical Narrow Microstrip (HN). Other lead lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and RoHS compliant.

**SUGGESTED MOUNTING PAD DIMENSIONS**

Horizontal  
Electrode Orientation

Vertical  
Electrode Orientation


Case B Vertical Mount					
Cap Value	Pad Size	A Min.	B Min.	C Min.	D Min.
0.1 pF	Normal	.065	.050	.075	.175
	High Density	.045	.030	.075	.135
0.2 pF	Normal	.090	.050	.075	.175
	High Density	.070	.030	.075	.135
0.3 to 510 pF	Normal	.110	.050	.075	.175
	High Density	.090	.030	.075	.135
> 510 pF	Normal	.120	.050	.075	.175
	High Density	.100	.030	.075	.135


Horizontal Mount					
All Values	Pad Size	A Min.	B Min.	C Min.	D Min.
All Values	Normal	.130	.050	.075	.175
	High Density	.110	.030	.075	.135

**PERFORMANCE DATA**


**ESR VS. CAPACITANCE  
SERIES 700, CASE B**

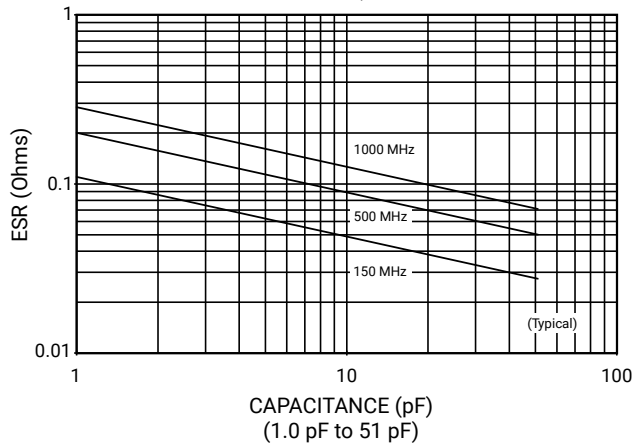


**Q VS. CAPACITANCE  
SERIES 700, CASE B**

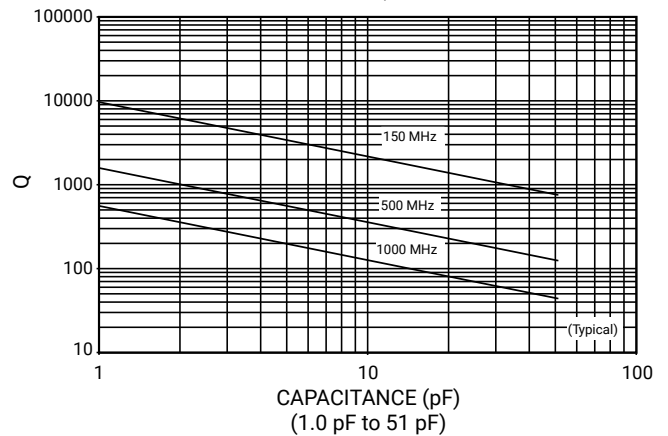

**ESR VS. CAPACITANCE  
SERIES 700, CASE B**

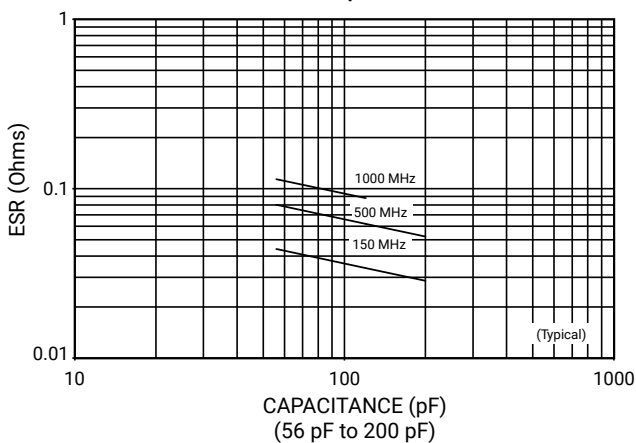


**Q VS. CAPACITANCE  
SERIES 700, CASE B**

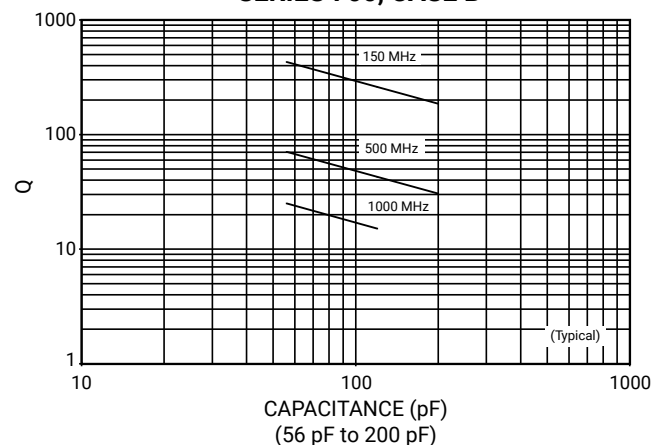


**PERFORMANCE DATA**


**ESR VS. CAPACITANCE**  
**SERIES 700, CASE B**

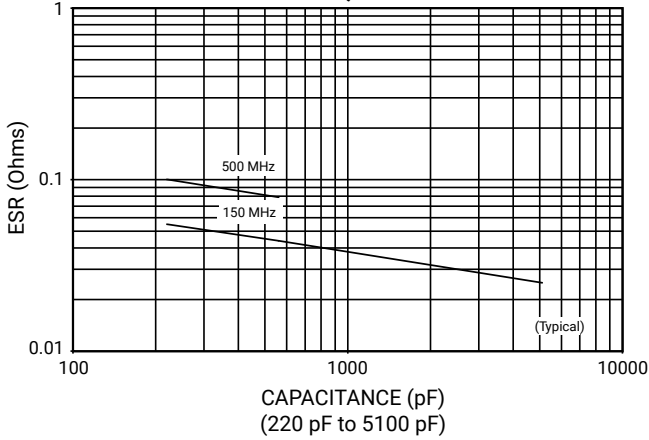


**Q VS. CAPACITANCE**  
**SERIES 700, CASE B**

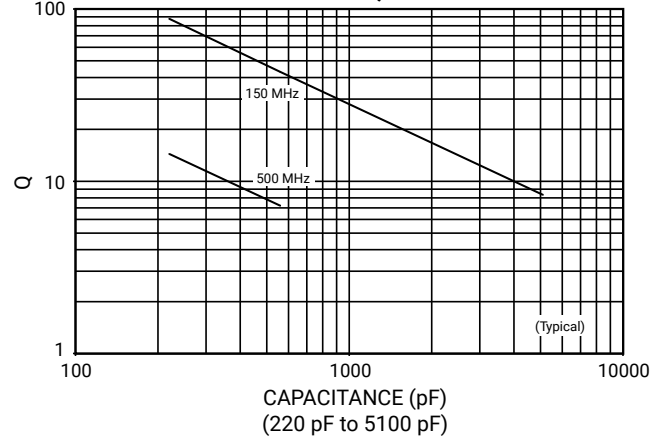


**SERIES RESONANCE VS. CAPACITANCE**  
**SERIES 700, CASE B**

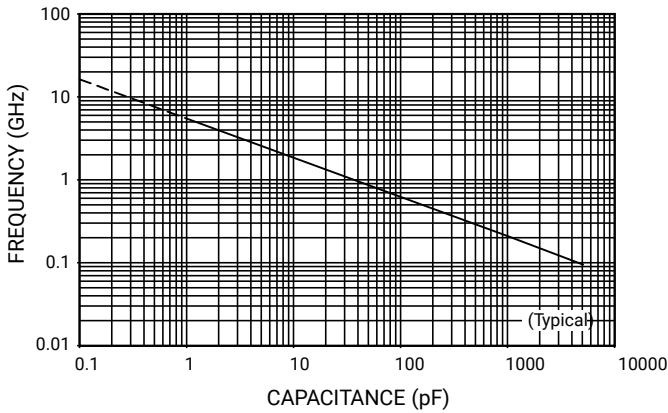


**CURRENT RATING VS. CAPACITANCE**  
**SERIES 700, CASE B**

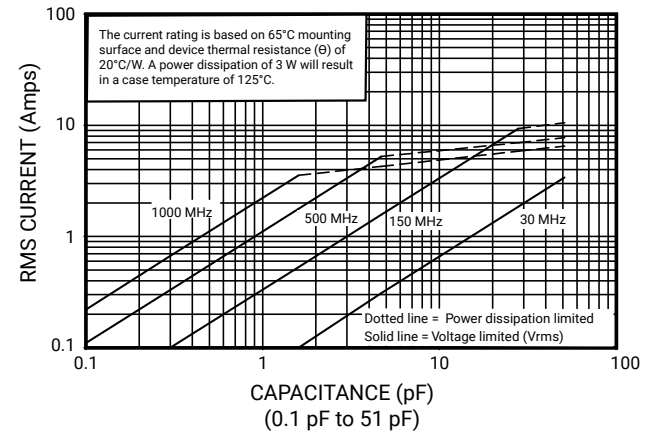

**CURRENT RATING VS. CAPACITANCE**  
**SERIES 700, CASE B**

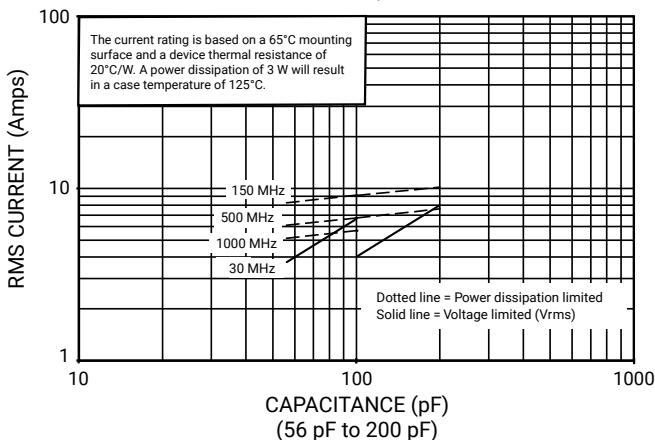


**CURRENT RATING VS. CAPACITANCE**  
**SERIES 700, CASE B**

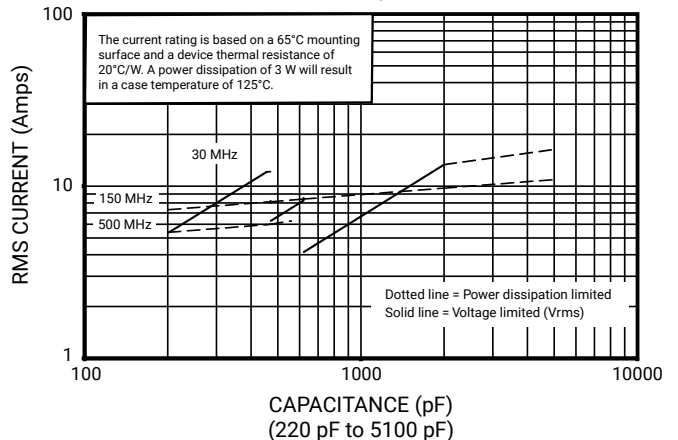


**PERFORMANCE DATA**


**CURRENT CHANGE VS. TEMPERATURE**  
**SERIES 700, CASE B**

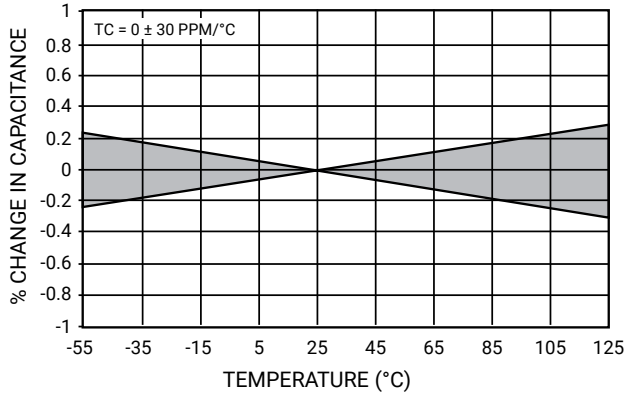

**CURRENT RATING VS. CAPACITANCE**  
**SERIES 700, CASE B, EXTENDED VOLTAGE**

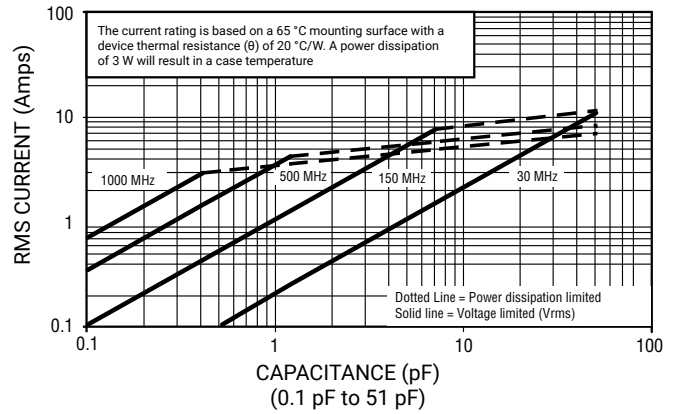

**CURRENT RATING VS. CAPACITANCE**  
**SERIES 700, CASE B, EXTENDED VOLTAGE**

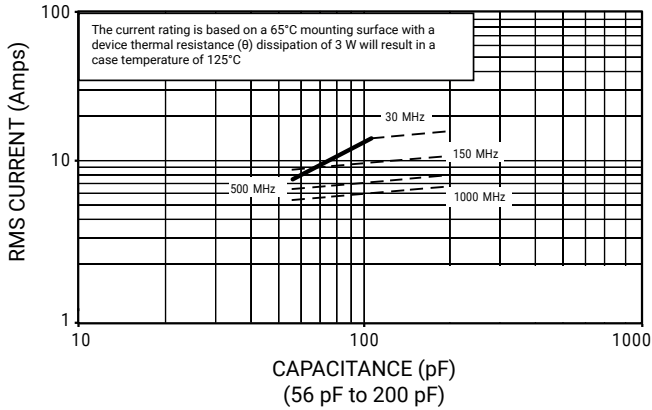

**RF/Microwave Capacitors**  
**RF/Microwave Multilayer Capacitors (MLC)**  
**700B Series NPO Porcelain and Ceramic Multilayer Capacitors**



**SAMPLE KITS**

Kit #	RoHS Compliant	Item Number	Description	Cap. Value Range (pF)	Cap Value (pF)	Tol.	Price
Kit 11	-	DK0011	700B Porcelain and Ceramic 16 different values, 15 pcs. min. per value	1.0 to 10	1.0, 1.2, 1.5, 1.8, 2.0, 2.2, 2.4, 2.7, 3.0, 3.3.....	±0.1	\$165.00
Kit 11T		DK0011T			3.9, 4.7, 5.6, 6.8, 8.2 3.9, 4.7, 5.6, 6.8, 8.2 .....	±0.25	
Kit 12	-	DK0012	700B Porcelain and Ceramic 16 different values, 15 pcs. min. per value	10 to 100	10, 12, 15, 18, 20, 22, 24, 27, 30, 33, 39, 47, 56, 68, 82, 100 .....	±5%	\$165.00
Kit 12T		DK0012T					
Kit 13	-	DK0013	700B Porcelain and Ceramic 16 different values, 15 pcs. min. per value	100 to 1000	100, 120, 150, 180, 200, 220, 240, 270, 300, 330, 390, 470 .....	± 5%	\$165.00
Kit 13T		DK0013T			560, 680, 820, 1000.....	±10%	



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Kyocera AVX:

[700B0R1BT500XT](#) [700B0R1BW500XT](#) [700B0R2BT500XT](#) [700B0R2BW500XT](#) [700B0R3BT500XT](#)  
[700B0R3BW500XT](#) [700B0R3CT500XT](#) [700B0R3CW500XT](#) [700B0R4BT500XT](#) [700B0R4BW500XT](#)  
[700B0R4CT500XT](#) [700B0R4CW500XT](#) [700B0R5BT500XT](#) [700B0R5BW500XT](#) [700B0R5CT500XT](#)  
[700B0R5CW500XT](#) [700B0R5DT500XT](#) [700B0R5DW500XT](#) [700B0R6BT500XT](#) [700B0R6BW500XT](#)  
[700B0R6CT500XT](#) [700B0R6CW500XT](#) [700B0R6DT500XT](#) [700B0R6DW500XT](#) [700B0R7BT500XT](#)  
[700B0R7BW500XT](#) [700B0R7CT500XT](#) [700B0R7CW500XT](#) [700B0R7DT500XT](#) [700B0R7DW500XT](#)  
[700B0R8BT500XT](#) [700B0R8BW500XT](#) [700B0R8CT500XT](#) [700B0R8CW500XT](#) [700B0R8DT500XT](#)  
[700B0R8DW500XT](#) [700B0R9BT500XT](#) [700B0R9BW500XT](#) [700B0R9CT500XT](#) [700B0R9CW500XT](#)  
[700B0R9DT500XT](#) [700B0R9DW500XT](#) [700B100FT500XT](#) [700B100FW500XT](#) [700B100GT500XT](#)  
[700B100GW500XT](#) [700B100JT500XT](#) [700B100JW500XT](#) [700B100KT500XT](#) [700B100KW500XT](#) [700B100MT500XT](#)  
[700B100MW500XT](#) [700B101FT500XT](#) [700B101FW500XT](#) [700B101GT500XT](#) [700B101GW500XT](#)  
[700B101JT500XT](#) [700B101JW500XT](#) [700B101KT500XT](#) [700B101KW500XT](#) [700B101MT500XT](#) [700B101MW500XT](#)  
[700B102FT50XT](#) [700B102FW50XT](#) [700B102GT50XT](#) [700B102GW50XT](#) [700B102JT50XT](#) [700B102JW50XT](#)  
[700B102KT50XT](#) [700B102KW50XT](#) [700B102MT50XT](#) [700B102MW50XT](#) [700B110FT500XT](#) [700B110FW500XT](#)  
[700B110GT500XT](#) [700B110GW500XT](#) [700B110JT500XT](#) [700B110JW500XT](#) [700B110KT500XT](#) [700B110KW500XT](#)  
[700B110MT500XT](#) [700B110MW500XT](#) [700B111FT300XT](#) [700B111FW300XT](#) [700B111GT300XT](#)  
[700B111GW300XT](#) [700B111JT300XT](#) [700B111JW300XT](#) [700B111KT300XT](#) [700B111KW300XT](#) [700B111MT300XT](#)  
[700B111MW300XT](#) [700B112FT50XT](#) [700B112FW50XT](#) [700B112GT50XT](#) [700B112GW50XT](#) [700B112JT50XT](#)  
[700B112JW50XT](#) [700B112KT50XT](#) [700B112KW50XT](#)