

HF115FK

MINIATURE HIGH POWER RELAY



File No.:E134517



File No.:116934



File No.:CQC17002176308



Features

- Low height: 15.7 mm
- 16A switching capability
- 5kV dielectric strength (between coil and contacts)
- Creepage distance: 10mm
- Meeting reinforce insulation
- Flux proofed type
- Product in accordance to IEC 60335-1 available
- UL insulation system: Class F

CONTACT DATA

Contact arrangement	1A, 1C	2A, 2C
Contact resistance ¹⁾	100mΩ max.(at 1A 6VDC)	
Contact material	AgSnO ₂	
Contact rating (Res. load)	12A/16A 250VAC	8A 250VAC
Max. switching voltage	400VAC	
Max. switching current	12A / 16A	10A
Max. switching power	3000VA / 4000VA	2000VA
Mechanical endurance	1 x 10 ⁷ OPS	
Electrical endurance	H3(P)T type: 1 x 10 ⁵ OPS (NO: 16A 277VAC, Resistive Load at 40°C, 1s on 9s off) Z3(P)T type: 5 x 10 ⁴ OPS (NO: 16A 250VAC, Resistive Load at 85°C, 1s on 9s off) 2Z4(P)T type: 5 x 10 ⁴ OPS (NO: 8A 250VAC, Resistive Load at 85°C, 1s on 9s off) Z33 type: 1 x 10 ⁵ OPS (NO: 16A 277VAC, Resistive Load at 40°C, 1s on 9s off) 2Z43 type: 5 x 10 ⁴ OPS (NO: 8A 277VAC, Resistive Load at 40°C, 1s on 9s off)	

Notes: 1) The data shown above are initial values.

CHARACTERISTICS

Insulation resistance	1000MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	5000VAC 1min
	Between open contacts	1000VAC 1min
	Between contact sets	2500VAC 1min
Surge voltage (between coil & contacts)	10kV (1.2 x 50μs)	
Operate time (at rated. volt.)	10ms max.	
Release time (at rated. volt.)	5ms max.	
Shock resistance *	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance *	10Hz to 150Hz 10g/5g	
Humidity	5% to 85% RH	
Ambient temperature	-40°C to 85°C	
Termination	PCB	
Unit weight	Approx. 13g	
Construction	Flux proofed	

Notes: 1) The data shown above are initial values.

2) * Index is not in relay length direction.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2019 Rev. 1.00

COIL

Coil power	Approx. 400mW(Standard type)
	Approx. 530mW(high power consumption type)

COIL DATA

at 23°C

Standard type

Nominal Voltage VDC	Pick-up Voltage VDC max. ¹⁾	Drop-out Voltage VDC min. ¹⁾	Max. Voltage VDC * ²⁾	Coil Resistance Ω
5	3.50	0.5	7.5	62 x (1±10%)
6	4.20	0.6	9.0	90 x (1±10%)
9	6.30	0.9	13.5	202 x (1±10%)
12	8.40	1.2	18	360 x (1±10%)
18	12.60	1.8	27	810 x (1±10%)
24	16.80	2.4	36	1440 x (1±10%)
48	33.60	4.8	72	5760 x (1±15%)

COIL DATA

at 23°C

high power consumption type

Nominal Voltage VDC	Pick-up Voltage VDC max. ¹⁾	Drop-out Voltage VDC min. ¹⁾	Max. Voltage VDC * ²⁾	Coil Resistance Ω
5	≤3.50	≥0.5	7.5	47 x (1±10%)
6	≤4.20	≥0.6	9.0	68 x (1±10%)
9	≤6.30	≥0.9	13.5	153 x (1±10%)
12	≤8.40	≥1.2	18	271 x (1±10%)
18	≤12.60	≥1.8	27	611 x (1±10%)
24	≤16.80	≥2.4	36	1086 x (1±10%)
48	≤33.60	≥4.8	72	4347 x (1±15%)

Notes: 1) The data shown above are initial values.

2)*Maximum voltage refers to the maximum voltage which relay coil could endure in a short period of time.

SAFETY APPROVAL RATINGS

Standard type		
UL/CUL	AgSnO ₂	Z1T: 12A 250VAC at 85°C Z2T: 12A 250VAC at 85°C Z3T: 16A 250VAC at 85°C Z24T: 8A 250VAC at 85°C
	AgNi	Z13: 12A 250VAC at 40°C Z23: 12A 250VAC at 40°C Z33: 16A 250VAC at 40°C Z243: 8A 250VAC at 40°C
VDE	AgSnO ₂	Z1T: 12A 250VAC at 85°C Z2T: 12A 250VAC at 85°C Z3T: 16A 250VAC at 85°C Z24T: 8A 250VAC at 85°C
	AgNi	Z13: 12A 250VAC at 85°C Z23: 12A 250VAC at 85°C Z33: 16A 250VAC at 85°C Z243: 8A 250VAC at 85°C

SAFETY APPROVAL RATINGS

high power consumption type	
UL/CUL	Z1PT: 12A 277VAC 85°C 16A 277VAC room temperature TV8 NO room temperature Z2PT: 12A 277VAC 85°C 6A 277VAC room temperature TV8 NO room temperature Z3PT: 16A 277VAC 85°C TV8 NO room temperature Z24PT: 8A 250VAC 85°C
VDE	Z1PT: 12A 277VAC 85°C Z2PT: 12A 277VAC 85°C Z3PT: 16A 277VAC 85°C Z24PT: 8A 250VAC 85°C

Notes: 1) All values unspecified are at room temperature.
2) Only typical loads are listed above. Other load specifications can be available upon request.

ORDERING INFORMATION

Type	HF115FK / 12 -H 3 P T (XXX)
Coil voltage	5, 6, 9, 12, 18, 24, 48 VDC
Contact arrangement	H: 1 Form A Z: 1 Form C 2H: 2 Form A 2Z: 2 Form C
Version	1: 3.5mm 1 pole 12A 2: 5.0mm 1 pole 12A 3: 5.0mm 1 pole 16A 4: 5.0mm 2 pole 8A
Coil type	P: high power consumption type Nil: Standard
Contact material ¹⁾	T: AgSnO ₂ 3: AgNi (Standard)
Special code ³⁾	XXX: Customer special requirement Nil: Standard


Notes: 1) We recommend flux proofed types for a clean environment (free from contaminations like H₂S, SO₂, NO₂, dust, etc.).
2) Contact is recommended for suitable condition and specifications if water cleaning or surface process is involved in assembling relays on PCB.
3) The customer special requirement express as special code after evaluating by Hongfa. e.g.(335) stands for product in accordance to IEC 60335-1 (GWT).

OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT


Unit: mm

Outline Dimensions

3.5mm Pinning (HF115FK/□□□-1-□)

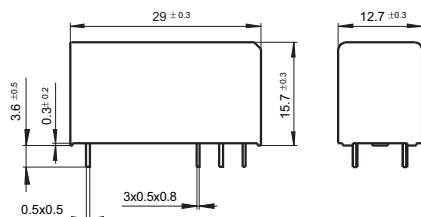

5mm Pinning (HF115FK/□□□-□-2/3/4-□)

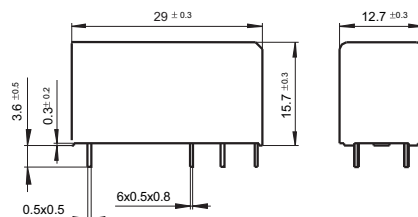

Wiring Diagram (Bottom view)

3.5/5mm Pinning, 1 Pole, 12A, HF115FK/ □□□-1/2-□



1 Form A




1 Form C

5mm Pinning, 1 Pole, 16A, HF115FK/ □□□-3-□




1 Form A




1 Form C

5mm Pinning, 2 Pole, 8A, HF115FK/ □□□-2□-4-□




2 Form A




2 Form C

PCB Layout (Bottom view)


3.5mm 1Pole 12A




5mm 1Pole 12A

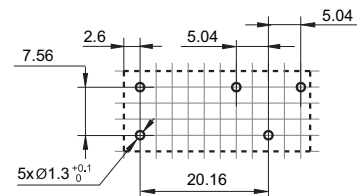

5mm 1Pole 16A

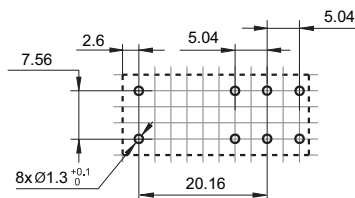


5mm 2Pole 8A

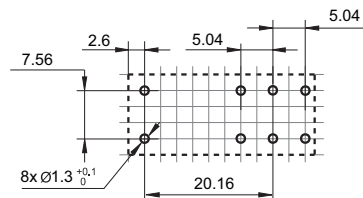


- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤ 1 mm, tolerance should be ± 0.2 mm; outline dimension > 1 mm and ≤ 5 mm, tolerance should be ± 0.3 mm; outline dimension > 5 mm, tolerance should be ± 0.4 mm.
 2) The tolerance without indicating for PCB layout is always ± 0.1 mm.
 3) The width of the gridding is 2.52mm.

CHARACTERISTIC CURVES


MAXIMUM SWITCHING POWER

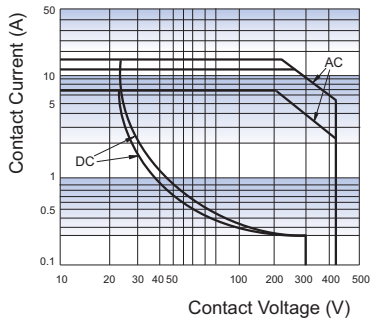

ENDURANCE CURVE



COIL OPERATING RANGE (DC) *

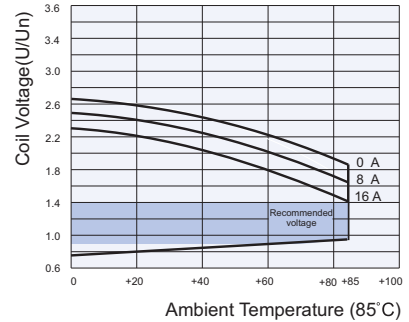

Test conditions:

- 1) Curve A: Z24T type
Curve B: Z2T type (or Z2T type)
Curve C: Z3T type
- 2) Test conditions:
NO, resistive load, 250VAC, flux proofed,
at 85°C, 1s on 9s off

Notes: * The use of a relay with an energising voltage other than the rated coil voltage may lead to reduced electrical life. An energising voltage over the above range may damage the insulation of relay coil.

Disclaimer

The specification is for reference only. See to 'Terminology and Guidelines' for more information. Specifications subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.