


# ALUMINUM ELECTROLYTIC CAPACITORS

# URS

Compact & Low-profile Sized




- Compact & low profile case size.
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).



## Specifications

Item	Performance Characteristics																																						
Category Temperature Range	-40 to +85°C																																						
Rated Voltage Range	6.3 to 400V																																						
Rated Capacitance Range	10 to 10000µF																																						
Capacitance Tolerance	±20% at 120Hz, 20°C																																						
Leakage Current	<table border="1"> <tr> <th>Rated voltage (V)</th> <th>6.3 to 100</th> <th>160 to 400</th> </tr> <tr> <td>_____</td> <td>After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV. After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV.</td> <td>After 1 minute's application of rated voltage at 20°C, I = 0.04CV+100 (µA) or less</td> </tr> </table>	Rated voltage (V)	6.3 to 100	160 to 400	_____	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV. After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV.	After 1 minute's application of rated voltage at 20°C, I = 0.04CV+100 (µA) or less																																
	Rated voltage (V)	6.3 to 100	160 to 400																																				
_____	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV. After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV.	After 1 minute's application of rated voltage at 20°C, I = 0.04CV+100 (µA) or less																																					
Tangent of loss angle (tan δ)	For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF. Measurement frequency : 120Hz at 20°C <table border="1"> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160</th> <th>200</th> <th>250</th> <th>400</th> </tr> <tr> <td>tan δ (MAX.)</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.20</td> <td>0.20</td> <td>0.20</td> <td>0.25</td> </tr> </table>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	400	tan δ (MAX.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.25												
Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	400																											
tan δ (MAX.)	0.28	0.24	0.20	0.16	0.14	0.12	0.10	0.08	0.20	0.20	0.20	0.25																											
Stability at Low Temperature	Measurement frequency : 120Hz <table border="1"> <tr> <th>Rated voltage (V)</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160</th> <th>200</th> <th>250</th> <th>400</th> </tr> <tr> <th rowspan="2">Impedance ratio (MAX.)</th> <td>Z-25°C / Z+20°C</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>3</td> <td>6</td> </tr> <tr> <td>Z-40°C / Z+20°C</td> <td>12</td> <td>10</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>4</td> <td>4</td> <td>10</td> </tr> </table>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	400	Impedance ratio (MAX.)	Z-25°C / Z+20°C	5	4	3	2	2	2	2	2	3	3	6	Z-40°C / Z+20°C	12	10	8	5	4	3	3	3	4	4	10
	Rated voltage (V)	6.3	10	16	25	35	50	63	100	160	200	250	400																										
Impedance ratio (MAX.)	Z-25°C / Z+20°C	5	4	3	2	2	2	2	2	3	3	6																											
	Z-40°C / Z+20°C	12	10	8	5	4	3	3	3	4	4	10																											
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 85°C.																																						
	<table border="1"> <tr> <td>Capacitance change</td> <td>Within ±20% of the initial capacitance value</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>	Capacitance change	Within ±20% of the initial capacitance value	tan δ	200% or less than the initial specified value	Leakage current	Less than or equal to the initial specified value																																
	Capacitance change	Within ±20% of the initial capacitance value																																					
tan δ	200% or less than the initial specified value																																						
Leakage current	Less than or equal to the initial specified value																																						
Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.																																						
Marking	Printed with white color letter on black sleeve.																																						

## Radial Lead Type

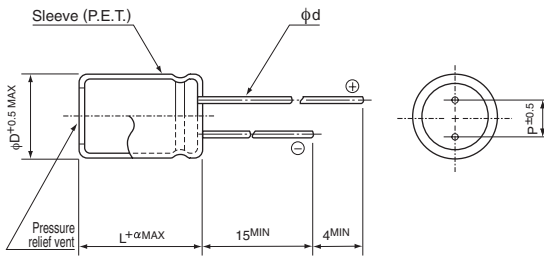

	(mm)				
φD	10	12.5	16	18	20
P	5.0	5.0	7.5	7.5	10.0
φd	0.6	0.6	0.8	0.8	1.0


α	(φD < 20) 1.5
	(φD ≥ 20) 2.0

- Please refer to the Guidelines for Aluminum Electrolytic Capacitors for end seal configuration information.

## Frequency coefficient of rated ripple current

V	Cap.(µF)	Frequency				
		50Hz	120Hz	300Hz	1 kHz	10kHz or more
6.3 to 100	47	0.75	1.00	1.35	1.57	2.00
	100 to 470	0.80	1.00	1.23	1.34	1.50
	1000 to 10000	0.85	1.00	1.10	1.13	1.15
160 to 400	10 to 220	0.80	1.00	1.25	1.40	1.60

## Type numbering system (Example : 10V 1000µF)

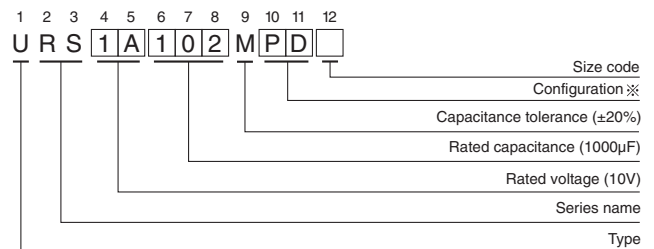

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
10	PD
12.5 to 18	HD
20	RD

● Dimension table in next page.

URS

## ■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance ( $\mu$ F)	Case Size $\phi$ D $\times$ L (mm)	tan $\delta$	Leakage Current ( $\mu$ A)		Rated Ripple (mArms) (85°C/120Hz)	Part Number	
				at 20°C after 1 minute	at 20°C after 2 minutes			
6.3 (0J)	2200	12.5 $\times$ 15	0.30	415.8	138.6	890	URS0J222MHD	
	3300	16 $\times$ 15	0.32	623.7	207.9	1200	URS0J332MHD	
	4700	16 $\times$ 15	0.34	888.3	296.1	1410	URS0J472MHD	
	6800	18 $\times$ 15	0.38	1285.2	428.4	1660	URS0J682MHD	
	10000	18 $\times$ 20	0.46	1890	630	2020	URS0J103MHD	
10 (1A)	1000	10 $\times$ 12.5	0.24	300	100	620	URS1A102MPD	
	2200	12.5 $\times$ 15	0.26	660	220	960	URS1A222MHD	
	3300	16 $\times$ 15	0.28	990	330	1300	URS1A332MHD	
	4700	18 $\times$ 15	0.30	1410	470	1550	URS1A472MHD	
	6800	18 $\times$ 20	0.34	2040	680	1850	URS1A682MHD	
10000	18 $\times$ 25	0.42	3000	1000	2350	URS1A103MHD		
	16 (1C)	1000	12.5 $\times$ 12.5	0.20	480	160	720	URS1C102MHD
		2200	16 $\times$ 15	0.22	1056	352	1160	URS1C222MHD
		3300	18 $\times$ 15	0.24	1584	528	1460	URS1C332MHD
		4700	18 $\times$ 20	0.26	2256	752	1770	URS1C472MHD
6800		18 $\times$ 25	0.30	3264	1088	2170	URS1C682MHD	
25 (1E)	470	10 $\times$ 12.5	0.16	352.5	117.5	530	URS1E471MPD	
	1000	12.5 $\times$ 15	0.16	750	250	830	URS1E102MHD	
	2200	18 $\times$ 15	0.18	1650	550	1360	URS1E222MHD	
	3300	18 $\times$ 20	0.20	2475	825	1720	URS1E332MHD	
	4700	18 $\times$ 25	0.22	3525	1175	2050	URS1E472MHD	
35 (1V)	330	10 $\times$ 12.5	0.14	346.5	115.5	480	URS1V331MPD	
	470	12.5 $\times$ 12.5	0.14	493.5	164.5	590	URS1V471MHD	
	1000	16 $\times$ 15	0.14	1050	350	1010	URS1V102MHD	
	2200	18 $\times$ 20	0.16	2310	770	1560	URS1V222MHD	
	3300	20 $\times$ 25	0.18	3465	1155	2000	URS1V332MRD	
50 (1H)	220	10 $\times$ 12.5	0.12	330	110	420	URS1H221MPD	
	330	12.5 $\times$ 12.5	0.12	495	165	530	URS1H331MHD	
	470	16 $\times$ 15	0.12	705	235	750	URS1H471MHD	
	1000	18 $\times$ 20	0.12	1500	500	1160	URS1H102MHD	
	2200	20 $\times$ 25	0.14	3300	1100	1750	URS1H222MRD	
63 (1J)	220	12.5 $\times$ 12.5	0.10	415.8	138.6	490	URS1J221MHD	
	330	12.5 $\times$ 15	0.10	623.7	207.9	710	URS1J331MHD	
	470	16 $\times$ 15	0.10	888.3	296.1	900	URS1J471MHD	
100 (2A)	47	10 $\times$ 12.5	0.08	141	47	230	URS2A470MPD	
	100	12.5 $\times$ 15	0.08	300	100	370	URS2A101MHD	
	220	16 $\times$ 15	0.08	660	220	620	URS2A221MHD	
	330	18 $\times$ 15	0.08	990	330	760	URS2A331MHD	
160 (2C)	47	16 $\times$ 15	0.20	400.8	—	420	URS2C470MHD	
	68	18 $\times$ 15	0.20	535.2	—	490	URS2C680MHD	
	68	16 $\times$ 20	0.20	535.2	—	490	URS2C680MHD6	

For cut leads, formed leads or taped parts, please add the appropriate code after the size code (12th digit).  
If there is no size code in the part number, please add size code "1" and then add the appropriate code.

URS

## ■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance ( $\mu$ F)	Case Size $\phi$ D $\times$ L (mm)	tan $\delta$	Leakage Current ( $\mu$ A)		Rated Ripple (mArms) (85°C/120Hz)	Part Number
				at 20°C after 1 minute	at 20°C after 2 minutes		
160 (2C)	100	18 $\times$ 20	0.20	740	—	590	URS2C101MHD
	100	20 $\times$ 15	0.20	740	—	590	URS2C101MRD6
	150	18 $\times$ 25	0.20	1060	—	710	URS2C151MHD
	150	20 $\times$ 20	0.20	1060	—	710	URS2C151MRD6
	220	20 $\times$ 25	0.20	1508	—	770	URS2C221MRD
200 (2D)	33	16 $\times$ 15	0.20	364	—	350	URS2D330MHD
	47	18 $\times$ 15	0.20	476	—	420	URS2D470MHD
	47	16 $\times$ 20	0.20	476	—	420	URS2D470MHD6
	68	18 $\times$ 20	0.20	644	—	490	URS2D680MHD
	68	20 $\times$ 15	0.20	644	—	490	URS2D680MRD6
	100	18 $\times$ 25	0.20	900	—	590	URS2D101MHD
	100	20 $\times$ 20	0.20	900	—	590	URS2D101MRD6
250 (2E)	22	16 $\times$ 15	0.20	320	—	280	URS2E220MHD
	33	18 $\times$ 15	0.20	430	—	350	URS2E330MHD
	33	16 $\times$ 20	0.20	430	—	350	URS2E330MHD6
	47	18 $\times$ 20	0.20	570	—	420	URS2E470MHD
	47	20 $\times$ 15	0.20	570	—	420	URS2E470MRD6
	68	18 $\times$ 20	0.20	780	—	490	URS2E680MHD
	100	18 $\times$ 25	0.20	1100	—	590	URS2E101MHD
400 (2G)	10	16 $\times$ 15	0.25	260	—	140	URS2G100MHD
	22	18 $\times$ 15	0.25	452	—	280	URS2G220MHD
	22	16 $\times$ 20	0.25	452	—	280	URS2G220MHD6
	33	18 $\times$ 20	0.25	628	—	350	URS2G330MHD
	47	18 $\times$ 25	0.25	852	—	420	URS2G470MHD
	47	20 $\times$ 20	0.25	852	—	420	URS2G470MRD6
	68	20 $\times$ 25	0.25	1188	—	490	URS2G680MRD

For cut leads, formed leads or taped parts, please add the appropriate code after the size code (12th digit).  
If there is no size code in the part number, please add size code "1" and then add the appropriate code.

- For formed lead or taped product specifications and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Nichicon:

[URS0J682MHD](#) [URS1A101MCD](#) [URS1A102MPA1TD](#) [URS1A102MPD](#) [URS1A472MHD](#) [URS1A682MHD](#)  
[URS1C100MCD](#) [URS1C470MCD](#) [URS1C471MNA](#) [URS1C471MND](#) [URS1C472MHD](#) [URS1C682MHD](#)  
[URS1E470MCD](#) [URS1E471MPA](#) [URS1E471MPD](#) [URS1E472MHA](#) [URS1E472MHD](#) [URS0J470MCD](#)  
[URS0J471MND](#) [URS0J472MHD](#) [URS1A332MHA](#) [URS1A332MHD](#) [URS1A470MCD](#) [URS1A471MNA](#)  
[URS1C330MCD](#) [URS1C331MND](#) [URS1C332MHA](#) [URS1C332MHA1AA](#) [URS1C332MHA1TN](#) [URS1C332MHD](#)  
[URS0J330MCD](#) [URS0J331MCD](#) [URS0J332MHD](#) [URS1A222MHA](#) [URS1A222MHD](#) [URS1A330MCD](#)  
[URS1A331MND](#) [URS1C220MCD](#) [URS1C221MND](#) [URS1C222MHA](#) [URS1C222MHA1TN](#) [URS1C222MHD](#)  
[URS1E220MCD](#) [URS1E221MNA1TD](#) [URS1E221MND](#) [URS1E222MHA](#) [URS1E222MHA1TN](#) [URS1E222MHD](#)  
[URS1A103MHD](#) [URS1A220MCD](#) [URS1A221MCA1TD](#) [URS1A221MCD](#) [URS1C101MCD](#) [URS1C102MHA](#)  
[URS1C102MHD](#) [URS1E100MCA1TD](#) [URS1E100MCD](#) [URS1E101MCA](#) [URS1E101MCD](#) [URS1E102MHA](#)  
[URS1E102MHA1TO](#) [URS1E102MHD](#) [URS1E4R7MCD](#) [URS1H010MCD](#) [URS1H0R1MCD](#) [URS1H2R2MCD](#)  
[URS1H330MCD](#) [URS1H331MHA](#) [URS1H331MHD](#) [URS1J101MND](#) [URS1J220MCD](#) [URS1J221MHD](#)  
[URS1V222MHA](#) [URS1V222MHA1TN](#) [URS1V222MHD](#) [URS1V330MCD](#) [URS1V331MPA](#) [URS1V331MPD](#)  
[URS2A221MHD](#) [URS2A2R2MCD](#) [URS2A330MND](#) [URS1E330MCD](#) [URS1E331MNA](#) [URS1E331MND](#)  
[URS1E332MHD](#) [URS1H220MCD](#) [URS1H221MPA](#) [URS1H221MPD](#) [URS1H222MRA](#) [URS1H222MRD](#)  
[URS1HR33MCD](#) [URS1HR47MCD](#) [URS1J100MCD](#) [URS1V102MHA](#) [URS1V102MHD](#) [URS1V220MCD](#)  
[URS1V221MNA](#) [URS1V221MND](#) [URS1H100MCD](#) [URS1H101MNA](#)