


LQW2UASR56J00L , LQW2UASR56J00B

In Production General 125 Wound MesSineld MesSineld MesSineld OK ROHS REACH

Shape

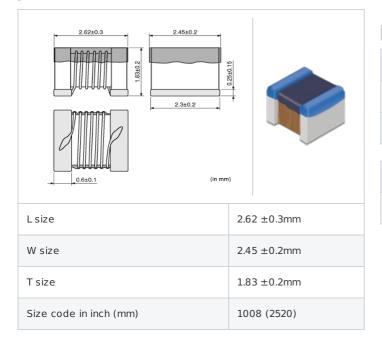

"#" indicate	es a	package	specification	code.
--------------	------	---------	---------------	-------

References

Packaging code	Specifications	Minimum quantity
L	ϕ 180mm Embossed taping	2000
В	Packing in bulk	500

Mass (Typ.)	
1 piece	0.039g

Specifications


Inductance	560nH ±5%
Inductance test frequency	25MHz
Rated current (Itemp) (Based on Temperature rise)	400mA
Max. of DC resistance	1.33Ω
Q (min.)	45
Q test frequency	100MHz
Self resonance frequency (min.)	415MHz
Operating temperature range (Self-temperature rise is not included)	-55~125°C
Class of magnetic shield	No magnetic shield


🔔 Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

Chart of characteristic data (The charts below may show another part number which shares its characteristics.)





Attention

 This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.