

Taille boîtier	A	B'	B	C	D'	D	E	F ±0,05	Pas	G	*
E	11,07	11,15	11,07	11,07	11,07	11,07	11,07	11,07	2,76	7,62	2x3
A	19,20	19,20	19,20	19,20	19,20	19,20	19,20	19,20	2,76	7,62	2x5
B	33,12	33,12	33,12	33,12	33,12	33,12	33,12	33,12	2,76	7,62	2x8
C	49,68	49,68	49,68	49,68	49,68	49,68	49,68	49,68	2,76	7,62	2x12
D	44,20	44,20	44,20	44,20	44,20	44,20	44,20	44,20	2,76	10,5	2x12

TECHNICAL DATA

" D " SUBMINIATURE CONNECTORS

SHELL :Steel .
finish : tinned

BODY : Glass filled thermoplastic .
Flame retardant to UL 94 V-0 .
Colour : black .


CONTACTS :Material for sockets : bronze
Material for pins brass
Finish of contact mating area :
0,76 m Gold over Nickel

ELECTRICAL Voltage rating 300 V Rms to 50Hz .
Nominal current 7,5 A (size20)
Voltage proof >1100 V Rms to 50 Hz
Contact resistance <5m Ohms .
Insulator resistance >5000 M Ohms.

CLIMATIC Temperature range -55°C 125°C
Damp heat 56 days (40°C - 95 % RH)

MECHANICAL Insertion force per contact 1,2N < F <2,5 N
Extraction force per contact 0,4 N mini
Mating and unmating force size E 30N maxi 3.5N mini
A 50N maxi 4.5N mini
B 83N maxi 8.0N mini
C 123N maxi 11N mini
D 166N max 14.5N mini
(With or without dimples)

MARKING Amphenol -(serie number)
Commercial reference
Manufacturing date

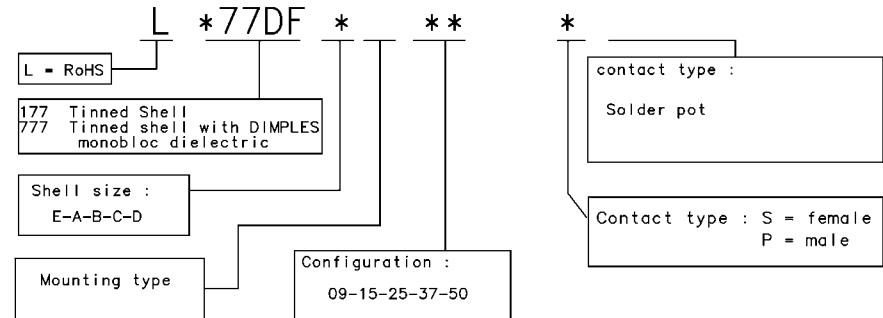

Amphenol Socapex
Usine de Dole

ECHELLE:1.5

Creation plan 01/12 05 Valloir

IND. MODIFICATION DATE Execut/Approv

N SERIE DESIGNATION

017F

L*77DF * ** *

PLAN NOTICE

DOSSIER: 17-NOTICES
librairie 17F