














< List of part numbers with package codes > LQH31MN220J03L , LQH31MN220J03K

### Shape

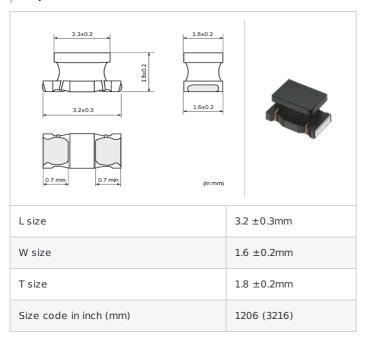

### Notes

When applied Rated current to the Products, self temperature rise shall be limited to  $20^\circ$  max and Inductance will be within  $\pm 10\%$  of initial Inductance value.

## References

| Packaging code | Specifications                  | Minimum quantity |
|----------------|---------------------------------|------------------|
| L              | $_{\Psi}$ 180mm Embossed taping | 2000             |
| K              | $\phi$ 330mm Embossed taping    | 7500             |

| Mass (Typ.) |        |
|-------------|--------|
| 1 piece     | 0.029g |

# Specifications

| Inductance  | 22μH ±5%           |
|---|--------------------|
| Inductance test frequency   | 1MHz               |
| Rated current (Itemp) (Based on Temperature rise)                   | 85mA               |
| Max. of DC resistance   | 4.03Ω              |
| Avg. of DC resistance   | 3.1Ω±30%           |
| Q (min.)  | 40                 |
| Q test frequency  | 2.5MHz             |
| Self resonance frequency (min.)                                     | 14MHz              |
| Operating temperature range (Self-temperature rise is not included) | -40∼85℃            |
| Class of magnetic shield  | No magnetic shield |

1 of 2



<sup>1.</sup> This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.




<sup>2.</sup> This datasheet has only typical specifications because there is no space for detailed specifications.

## Chart of characteristic data (The charts below may show another part number which shares its characteristics.)

Inductance-Current characteristics (Typ.)

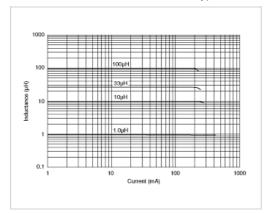

Q-Frequency characteristics (Typ.)

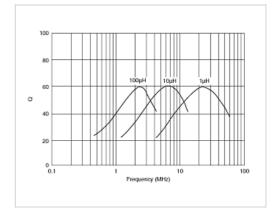

2 of 2



<sup>1.</sup> This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

 $<sup>2.</sup> This \ data sheet \ has \ only \ typical \ specifications \ because \ there \ is \ no \ space \ for \ detailed \ specifications.$