


# LQM18NN1R8K00#

" # " indicates a package specification code.



< List of part numbers with package codes >  
 LQM18NN1R8K00D , LQM18NN1R8K00J , LQM18NN1R8K00B

## Shape

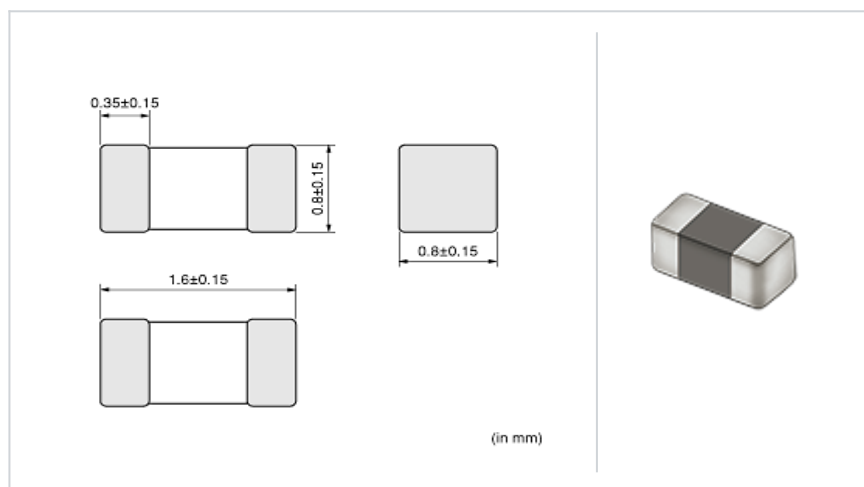

L size	1.6 ± 0.15mm
W size	0.8 ± 0.15mm
T size	0.8 ± 0.15mm
Size code in inch (mm)	0603 (1608)

## References

Packaging code	Specifications	Minimum quantity
D	180mm Paper taping	4000
J	330mm Paper taping	10000
B	Packing in bulk	1000

Mass (Typ.)	
1 piece	0.005g


## Specifications

Inductance	1800nH ± 10%
Inductance test frequency	10MHz
Rated current (I <sub>sat</sub> ) (Based on Inductance change)	25mA
Rated current (I <sub>temp</sub> ) (Based on Temperature rise)	25mA
Max. of DC resistance	0.95
Q (min.)	35
Q test frequency	10MHz
Self resonance frequency (min.)	55MHz
Operating temperature range (Self-temperature rise is not included)	-40 ~ 85
Class of magnetic shield	Magnetic shield of ferrite


### ⚠ Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it ' s specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

▪ Inductance-Current characteristics (Typ.)

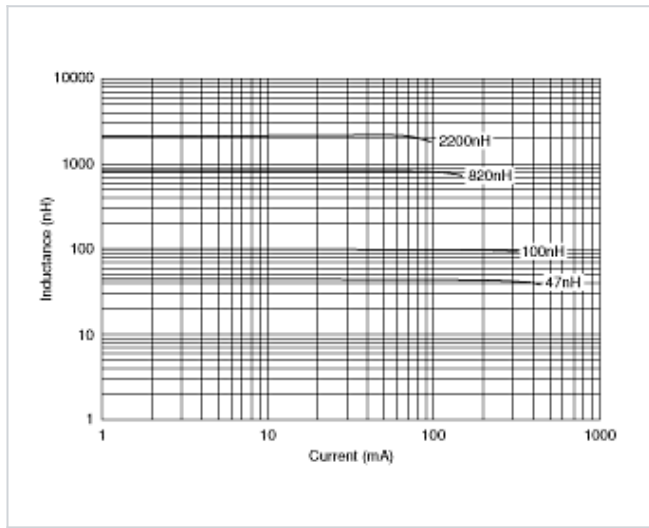

▪ Q-Frequency characteristics (Typ.)

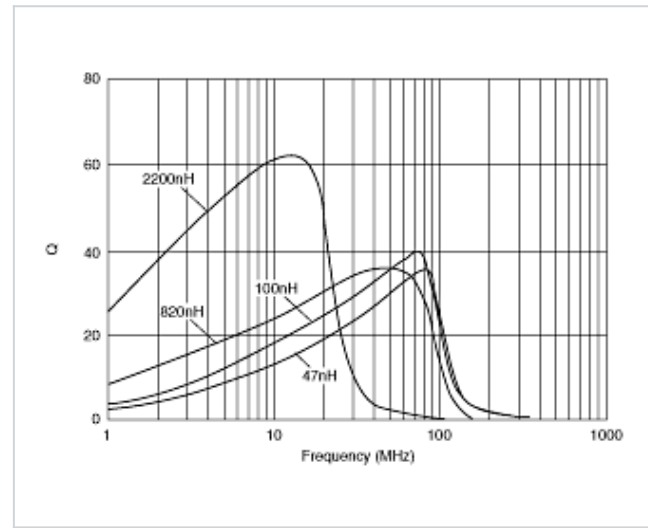

This PDF data has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.