

Note: This datasheet may be out of date.

Please download the latest datasheet of LQM21PN4R7MGR# from the official website of Murata Manufacturing

LQM21PN4R7MGR#

"#" indicates a package specification code.

Low DC Resistance Type



















< List of part numbers with package codes > LQM21PN4R7MGRB LQM21PN4R7MGRD





References









Packaging	Specifications	Minimum Order Quantity
В	Bulk(Bag)	1000
D	180mm Paper Tape	4000

Mass (typ.)	
1 piece	0.012g



Please consider 'Notice (Rating).' When rated current is applied to the products, the temperature rise caused by selfgenerated heat shall be limited to 40°C max.

1 of 5

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





Note: This datasheet may be out of date

 ${\sf Please \ download \ the \ latest \ data sheet \ of \ LQM21PN4R7MGR\# \ from \ the \ official \ website \ of \ Murata \ Manufacturing}}$ Co., Ltd.

LQM21PN4R7MGR#

"#" indicates a package specification code.



L size	2.0±0.15mm
W size	1.25±0.15mm
T size	0.9±0.1mm
Size code inch (mm)	0805 (2012)
Inductance	4.7μH±20%
Inductance Test Frequency	1MHz
Rated current (Itemp) (Based on Temperature rise)	0.8A(Ambient temp.85°C)0.6A(Ambient temp.125°C)
Max. of DC resistance	0.288Ω
Class of magnetic shield	Ferrite Core
Self resonance frequency (min.)	30MHz
DC Resistance Intermediate Values	0.23Ω±25%
Operating Temperature Range	-55°C to 125°C
Series	LQM21PN_GR

2 of 5

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.




LQM21PN4R7MGR#

"#" indicates a package specification code.



In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature.

Derating of Rated Current

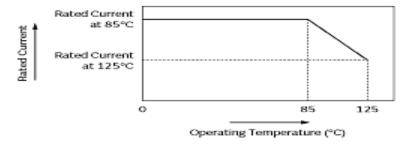

3 of 5

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.





LQM21PN4R7MGR#


"#" indicates a package specification code.




The charts below may show another part number which shares its characteristics.

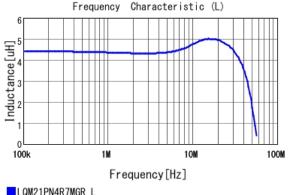




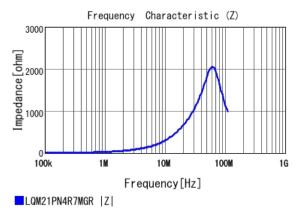

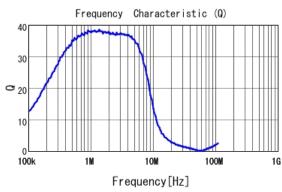



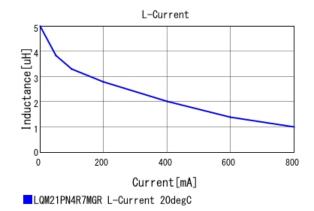

4 of 5

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.




Note: This datasheet may be out of date

Please download the latest datasheet of LQM21PN4R7MGR# from the official website of Murata Manufacturing Co., Ltd.

LQM21PN4R7MGR#

"#" indicates a package specification code.

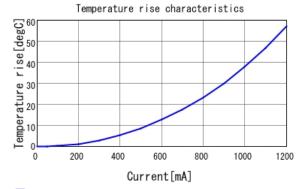

LQM21PN4R7MGR Temp. rise

5 of 5

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

