


TIMKEN

The Timken Company
 4500 Mt Pleasant St. NW
 N. Canton, OH 44720
 Phone: (234) 262-3000
 E-Mail: CustomerCAD@timken.com • Web site: www.timken.com

Timken Part Number 368A - 362A, Tapered Roller Bearings - TS (Tapered Single) Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

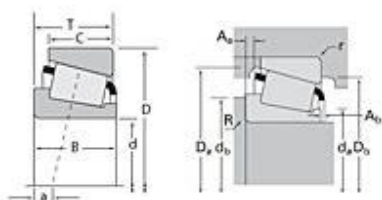

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	365
Cone Part Number	368A
Cup Part Number	362A
Design Units	Imperial
Bearing Weight	1.10 lb 0.500 Kg
Cage Type	Stamped Steel

Dimensions

d - Bore	2 in 50.8 mm
D - Cup Outer Diameter	3.5000 in 88.900 mm

B - Cone Width	0.8750 in 22.225 mm
C - Cup Width	0.6501 in 16.513 mm
T - Bearing Width	0.8125 in 20.638 mm

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius¹	0.14 in 3.560 mm
r - Cup Backface "To Clear" Radius²	0.050 in 1.27 mm
da - Cone Frontface Backing Diameter	2.20 in 55.88 mm
db - Cone Backface Backing Diameter	2.44 in 61.98 mm
Da - Cup Frontface Backing Diameter	3.34 in 84.10 mm
Db - Cup Backface Backing Diameter	3.19 in 81.03 mm
Ab - Cage-Cone Frontface Clearance	0.07 in 1.8 mm
Aa - Cage-Cone Backface Clearance	0 in 0 mm
a - Effective Center Location³	-0.17 in -4.30 mm

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁴	5930 lbf 26400 N
C1 - Dynamic Radial Rating (1 million revolutions)⁵	22900 lbf 102000 N
C0 - Static Radial Rating	21500 lbf 95800 N
C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁶	3250 lbf 14400 N

Factors

K - Factor⁷	1.83
e - ISO Factor⁸	0.32
Y - ISO Factor⁹	1.88
G1 - Heat Generation Factor (Roller-Raceway)	33.8
G2 - Heat Generation Factor (Rib-Roller End)	12.7
Cg - Geometry Factor	0.0773

¹ These maximum fillet radii will be cleared by the bearing corners.

² These maximum fillet radii will be cleared by the bearing corners.

³ Negative value indicates effective center inside cone backface.

⁴ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.


⁵ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁶ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁷ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

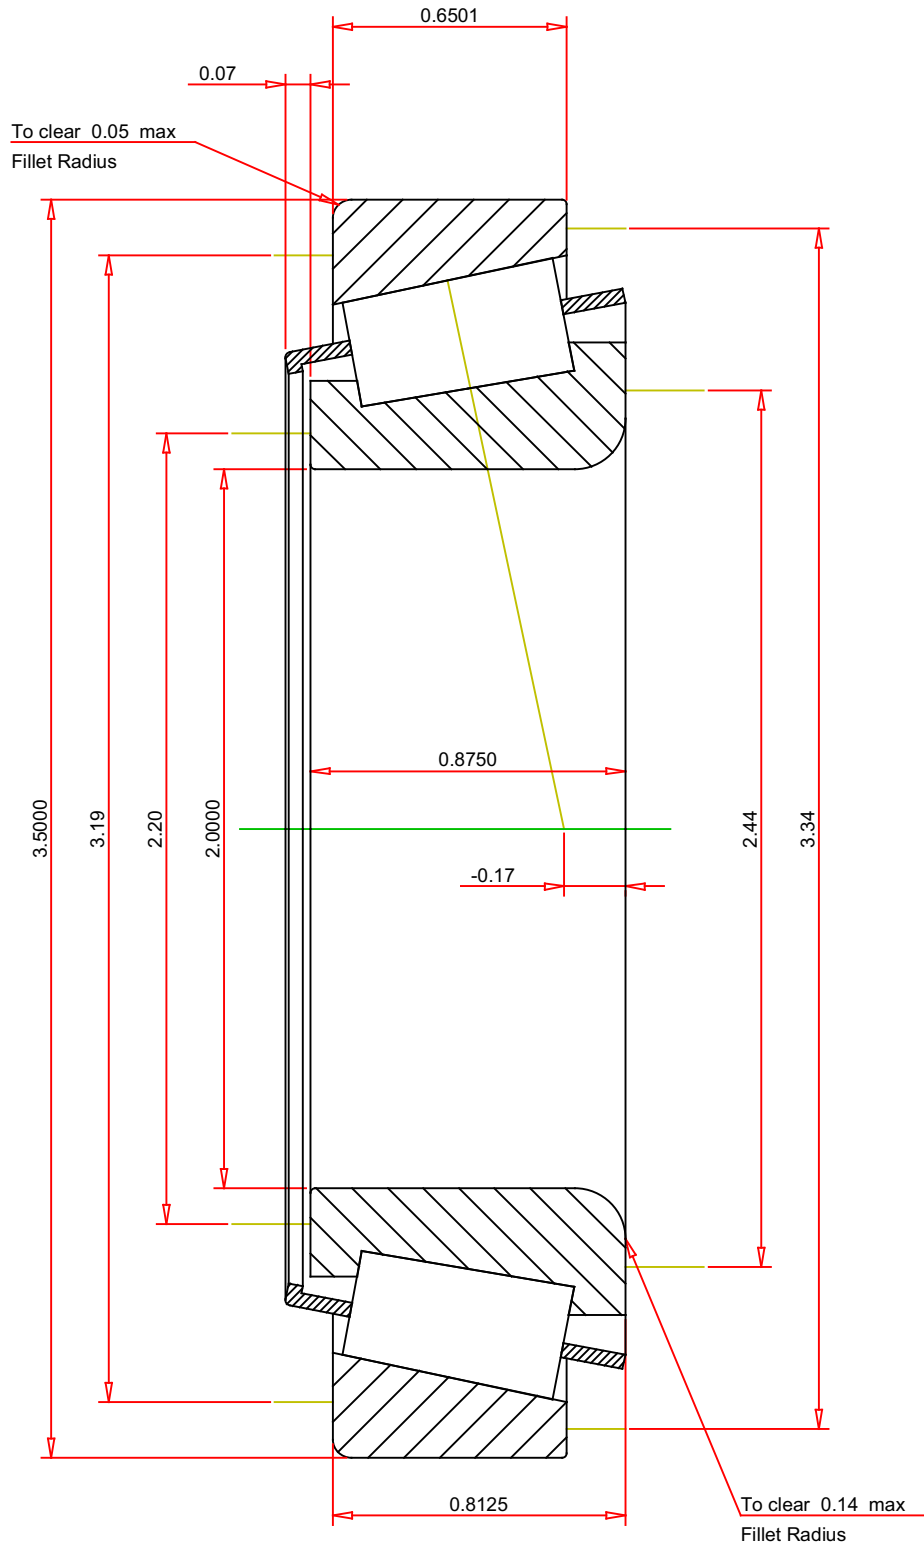

IMPERIAL UNITS

ISO Factor - e	0.32
ISO Factor - Y	1.88
Bearing Weight	1.1 lb
Number of Rollers Per Row	17
Effective Center Location	-0.17 inch

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

368A - 362A
TS BEARING ASSEMBLY

K Factor	1.83
Dynamic Radial Rating - C90	5930 lbf
Dynamic Thrust Rating - Ca90	3250 lbf
Static Radial Rating - C0	21500 lbf
Dynamic Radial Rating - C1	22900 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY