## **EQI CONTROLLER**




### **Features**

- Suitable for R404BL Pumps
- Brushless and sensorless
- Small size
- Speed governed
- Speed control pot
- Reverse direction control
- Enable function

# **RS PRO EQI CONTROLLER**

RS Stock No.: 125-3567

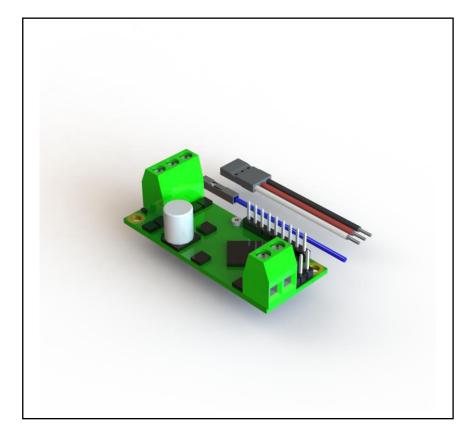

RS PRO is the own brand of RS. The RS PRO Seal of Approval is your assurance of professional quality, a guarantee that every part is rigorously tested, inspected, and audited against demanding standards. Making RS PRO the Smart Choice for our customers.

## **EQI CONTROLLER**



#### **Product Description**

EQi-R control board is highly efficient, small and lightweight device and can be quickly and easily installed into the smallest spaces, in a vast range of laboratory, prototype and production equipment.

The EQi will accept an input voltage of up to 28v DC. The output from the EQi can be controlled by either the on board speed control pot or from an external 0-4v input. The speed of the pump is 'Governed' above 12v to maintain a constant flow as the back pressure increases. Below 12v the pump speed will decrease as the voltage is lowered.

The EQi is also current limited to the maximum recommended input power of the R404BL to prevent damage to the pump.

#### **General Specifications**

Туре	EQi Controller
Input Connection	2 Screw terminal: Up to 28v/GND
Output Connection	3 Screw terminal: Phase WVU

Mechanical Specifications	
Dimensions	16 x 23 x 57mm
Weight	15g

Electrical Specifications	
Supply Voltage	6-28v
Maximum Amps (continuous)	6.5
Maximum Amps (Burst)	15

#### **Protection Category**

Safety Category Level	S1
IP Rating	IP 20



#### **Approvals**

Compliance/Certifications	ISO 9001 Quality Control Standard
Declarations	TCS Declaration of Conformity - RoHS Directive 2011/65/EU, SVCH,
	CMRT, 3TG and REACH compliant.

### **Similar Products**

Brand	For Use With
RS PRO	Suitable for all MGD1000 pumps
RS PRO	Suitable for all MGD2000 pumps
	Suitable for all M510 Pumps
NJ I NO	Suitable for all MSTOT ullips

