


# PUSHWIRE

## OPERATING INFORMATION

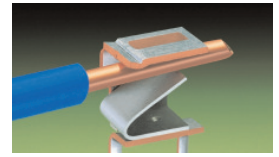

### 773 Series Junction Box connectors - for commoning solid and stranded conductors

**QUICK - SIMPLE - EASY TO USE - SAFE - VISIBLE CONNECTION**

Conductor Sizes & Stripping Lengths



0,75 ... 2,5 mm <sup>2</sup>	
solid	
AWG 18 - 12	12...13 mm
1,5 ... 2,5 mm <sup>2</sup>	
stranded	
AWG 14 - 12	12...13 mm
fine stranded	



2,5 ... 6 mm <sup>2</sup>	
solid	
AWG 14 - 10	12...13 mm
2,5 ... 6 mm <sup>2</sup>	
stranded ≤ 19	
AWG 14 - 10	12...13 mm
fine stranded	

Strip the conductor  
12mm

Use **ONLY**  
the cable  
recommended


Insert fully  
into the  
housing

To remove  
simply twist  
and pull

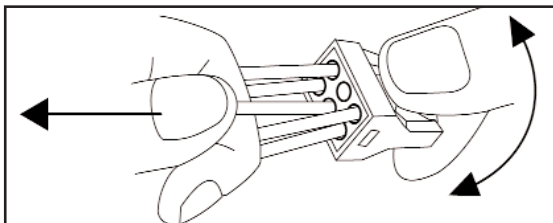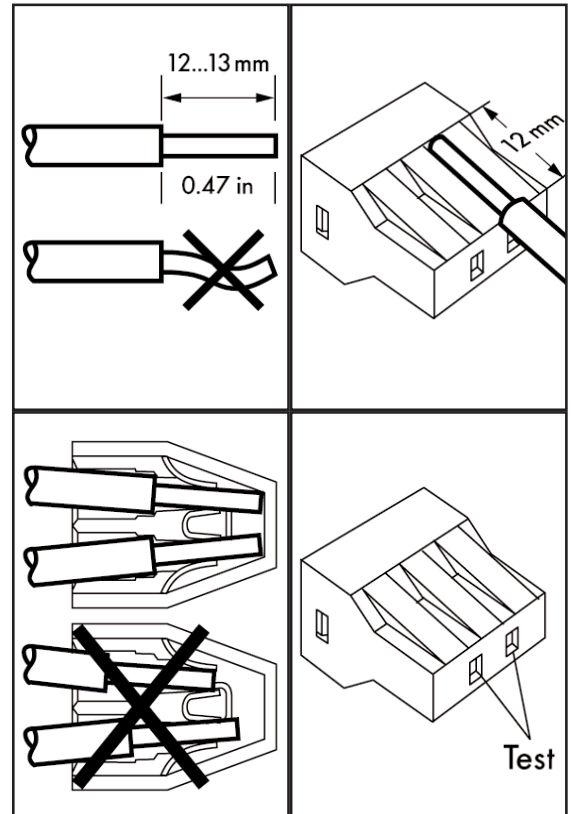


**773-102**

2 Conductor connector  
Yellow / transparent  
400V/4kV/2 - 24A




**773-104**

4 Conductor connector  
Orange / transparent  
400V/4kV/2 - 24A




**773-106**

6 Conductor connector  
Lilac / transparent  
400V/4kV/2 - 24A



**773-108**

8 Conductor connector  
Dark grey / transparent  
400V/4kV/2 - 24A



**773-173**

3 Conductor connector  
Red / transparent  
400V/4kV/2 - 41A

