






QX-6C

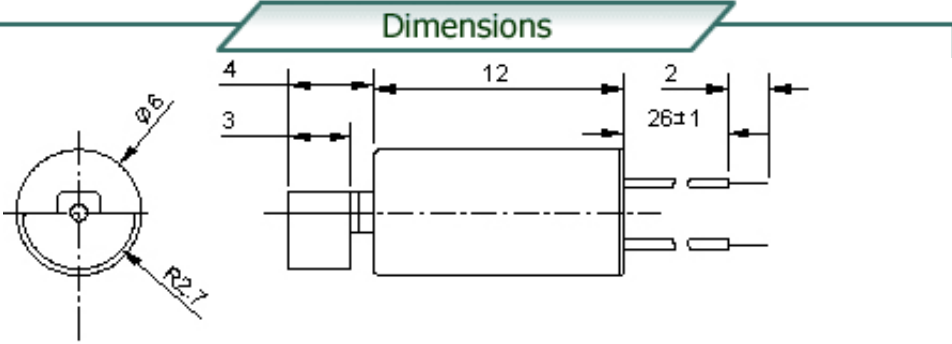


QX-6C-J

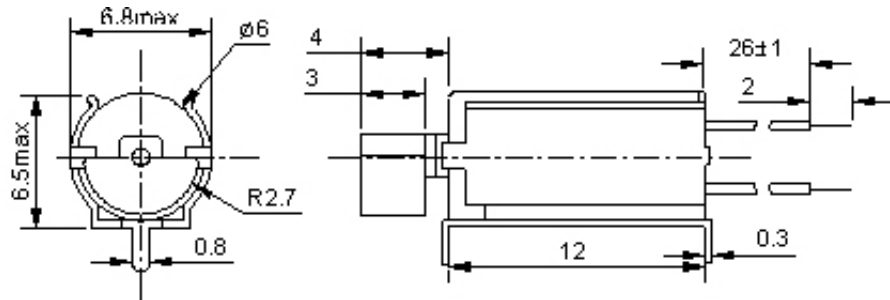

QX-6C01

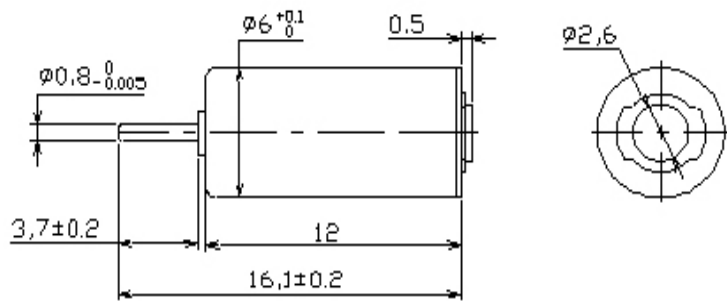

QX-6C02

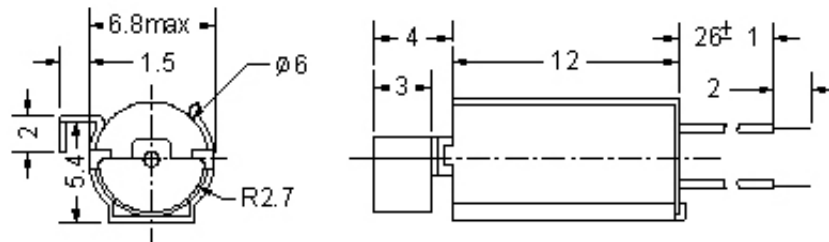

Model	Rated Voltage	Operating voltage	Rated Current	Rated Speed	Starting Voltage	Stall current	Terminal Resistance	End play of Shaft	Weight(approx)
	V	V	mA	rpm	V	mA	Ω(approx)	mm	g
QX6C	1.3	0.9-1.6	75Max	9500±2000	0.8Max	150Max	10.0	0.1-0.2	2.4
QX6C	3	2.0-3.6	80Max	9500±2000	1.4Max	150Max	24.0	0.1-0.2	2.4

▸ Dimensions of vibrator and holder can be tailor-made according to the customer's needs