

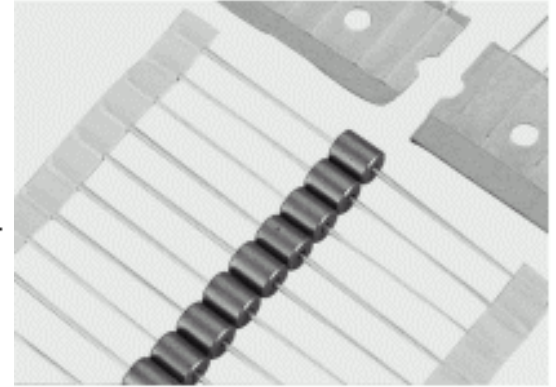


▼BF:AT SERIES(BEAD CORES AXIAL TAPPING)

1.ORDERING CODE

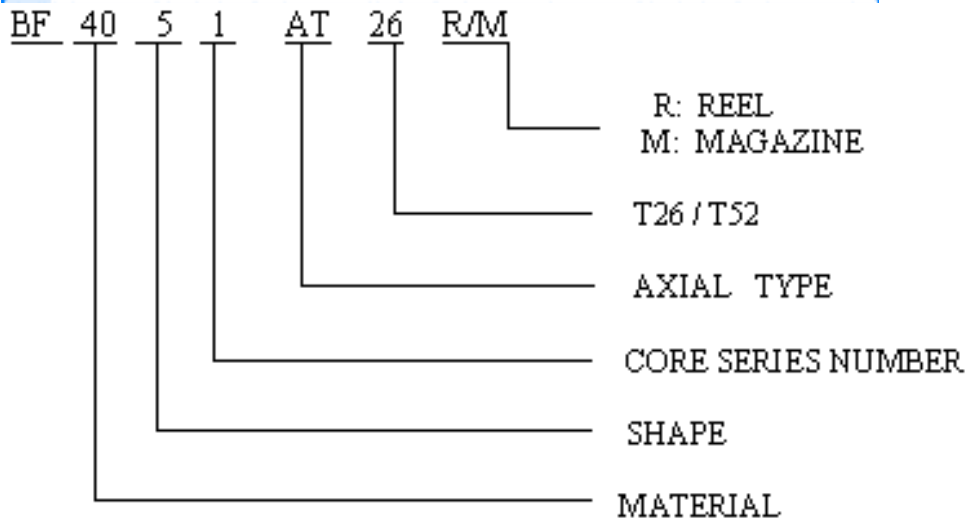

2.SHAPES

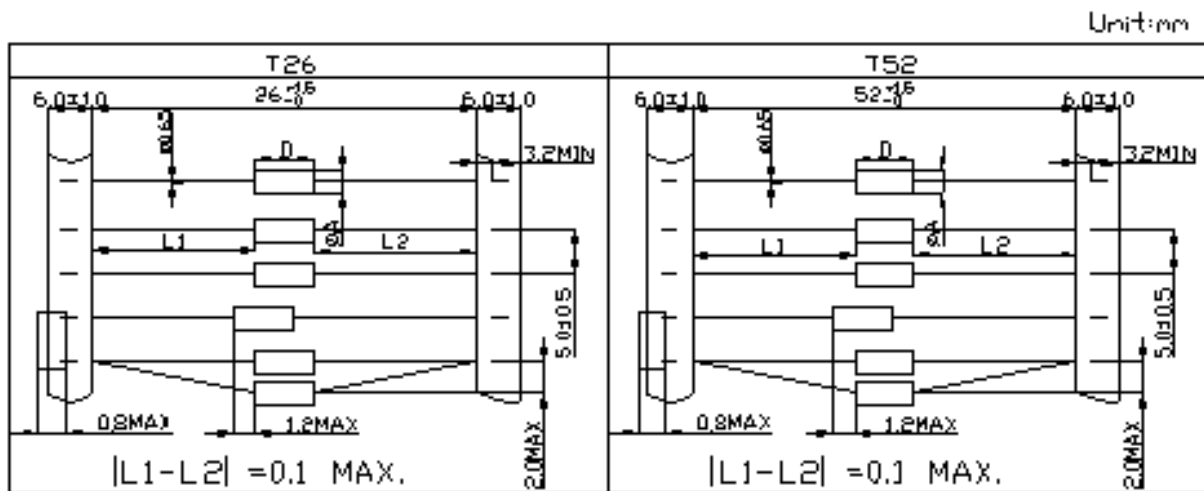

3.DIMENSIONS

NO.	FERRICO PART NO.	ΦA	D	IMPEDANCE(Ω)TYP./100MHz
1	<u>BF 4051</u>	3.5±0.15	4.40±0.2	74
2	<u>BF 8052</u>	3.5±0.15	6.00±0.3	84
3	<u>BF 4053</u>	3.5±0.15	8.00±0.3	124
4	<u>BF 4054</u>	3.5±0.15	9.00±0.3	145
5	<u>BF 4056</u>	3.5±0.15	5.00±0.3	78
6	<u>BF 4058</u>	3.5±0.15	4.70±0.2	76
7	<u>BF 405B</u>	2.5±0.15	5.00±0.3	66
8	<u>BF 405E</u>	3.5±0.15	14.0±0.5	214
9	<u>BF 405L</u>	3.5±0.15	3.00±0.2	56