


Mounting Instruction

SENCITY® Occhio Antenna 1399.32.0013, 1399.32.0014, 1399.32.0015, 1399.32.0016

Art. No. 85115709, 85114460, 85138318, 85137888

	Keep away from catenary and high voltages lines.	NOTICE Dimensions in millimeter [mm] and inches ["]
	Be Careful when working at height!	
	Always secure ladders! Always tighten screws! Be aware of strained springs	

Preparation of mounting hole

Drill hole of \varnothing 76mm / 3" (tolerance 76-80mm / 3"-3 1/8") in the suspended ceiling.

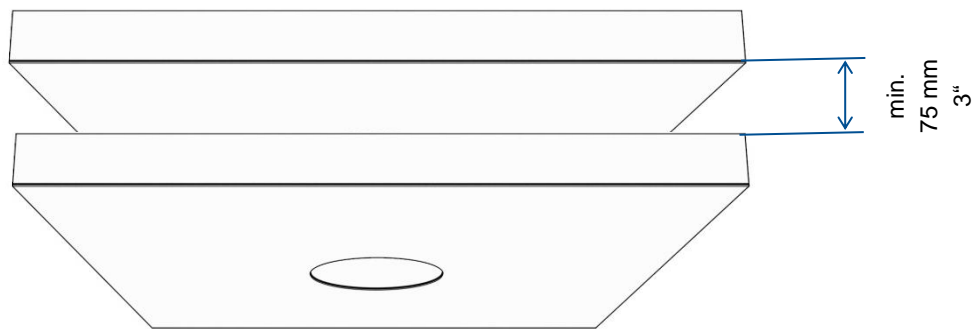


Figure 1: Clearance between the ceilings: Clearance between the solid and the suspended-ceiling shall be **> 75mm / 3"**

Installation of the bracket

Note the ceiling thickness and mount the spring in the related position

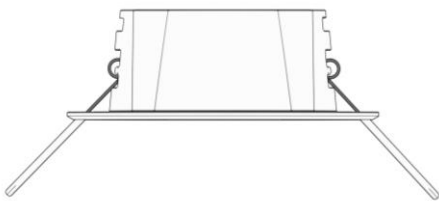


Figure 2: Lower mounting position
3-16mm / 0.1-5/8" ceiling thickness (pre mounted)

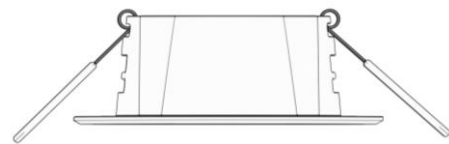


Figure 3: Upper mounting position
16-40mm / 5/8"-1 1/2" ceiling thickness

Turn up the two springs and hold them to insert the bracket-assembly into the hole. The springs will lock the bracket in the ceiling by releasing it.

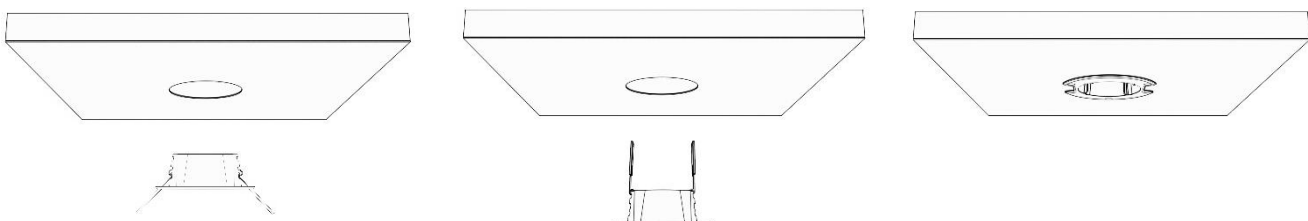


Figure 4: Mounting of the bracket in the ceiling

SENCITY[®] Occhio Antenna 1399.32.0013, 1399.32.0014, 1399.32.0015, 1399.32.0016

Installation of the antenna

Connect the jumper cables with the feeder cable of the base installation and pass the cable through the bracket. Connect the antenna to the jumper cables and push it inside the bracket.

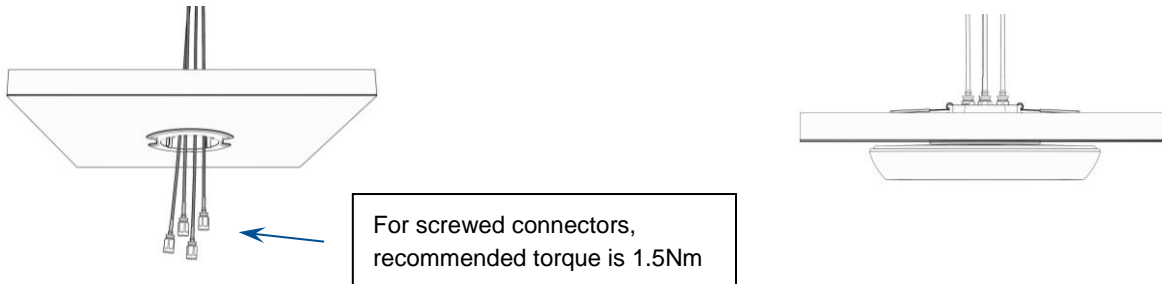


Figure 5: Installation of the Antenna

Dismounting of the antenna

To unlock the antenna place a flat screw driver between the antenna and the bracket and turn. The antenna will then unlock.

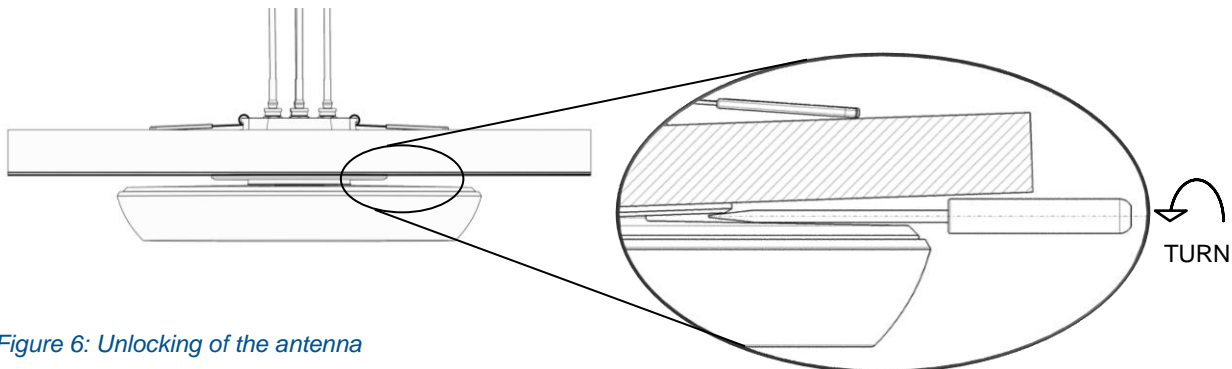


Figure 6: Unlocking of the antenna

General remarks

This product can be returned to HUBER+SUHNER for recycling at the end of its useful life. Please contact your local agent.

HUBER+SUHNER is certified according to ISO 9001, ISO 14001, ISO/TS 16949 und IRIS

Waiver: It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.