# 1239AS-H-1R0M# "#" indicates a package specification code.













< List of part numbers with package codes > 1239AS-H-1R0M=P2

### Shape





Rated current (Isat) is specified when the decrease of the initial inductance value at 30%.

Rated current (Itemp) is specified when temperature of the inductor is raised 40 °C by DC current.



#### References

Packaging code	Specifications	Minimum quantity
=P2	φ180mm Embossed taping	3000

1	Mass (Typ.)	
1 piece		0.0285g

## **Specifications**

Inductance	1.0μH ±20%
Inductance test frequency	1MHz
Rated current (Isat) (Based on Inductance change)	3000mA
Rated current (Itemp) (Based on Temperature rise)	3000mA
Max. of DC resistance	0.059Ω
Operating temperature range (Self-temperature rise is included)	-40°C to 85°C
Class of magnetic shield	Metal Alloy
Absolute maximum voltage	20V DC
Series	DFE252012C

1 of 2





<sup>1.</sup> This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





<sup>2.</sup> This datasheet has only typical specifications because there is no space for detailed specifications

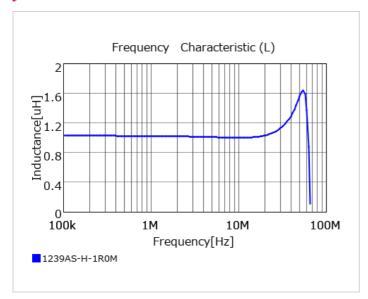

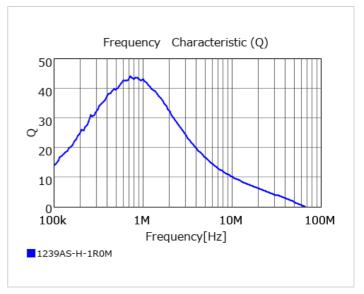

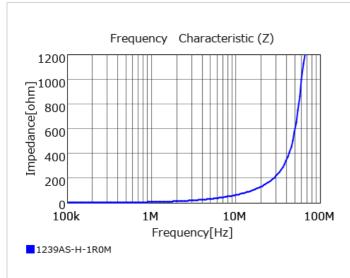

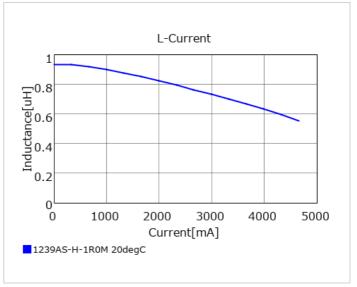

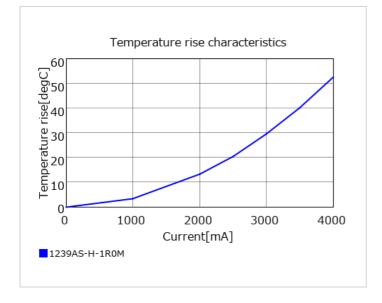

2 of 2



<sup>1.</sup> This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

<sup>2.</sup> This datasheet has only typical specifications because there is no space for detailed specifications

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata:

1239AS-H-1R0M=P2