


MICC






(Fixed Choke Coils)

Leaded Inductors / Medical Applications

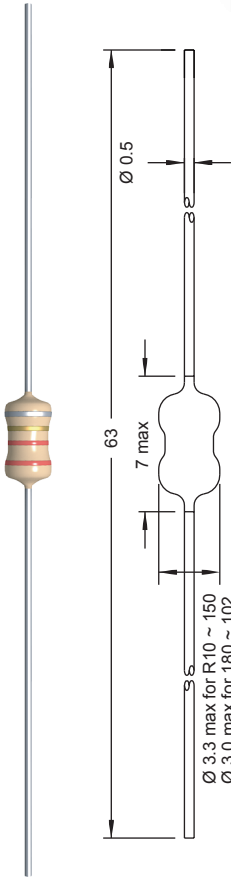

Medical applications (non-magnetic)

Part No	Inductance	f _L	ToI	Q	f _a	SRF	DCR	Rated DC	Core Material
	L (μH)	(MHz)	± (%)	min	(MHz)	min (MHz)	max (Ω)	Current (A)	
MICC-R10X-YY	0.10	1	10,20	35	25.2	600	0.11	1.10	Phenolic
MICC-R11X-YY	0.11	1	10,20	35	25.2	570	0.12	1.10	Phenolic
MICC-R12X-YY	0.12	1	10,20	35	25.2	570	0.12	1.08	Phenolic
MICC-R15X-YY	0.15	1	10,20	35	25.2	500	0.13	1.02	Phenolic
MICC-R18X-YY	0.18	1	10,20	35	25.2	460	0.14	1.00	Phenolic
MICC-R20X-YY	0.20	1	10,20	35	25.2	420	0.16	0.99	Phenolic
MICC-R22X-YY	0.22	1	10,20	35	25.2	420	0.16	0.99	Phenolic
MICC-R27X-YY	0.27	1	10,20	35	25.2	380	0.17	0.91	Phenolic
MICC-R33X-YY	0.33	1	10,20	35	25.2	330	0.20	0.83	Phenolic
MICC-R39X-YY	0.39	1	10,20	35	25.2	300	0.22	0.79	Phenolic
MICC-R47X-YY	0.47	1	10,20	35	25.2	280	0.25	0.75	Phenolic
MICC-R56X-YY	0.56	1	10,20	35	25.2	260	0.28	0.70	Phenolic
MICC-R68X-YY	0.68	1	10,20	35	25.2	240	0.48	0.53	Phenolic
MICC-R82X-YY	0.82	1	10,20	35	25.2	230	0.55	0.50	Phenolic
MICC-1R0X-YY	1.0	1	5,10,20	35	25.2	180	0.25	0.63	Ferrite
MICC-1R2X-YY	1.2	1	5,10,20	40	7.96	170	0.25	0.61	Ferrite
MICC-1R3X-YY	1.3	1	5,10,20	40	7.96	170	0.25	0.61	Ferrite
MICC-1R5X-YY	1.5	1	5,10,20	40	7.96	150	0.30	0.57	Ferrite
MICC-1R8X-YY	1.8	1	5,10,20	40	7.96	130	0.30	0.54	Ferrite
MICC-2R2X-YY	2.2	1	5,10,20	40	7.96	120	0.35	0.52	Ferrite
MICC-2R4X-YY	2.4	1	5,10,20	40	7.96	110	0.40	0.48	Ferrite
MICC-2R7X-YY	2.7	1	5,10,20	40	7.96	110	0.40	0.48	Ferrite
MICC-3R3X-YY	3.3	1	5,10,20	40	7.96	110	0.50	0.42	Ferrite
MICC-3R9X-YY	3.9	1	5,10,20	40	7.96	100	0.55	0.40	Ferrite
MICC-4R0X-YY	4.0	1	5,10,20	40	7.96	90	0.65	0.38	Ferrite
MICC-4R4X-YY	4.4	1	5,10,20	40	7.96	90	0.65	0.38	Ferrite
MICC-4R7X-YY	4.7	1	5,10,20	40	7.96	90	0.65	0.38	Ferrite
MICC-4R9X-YY	4.9	1	5,10,20	40	7.96	90	0.65	0.38	Ferrite
MICC-5R0X-YY	5.0	1	5,10,20	45	7.96	75	1.30	0.26	Ferrite
MICC-5R6X-YY	5.6	1	5,10,20	45	7.96	75	1.30	0.26	Ferrite
MICC-6R2X-YY	6.2	1	5,10,20	45	7.96	70	1.45	0.25	Ferrite
MICC-6R8X-YY	6.8	1	5,10,20	45	7.96	70	1.45	0.25	Ferrite
MICC-8R2X-YY	8.2	1	5,10,20	50	7.96	65	1.60	0.24	Ferrite
MICC-100X-YY	10	1	5,10,20	50	7.96	60	1.70	0.23	Ferrite
MICC-120X-YY	12	0.02	5,10,20	50	2.52	50	2.40	0.19	Ferrite
MICC-150X-YY	15	0.02	5,10,20	50	2.52	45	2.70	0.185	Ferrite
MICC-180X-YY	18	0.02	5,10,20	60	2.52	14	0.81	0.350	Ferrite
MICC-220X-YY	22	0.02	5,10,20	60	2.52	12	0.90	0.335	Ferrite
MICC-270X-YY	27	0.02	5,10,20	60	2.52	11	1.00	0.315	Ferrite
MICC-330X-YY	33	0.02	5,10,20	60	2.52	10	1.12	0.300	Ferrite
MICC-390X-YY	39	0.02	5,10,20	60	2.52	8.5	1.21	0.285	Ferrite
MICC-470X-YY	47	0.02	5,10,20	60	2.52	7.7	2.40	0.200	Ferrite
MICC-560X-YY	56	0.02	5,10,20	60	2.52	6.8	2.60	0.195	Ferrite
MICC-620X-YY	62	0.02	5,10,20	60	2.52	5.7	2.90	0.185	Ferrite
MICC-680X-YY	68	0.02	5,10,20	60	2.52	5.7	2.90	0.185	Ferrite
MICC-820X-YY	82	0.02	5,10,20	60	2.52	5.5	3.20	0.175	Ferrite
MICC-101X-YY	100	0.02	5,10,20	60	2.52	5.3	3.50	0.170	Ferrite
MICC-121X-YY	120	0.02	5,10,20	60	0.79	5.0	3.80	0.160	Ferrite
MICC-151X-YY	150	0.02	5,10,20	60	0.79	4.6	4.30	0.150	Ferrite
MICC-181X-YY	180	0.02	5,10,20	60	0.79	4.2	5.30	0.135	Ferrite
MICC-221X-YY	220	0.02	5,10,20	60	0.79	3.8	5.80	0.130	Ferrite
MICC-271X-YY	270	0.02	5,10,20	60	0.79	3.2	7.80	0.115	Ferrite
MICC-281X-YY	280	0.02	5,10,20	60	0.79	3.2	7.80	0.115	Ferrite
MICC-331X-YY	330	0.02	5,10,20	60	0.79	3.0	8.70	0.105	Ferrite
MICC-351X-YY	350	0.02	5,10,20	60	0.79	2.7	8.70	0.105	Ferrite
MICC-391X-YY	390	0.02	5,10,20	60	0.79	2.7	11.0	0.095	Ferrite
MICC-471X-YY	470	0.02	5,10,20	60	0.79	2.3	12.0	0.090	Ferrite
MICC-561X-YY	560	0.02	5,10,20	60	0.79	2.2	16.5	0.075	Ferrite
MICC-681X-YY	680	0.02	5,10,20	60	0.79	2.0	22.0	0.065	Ferrite
MICC-821X-YY	820	0.02	5,10,20	60	0.79	1.8	25.0	0.060	Ferrite
MICC-102X-YY	1000	0.02	5,10,20	60	0.79	1.5	33.0	0.055	Ferrite

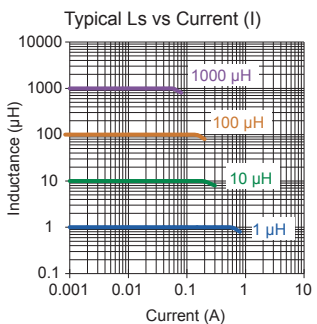

SPQ :

Packing Form	Taped / Reel	Taped / Ammo pack
Axial	4000 [-01]	1500 [-02]
Radial	2000 [-31]	3500 [-32]

Revision date : 08 Feb 2021

Remarks: MICC-R10X to MICC-R82X are suitable for medical applications.

- Bold figure for ToI% is standard
- All dimensions in mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fastron:

[MICC-1R0K-31](#) [MICC-R56M-01](#) [MICC-1R0K-01](#) [MICC/N-R22M-01](#) [MICC-R27M-01](#) [MICC-R18M-01](#) [MICC/N-R18M-01](#) [MICC/N-R47M-01](#) [MICC/N-R15M-01](#) [MICC-R82M-01](#) [MICC-R22M-01](#) [MICC-R68M-01](#) [MICC-101K-01](#) [MICC-3R3K-01](#) [MICC-4R7K-01](#) [MICC/N-100J-01](#) [MICC/N-101J-01](#) [MICC/N-102J-01](#) [MICC/N-120J-01](#) [MICC/N-150J-01](#) [MICC/N-151J-01](#) [MICC/N-1R0J-01](#) [MICC/N-1R2J-01](#) [MICC/N-1R5J-01](#) [MICC/N-1R8J-01](#) [MICC/N-220J-01](#) [MICC/N-221J-01](#) [MICC/N-2R2J-01](#) [MICC/N-330J-01](#) [MICC/N-331J-01](#) [MICC/N-390J-01](#) [MICC/N-3R3J-01](#) [MICC/N-3R9J-01](#) [MICC/N-470J-01](#) [MICC/N-470K-01](#) [MICC/N-471J-01](#) [MICC/N-4R7J-01](#) [MICC/N-561J-01](#) [MICC/N-5R6K-01](#) [MICC/N-681J-01](#) [MICC/N-6R8J-01](#) [MICC/N-820J-01](#) [MICC/N-8R2J-01](#) [MICC/N-R15K-01](#) [MICC/N-R22K-01](#) [MICC/N-R27K-01](#) [MICC/N-R39K-01](#) [MICC/N-R47K-01](#) [MICC/N-R68K-01](#) [MICC/N-R82K-01](#) [MICC/N-2R7J-01](#) [MICC/N-R10M-01](#) [MICC/N-R56M-01](#) [MICC/N-R68M-01](#) [MICC-R39M-01](#) [MICC/N-R12M-01](#) [MICC-R47M-01](#) [MICC-R12M-01](#) [MICC/N-1R0K-01](#) [MICC/N-R82M-01](#) [MICC-R33M-01](#) [MICC-R10M-01](#) [MICC/N-R39M-01](#) [MICC-R15M-01](#) [MICC/N-R27M-01](#) [MICC/N-R33M-01](#) [MICC-331K-02](#) [MICC-680K-01](#) [MICC/N-180J-01](#) [MICC/N-121J-01](#) [MICC-100K-02](#) [MICC/N-680J-01](#) [MICC-221K-02](#) [MICC/N-560J-01](#) [MICC/N-821J-01](#) [MICC/N-5R6J-01](#) [MICC/N-391J-01](#) [MICC-R68M-31](#) [MICC/N-R27M-31](#) [MICC/N-R22M-31](#) [MICC/N-R47M-02](#) [MICC-R18M-31](#) [MICC/N-R68M-02](#) [MICC/N-R33M-32](#) [MICC-R82M-02](#) [MICC/N-1R0K-32](#) [MICC/N-R12M-32](#) [MICC-R56M-02](#) [MICC-R47M-31](#) [MICC-R10M-32](#) [MICC/N-R15M-02](#) [MICC/N-R22M-32](#) [MICC-R10M-31](#) [MICC/N-R82M-02](#) [MICC/N-R68M-32](#) [MICC/N-1R0K-02](#) [MICC/N-R22M-02](#) [MICC/N-R15M-31](#) [MICC/N-R56M-02](#) [MICC/N-R18M-31](#)