


STM32 Nucleo pack for IO-Link multi-sensor device with stack v1.1.3



Features

- Equipped with Arduino UNO R3 connectors and compatible with [STEVAL-IOD003V1](#), [X-NUCLEO-IKS01A2](#) and [NUCLEO-L073RZ](#) boards
- The [STEVAL-IOD003V1](#) features:
 - IO-Link (PHY) device layer based on [L6362A](#)
 - Operating voltage range 6.5 to 35 V
 - Dedicated CQ overload pin (wake-up)
 - Diagnostics pin (UVLO, overtemperature and cut-off)
 - UART interface
 - Linear regulators for independent supply from +24 V bus (12 mA 3.3 V and 100 mA 12 V)
 - LEDs for status and diagnostics
 - Overload and overheating protections with non-dissipative cut-off function
 - Full reverse polarity on IO-Link interface pins
 - EMC protections according to IO-Link v1.1 and IEC 60947-5-2
 - Ground and V_{CC} wire break protections
- The [X-NUCLEO-IKS01A2](#) features:
 - [LSM6DSL](#) 3D accelerometer and 3D gyroscope
 - [LSM303AGR](#) 3D accelerometer and 3D magnetometer
 - [LPS22HB](#) pressure sensor
 - [HTS221](#) capacitive digital relative humidity and temperature
 - DIL24 socket for additional MEMS adapters and other sensors
 - Free comprehensive development firmware library and samples for all sensors compatible with [STM32Cube](#) firmware
- The [NUCLEO-L073RZ](#) features:
 - [STM32L073RZT6](#) 32-bit microcontroller based on ARM® Cortex®-M0+ core
 - Pre-programmed with [STSW-IOD01](#) (IO-Link device stack v1.1.3)
 - Arduino UNO R3 connectivity and ST morpho extension pin headers
 - Mbed-enabled (<http://mbed.org>)
 - On-board ST-LINK/V2-1 debugger/programmer with SWD connector

Product summary	
STM32 Nucleo pack for IO-Link multi-sensor device with Stack v1.1.3	P-NUCLEO-IOD01A1
IO-Link v1.1.3 sensor software for P-NUCLEO-IOD01A1	STSW-IOD01
IO-Link device evaluation board based on L6362A with Arduino connectors for STM32 Nucleo	STEVAL-IOD003V1
IO-Link communication transceiver device IC	L6362A
Motion MEMS and environmental sensor expansion board for STM32 Nucleo	X-NUCLEO-IKS01A2
Applications	Factory Automation IO-Link connectivity

Description


The [P-NUCLEO-IOD01A1](#) is an [STM32 Nucleo](#) pack composed of the [NUCLEO-L073RZ](#) development board, the [STEVAL-IOD003V1](#) evaluation board and the [X-NUCLEO-IKS01A2](#) expansion board.

The [STEVAL-IOD003V1](#) offers an IO-Link device PHY layer ([L6362A](#)) while the [NUCLEO-L073RZ](#) runs the IO-Link stack v1.1.3 included in the [STSW-IOD01](#) (developed by and property of TEConcept GmbH) and the firmware controlling the [X-NUCLEO-IKS01A2](#) sensors.

The STM32 Nucleo pack provides an affordable and easy-to-use solution for the development of IO-Link and SIO applications, [L6362A](#) communication features and robustness, together with the [STM32L073RZT6](#) computation performance.

1 P-NUCLEO-IOD01A1 main blocks

Figure 1. P-NUCLEO-IOD01A1 block details

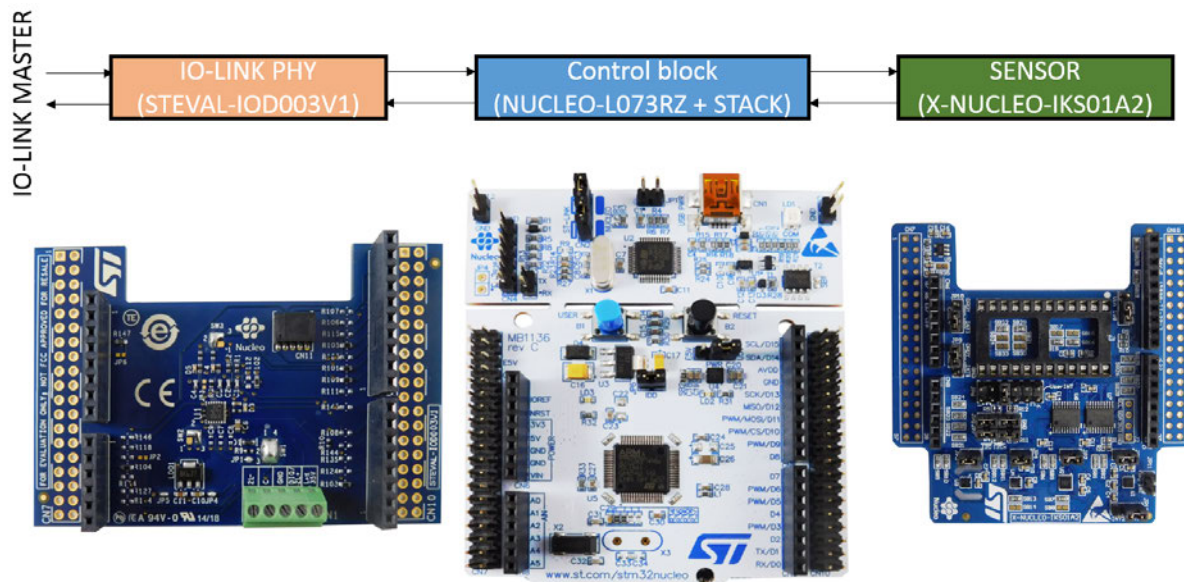

Revision history

Table 1. Document revision history

Date	Version	Changes
06-Jun-2018	1	Initial release.
04-Jul-2018	2	Removed schematic diagrams.
09-Oct-2018	3	Updated cover page features.
09-Jun-2020	4	Added references to STSW-IOD01 IO-Link v1.1.3 sensor software.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2020 STMicroelectronics – All rights reserved

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[STMicroelectronics:](#)

[P-NUCLEO-IOD01A1](#) [X-NUCLEO-IOD02A1](#)